

## NPPTL COVID-19 Response: International Respirator Assessment

Manufacturer: Dongguan Arun Industrial Co., Ltd.

Model Tested: N9

Date Tested: June 12, 2020

These findings pertain to the Dongguan Arun Industrial Co., Ltd., model N9. The packaging and labeling for this product indicate that it meets GB2626-2006 (the Chinese standard for Respiratory Protective Equipment – Non-Powered Air-Purifying Particle Respirator).

Thirty respirators were submitted for evaluation. The respirators were sampled into groups of ten for evaluation. The samples were tested using a modified version of NIOSH Standard Test Procedure (STP) TEB-APR-STP-0059. This modified assessment plan can be found [here](#).

No certificate of approval was provided with the samples received; therefore, the authenticity of the claims cannot be validated.

The maximum and minimum filter efficiency was 100.00% and 99.90%, respectively. All thirty respirators measured more than 95%.

While the above-listed product classification has similar performance requirements to NIOSH-approved devices, NIOSH does not have knowledge about the sustained manufacturer quality system and product quality control for these products. NIOSH also does not have knowledge about the product's handling and exposures after leaving its manufacturer's control.

In addition, this product is an ear loop design. Currently, there are no NIOSH-approved products with ear loops; NIOSH-approved N95s have head bands. Furthermore, limited assessment of ear loop designs, indicate difficulty achieving a proper fit. While filter efficiency shows how well the filter media performs, users must ensure a proper fit is achieved.

**This assessment is not a part of the NIOSH respirator approval process and will in no way lead to or preclude NIOSH approval through the official approval process.** This assessment was developed as an assessment of the filter efficiency for those respirator's represented as certified by an international certification authority, other than NIOSH, to support the availability of respiratory protection to US healthcare workers due to the respirator shortage associated with COVID-19. Only particulate filter efficiency was assessed.

The results provided in this letter are specific to the subset of samples that were provided to NPPTL for evaluation.

These results will be used to update the CDC guidance for [Crisis Capacity Strategies \(during known shortages\)](#).

## Evaluation of International Respirators

**Test:** Modified TEB-APR-STP-0059

**Date Tested:** June 12, 2020

**Report Prepared:** June 14, 2020

**Manufacturer:** Dongguan Arun Industrial Co., Ltd.

**Item Tested:** N9 (Sample Group 1 of 3)

**Country of Certification:** China (GB2626-2006)

Pictures have been added to the end of this report.

Filter	Flow Rate (Lpm)	Initial Filter Resistance (mmH <sub>2</sub> O)	Initial Percent Leakage (%)	Maximum Percent Leakage (%)	Filter Efficiency
1	85	13.2	0.06	0.06	99.94
2	85	11.8	0.10	0.10	99.90
3	85	12.1	0.02	0.02	99.98
4	85	13.7	0.03	0.03	99.97
5	85	13.2	0.07	0.07	99.93
6	85	12.0	0.02	0.02	99.98
7	85	13.4	0.00	0.00	100.00
8	85	13.1	0.11	0.11	99.89
9	85	13.5	0.09	0.10	99.90
10	85	12.7	0.02	0.02	99.98
<b>Minimum Filter Efficiency: 99.90</b>			<b>Maximum Filter Efficiency: 100.00</b>		

- The test method utilized in this assessment is not the NIOSH standard test procedure that is used for certification of respirators. Respirators assessed to this modified test plan do not meet the requirements of STP-0059, and therefore cannot be considered equivalent to N95 respirators that were tested to STP-0059.
- Respirators tested may not be representative of all respirators with the same certification mark. NIOSH has no control over suppliers and distributors of respirators certified by other national or international parties.
- This assessment is not a confirmation that it conforms with any or all of its specifications in accordance with its certification mark.
- This assessment was not a part of the NIOSH approval program. These results do not imply nor preclude a future approval through the NIOSH respirator approval program.

# NPPTL COVID-19 Response: International Respirator Assessment

**Test:** Modified TEB-APR-STP-0059

**Date Tested:** June 12, 2020

**Report Prepared:** June 14, 2020

**Manufacturer:** Dongguan Arun Industrial Co., Ltd.

**Item Tested:** N9 (Sample Group 2 of 3)

**Country of Certification:** China (GB2626-2006)

Filter	Flow Rate (Lpm)	Initial Filter Resistance (mmH <sub>2</sub> O)	Initial Percent Leakage (%)	Maximum Percent Leakage (%)	Filter Efficiency
11	85	12.7	0.04	0.04	99.96
12	85	13.8	0.01	0.01	99.99
13	85	13.2	0.00	0.01	99.99
14	85	11.3	0.05	0.05	99.95
15	85	11.6	0.06	0.07	99.93
16	85	13.3	0.02	0.02	99.98
17	85	12.3	0.01	0.01	99.99
18	85	13.0	0.06	0.06	99.94
19	85	12.2	0.06	0.07	99.93
20	85	11.9	0.06	0.07	99.93
<b>Minimum Filter Efficiency: 99.93</b>			<b>Maximum Filter Efficiency: 99.99</b>		

- The test method utilized in this assessment is not the NIOSH standard test procedure that is used for certification of respirators. Respirators assessed to this modified test plan do not meet the requirements of STP-0059, and therefore cannot be considered equivalent to N95 respirators that were tested to STP-0059.
- Respirators tested may not be representative of all respirators with the same certification mark. NIOSH has no control over suppliers and distributors of respirators certified by other national or international parties.
- This assessment is not a confirmation that it conforms with any or all of its specifications in accordance with its certification mark.
- This assessment was not a part of the NIOSH approval program. These results do not imply nor preclude a future approval through the NIOSH respirator approval program.

# NPPTL COVID-19 Response: International Respirator Assessment

**Test:** Modified TEB-APR-STP-0059

**Date Tested:** June 12, 2020

**Report Prepared:** June 14, 2020

**Manufacturer:** Dongguan Arun Industrial Co., Ltd.

**Item Tested:** N9 (Sample Group 3 of 3)

**Country of Certification:** China (GB2626-2006)

<b>Filter</b>	<b>Flow Rate (Lpm)</b>	<b>Initial Filter Resistance (mmH<sub>2</sub>O)</b>	<b>Initial Percent Leakage (%)</b>	<b>Maximum Percent Leakage (%)</b>	<b>Filter Efficiency</b>
<b>21</b>	85	12.9	0.05	0.05	99.95
<b>22</b>	85	12.6	0.03	0.03	99.97
<b>23</b>	85	11.3	0.04	0.04	99.96
<b>24</b>	85	11.8	0.04	0.04	99.96
<b>25</b>	85	11.9	0.07	0.07	99.93
<b>26</b>	85	13.0	0.05	0.05	99.95
<b>27</b>	85	12.2	0.03	0.03	99.97
<b>28</b>	85	12.8	0.05	0.05	99.95
<b>29</b>	85	13.2	0.03	0.03	99.97
<b>30</b>	85	12.9	0.07	0.07	99.93
<b>Minimum Filter Efficiency: 99.93</b>			<b>Maximum Filter Efficiency: 99.97</b>		

- The test method utilized in this assessment is not the NIOSH standard test procedure that is used for certification of respirators. Respirators assessed to this modified test plan do not meet the requirements of STP-0059, and therefore cannot be considered equivalent to N95 respirators that were tested to STP-0059.
- Respirators tested may not be representative of all respirators with the same certification mark. NIOSH has no control over suppliers and distributors of respirators certified by other national or international parties.
- This assessment is not a confirmation that it conforms with any or all of its specifications in accordance with its certification mark.
- This assessment was not a part of the NIOSH approval program. These results do not imply nor preclude a future approval through the NIOSH respirator approval program.



# NPPTL COVID-19 Response: International Respirator Assessment

**ARUN KN95 FACE MASK**  
GB2626-2006 KN95

The mask is designed according to the shape of the face,protect the face 360°. Adopt electrostatic ultrafilter,prevent dust efficiently. 3D breathable space,breathe comfortable.

**RANGE OF APPLICATION:**  
Suitable for respiratory protection,can filter the dust,haze,bacteria,droplets and other harmful substances in the air.Single use only and destroyed after use.

**⚠ WARNING**

1. The mask is not damaged or contaminated.
2. If you don't feel well,please leave the pollutional area immediately.
3. If you can't breathe easily,please change the mask.
4. Cleaning or remould is not allowed.
5. People with respiratory diseases should use this mask with caution.

**STORAGE REQUIREMENTS**


Product Name: KN95 face mask(non medical)	Specification: 105x168mm	Model: N9
Carried Standard: GB2626-2006 KN95	Raw Materials: Non Woven 70%, Melt Blown 30%	
Storage environment: Ventilated,out of the light,dry,away from fire.		
Storage temperature: -30°C-40°C		
Storage humidity: RH≤80%		
Storage life: Valid for 1 year.		

**Manufacturer: DONGGUAN ARUN INDUSTRIAL.CO.,LTD.**  
Address: No.18, Xinfeng street, Changlong Village,  
Huangjiang Town, Dongguan City, Guangdong.  
E-mail: Info@arun.hk

Made in China



6 957848 917929

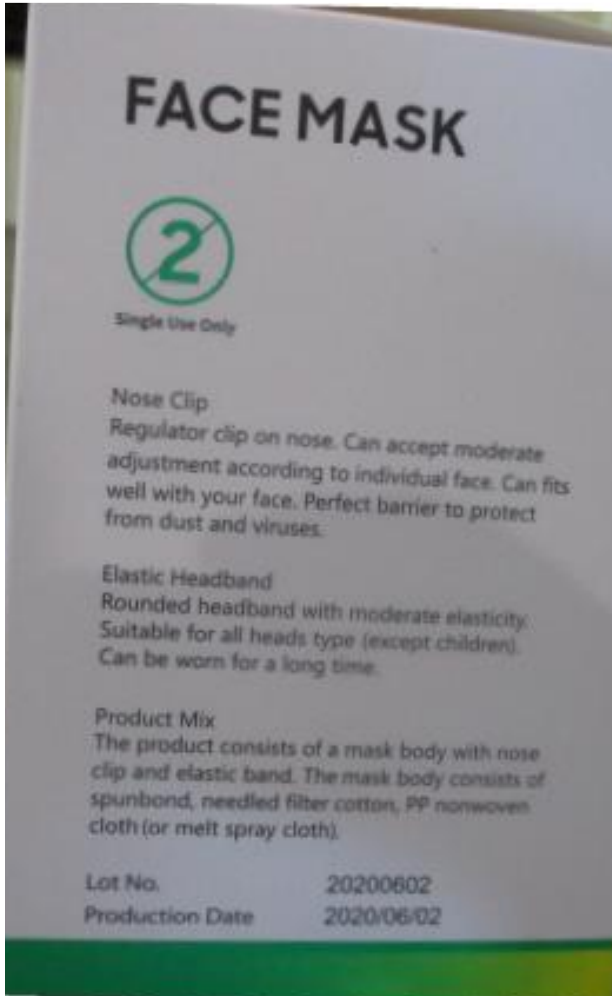


NPPTL COVID-19 Response: International Respirator Assessment





NPPTL COVID-19 Response: International Respirator Assessment

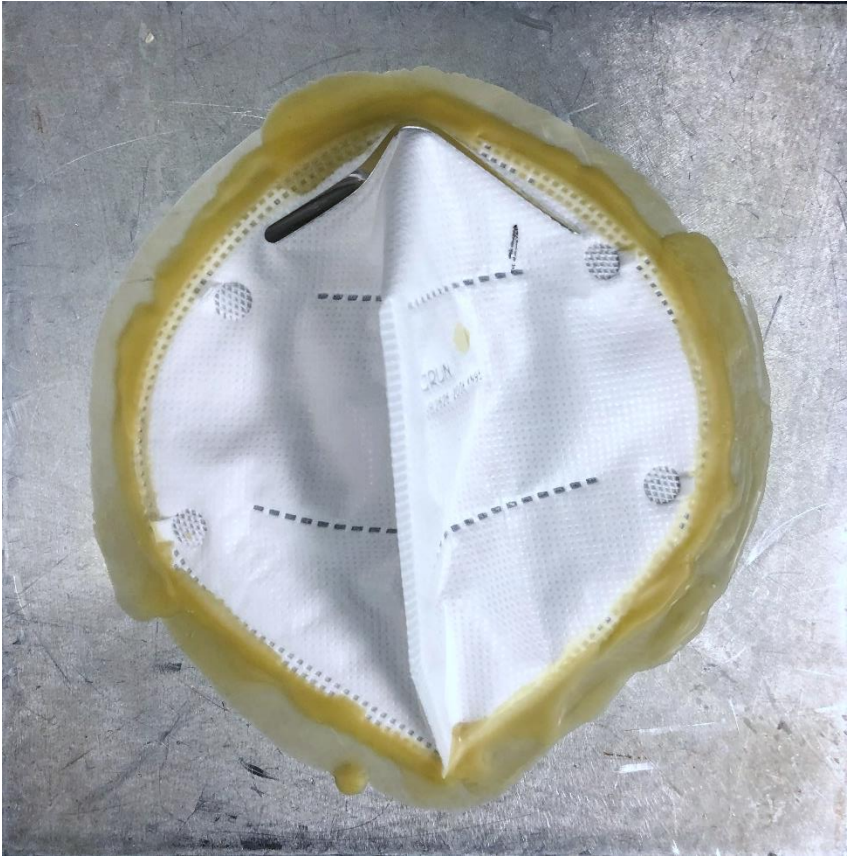

# NPPTL COVID-19 Response: International Respirator Assessment

