



Control of Ergonomic Hazards from Squeegee Handles in the Screen-Printing Industry

To cite this article: (1999) Control of Ergonomic Hazards from Squeegee Handles in the Screen-Printing Industry, , 14:12, 805-805, DOI: [10.1080/104732299302017](https://doi.org/10.1080/104732299302017)

To link to this article: <https://doi.org/10.1080/104732299302017>



Published online: 30 Nov 2010.



Submit your article to this journal [↗](#)



Article views: 16

Hazard Controls

Control of Ergonomic Hazards from Squeegee Handles in the Screen-Printing Industry

From the National Institute for Occupational Safety and Health

Definition of Hazard

Repetitive use of hand tools (particularly those that compress the palm of the hand and are held with a pinch or precision grip) may result in the development of carpal tunnel syndrome and other musculoskeletal disorders of the hand, wrist, and arm. Workers in the screen-printing industry use wooden-handled squeegees to force ink through a screen and into a substrate. The industry standard handle is approximately one inch wide and is grasped in both hands using a pinch grip. The narrowness of the grip requires forceful contractions by muscles in the forearm and wrist. When the user exerts significant downward forces with the handle, the handle places pressure on the mid-palm of the hands, causing possible compression of the median nerve.

Description of Controls

Studies funded by the National Institute for Occupational Safety and Health (NIOSH) indicate that redesign of the squeegee handle can significantly reduce hand pain and fatigue.

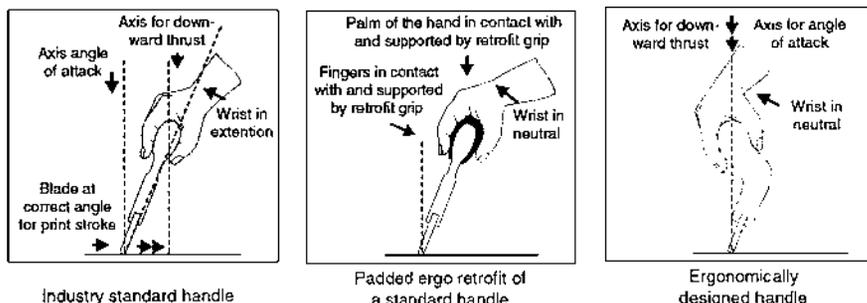


FIGURE 1
Squeegee handle designs.

Modified Squeegee Handle

Squeegee handles for manual screen print workers should be designed to conform to the shape of the hand when in a somewhat relaxed and open position (see Figure 1). The handle surface should make full contact with the fingers and surface of the palm of the hand. The diameter of the grip should be at least 18 percent wider than the grip diameter of the industry standard handle. Padding the handle with a compressible surface has been shown to reduce hand pain and fatigue significantly when used over time and may result in lower carpal tunnel pressures. Standard squeegee handles can be modified by adding compressible rubber grips. Handles/padding should be provided in varying widths and diameters to accommodate workers with different hand sizes.

For More Information

To obtain more information about controlling this hazard or for information about other occupational health and safety issues, call NIOSH at 1-800-35-NIOSH (1-800-356-674), or visit the NIOSH Home Page on the World Wide Web at <http://www.cdc.gov/niosh/homepage.html>.

Acknowledgments

The principal contributors to this Hazard Controls are Katharyn A. Grant and Jerome P. Fleisch, NIOSH. Research was performed under NIOSH Grant 1R43 OHO3357-01, Effect of Squeegee Design on Carpal Tunnel Pressure. This Hazard Controls is DHHS (NIOSH) Publication No. 97-137.