

The Influence of Heavy Truck Egress Tactics on Ground Reaction Force

Matthew P. Reed, Suzanne G. Hoffman, Sheila M. Ebert-Hamilton
University of Michigan Transportation Research Institute,
2901 Baxter Road, Ann Arbor, Michigan, 48109, USA

Slips and falls during cab egress are an important cause of injuries to truck drivers. Previous work has shown that the egress tactics may influence risk. Inward-facing tactics (driver faces the truck) are universally recommended, but biomechanical evidence supporting this recommendation is sparse. As part of a laboratory study of truck driver ingress and egress behavior, the ground reaction forces during first contact with the ground on egress were recorded for both inward and outward facing egress tactics using either interior or exterior hand holds and four step configurations. Twenty-five male and five female truck drivers with a wide range of body size participated. Peak vertical ground reaction force (PVGRF) averaged 1.44 times body weight for the inward-facing tactic and 1.85 times body weight for the outward-facing tactic. Handle position (interior vs. exterior) and step configuration did not affect PVGRF. Drivers with high body mass index choose inward-facing tactics more frequently than other drivers. The average 28-percent increase in peak ground reaction force with the outward-facing tactic may indicate an increased risk of both cumulative and acute injury.

Introduction

Truck drivers are frequently injured entering and exiting tractor-trailer cabs. Lin and Cohen [1997] studied data from injury reports obtained from U.S. trucking companies. Of the slip-and-fall injuries reported, approximately 25% occurred while workers were mounting, dismounting, entering, or exiting vehicles. Egress injuries were three times more common than ingress injuries. Jones and Switzer-McIntyre [2003] identified 352 cases of falls from non-moving vehicles as part of a workplace safety study in Ontario. In 24% of these cases the driver slipped or fell from a step on the truck.

Drivers are routinely trained to enter and exit the truck facing inward, toward the cab, but drivers often exit facing away. In a study of firefighters exiting a truck, ground reaction forces were significantly higher when facing away from the vehicle than when facing the vehicle [Giguere and Marchand 2005]. Using a sample of 10 men, researchers at Liberty Mutual Research Center demonstrated that truck egress tactics affected ground reaction forces, with vertical forces up to 12 times body weight observed for men jumping down from a high cab-over-engine truck [Cotnam and Fatallah 1998; Fathallah and Cotnam 2000].

As part of a broader effort to develop improved design guidelines and assessment tools for truck ingress and egress, a laboratory study was conducted with experienced drivers. This paper presents an analysis of the influence of step configuration, hand hold position, tactic, and driver characteristics on ground reaction force.

Methods

Mockup

A reconfigurable laboratory mock up was constructed to represent the critical features of the ingress/egress system of a conventional tractor cab (Figure 1). A force platform was located in the floor adjacent to the mock up as well as on the adjustable steps and hand holds. The force platform on the ground and the surrounding platform area were covered with a concrete tile material (Hardiboard) with a coefficient of friction similar to concrete pavement. The hand hold at the rear of the door opening was either within the door opening (internal) or outside and rearward of the door opening (external). The internal rear handle was presented with an internal front handle at approximately the same height.

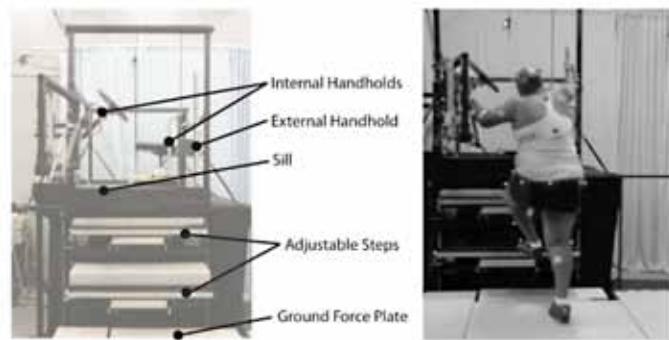


Figure 1. Laboratory mock up, showing handles, adjustable steps, and ground force plate

Subjects

Testing was conducted with 25 male and 5 female truck drivers, all licensed to drive tractor-trailers in Michigan. The drivers' statures ranged from 1554 to 1902 mm (median 1763 mm) and body weight from 69 to 179 kg (median 90 kg). Body mass index (BMI), calculated as body weight in kg divided by stature in meters squared, ranged from 22 to 50, with a median of 30 kg/m². Drivers ranged in age from 22 to 65 years (median 50 years), and had between one and fifty years of driving experience (median 12 years).

Test Conditions and Procedures

Participants were tested with four step configurations selected to span a substantial percentage of the U.S. truck fleet with respect to the lateral step placement. Each step configuration was tested with internal hand holds and with external hand holds (see Figure 1). The hand holds on the door were always available.

In the first trial in each condition, no instructions as to tactic were given, and the tactics chosen by the drivers (inward or outward facing) were recorded for each egress event. Following undirected trials in all conditions, each test condition was repeated, except that on egress the driver was directed to use the alternative tactic. For example, a driver who chose to exit facing outward in a particular condition was instructed to face inward for the corresponding directed trials.

Data and Analysis

Ground reaction forces were recorded at 3 kHz and low-pass hardware-filtered at 100 Hz, then down sampled to 100 Hz for analysis. The highest peak vertical force was generally observed immediately following the initial foot contact with the force plate. The forces at the maximum vertical peak were extracted for analysis. Data from 28 trials were excluded because the participant's foot partially missed the force platform. The vertical reaction force was normalized by dividing by body weight. The required coefficient of friction was calculated by dividing the resultant horizontal force by the vertical force.

Analysis of variance (ANOVA) was conducted to assess the effects of step configuration, hand hold placement, tactic, and tactic instruction (directed vs. undirected). The effects of stature and BMI were also investigated. Statistical analyses were conducted in the software package R (www.r-project.org).

Results

Table 1 shows the selection of inward/outward tactic for undirected trials by BMI category. Drivers with high BMI were significantly more likely to choose inward-facing egress tactics ($2(1) = 13.6$, $p < 0.001$). Tactic selection was not significantly affected by step or hand hold configurations.

Table 1. Egress tactic selection in undirected trials

Number of Trials	Body Mass Index (kg/m2)	
	< 30	≥ 30
Inward Facing	56	92
Outward Facing	57	33

Figure 2 shows peak vertical ground reaction force (PVGRF) across conditions. PVGRF was significantly affected ($p<0.001$) by egress tactic, investigator direction, and BMI. ANOVA showed a significant three-way interaction ($p<0.001$) among these variables, which is made apparent by the box plots in Figure 3. The overall mean PVGRF was 1.64 times body weight (BW) with a large scatter across trials. The mean was higher for directed than for undirected trials, 1.76 BW vs. 1.53 BW. PVGRF was higher for outward-facing than for inward-facing egress, but the magnitude of the increase differed across BMI groups and whether the trial tactic was directed or undirected.

In the undirected trials, with drivers choosing their egress tactic, non-obese drivers ($BMI < 30 \text{ kg/m}^2$) showed much larger average increases in PVGRF than obese drivers. In the directed trials, which forced the heavier drivers who had chosen inward-facing egress to switch to outward-facing, both high and low BMI groups showed similar increases in mean PVGRF between inward- and outward-facing tactics. Overall, in undirected trials, drivers who exited facing away from the steps experienced average peak ground reaction forces of 1.75 times body weight, compared with 1.25 times for those who exited facing the steps. Averaging across all trials captures the same number of inward- and outward-facing egress events for each driver, and hence gives the best estimate of the within-subject increase in force resulting from a change in tactics (excepting missing data). Using these values, PVGRF in outward-facing egress was 28% higher (1.85 vs. 1.44 times body weight).

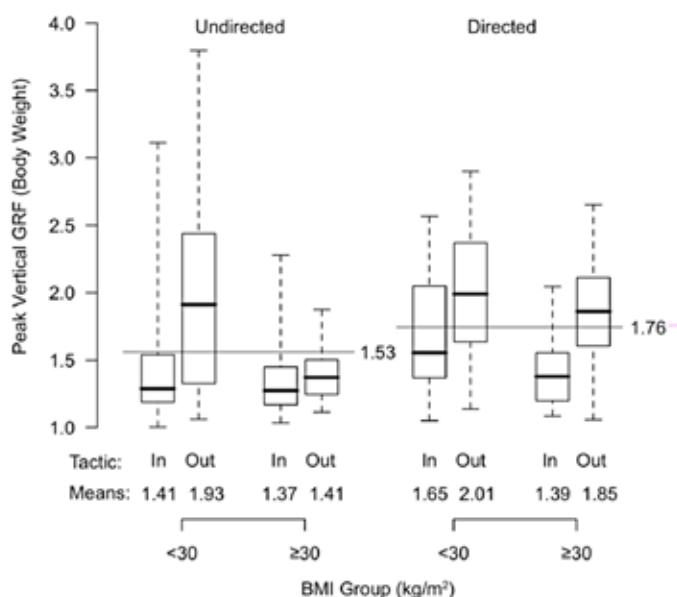


Figure 2. Effects of BMI, inward/outward-facing egress tactic, and investigator direction on peak vertical ground reaction force normalized by body weight. Boxes show median and interquartile range, whiskers span the range of the data. Numeric values on the plot are group means.

RCOF was significantly affected only by tactic ($p<0.001$) and the effect was small. The mean RCOF was 0.085 for inward-facing and 0.07 for outward-facing egress.

Discussion

The lower ground reaction forces observed with inward-facing egress provide a biomechanical justification for recommending that tactic, since lower ground reaction forces are associated with reduced tissue stresses. In undirected trials, drivers with higher BMI were more likely to chose the lower-stress tactic, providing some evidence of risk compensation. Surprisingly, step and hand hold configuration did not affect either tactic selection or ground reaction force. A more detailed analysis is needed, but one possibility is that driver tactic preference based on years of

experience tends to override any effects of short-duration exposure to a new step and hand hold configuration. The data show large inter-subject variability, however, and tactic changes may have occurred within the broad categories used here.

These data are limited by the laboratory setting and test equipment. Some drivers moved more slowly than is typical for drivers in their own trucks, which likely makes the current conclusions conservative – higher-speed egress would lead to higher PVGRF and an increased risk for outward-facing egress. The postures at the time of ground contact also differ substantially between tactics and may lead to different stress even with the same ground reaction force.

Acknowledgements

This research was supported in part by grant number 1-R01-OH009153-01 from the Centers

for Disease Control and Prevention – National Institute for Occupational Safety and Health. Its contents are solely the responsibility of the authors and do not necessarily represent the official views of NIOSH.

References

Cotnam JP, Fathallah FA [1998]. Landing forces resulting from existing tractors and trailers. Warrendale, PA: SAE International, SAE Technical Paper 982754.

Fathallah FA, Cotnam JP [2000]. Maximum forces sustained during various methods of exiting commercial tractors, trailers, and trucks. *Appl Ergon* 31:25–33.


Lin LJ, Cohen HH [1997]. Accidents in the trucking industry. *Int J Ind Erg* 20:287–300.

Jones D, Switzer-McIntyre S [2003]. Falls from trucks: a descriptive study based on a workers compensation database. *Work* 20:179–184.

2010 International Conference on

Fall Prevention and Protection



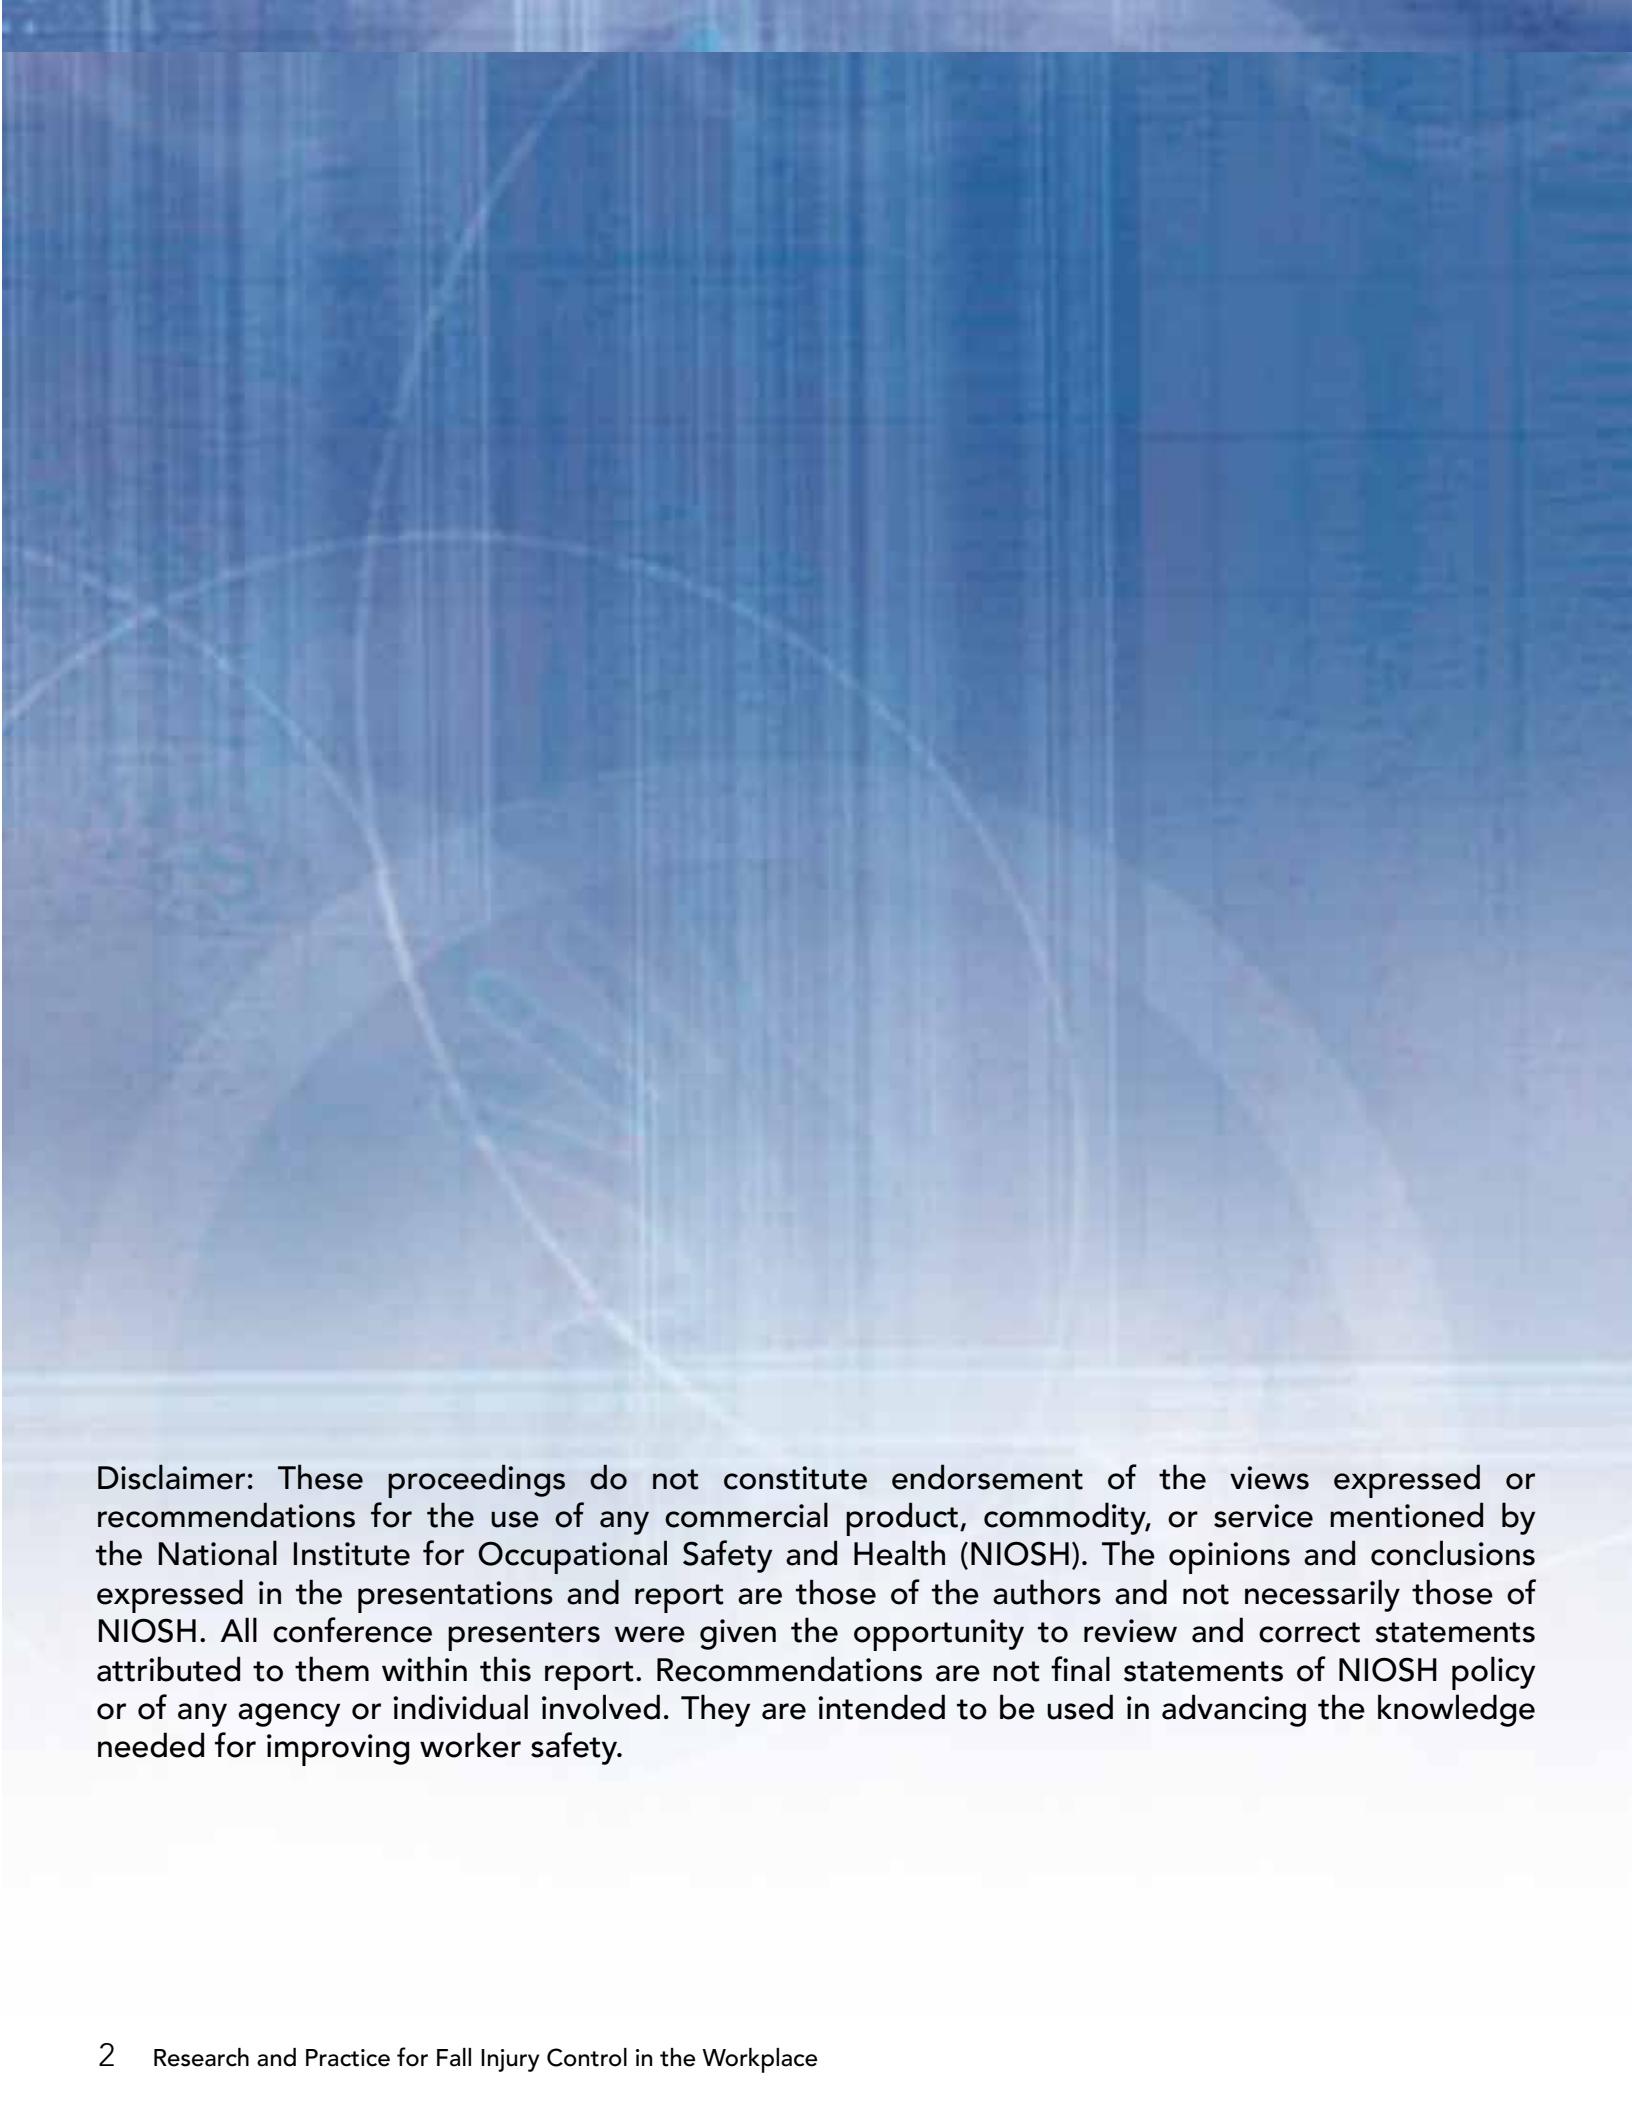

Disclaimer: These proceedings do not constitute endorsement of the views expressed or recommendations for the use of any commercial product, commodity, or service mentioned by the National Institute for Occupational Safety and Health (NIOSH). The opinions and conclusions expressed in the presentations and report are those of the authors and not necessarily those of NIOSH. All conference presenters were given the opportunity to review and correct statements attributed to them within this report. Recommendations are not final statements of NIOSH policy or of any agency or individual involved. They are intended to be used in advancing the knowledge needed for improving worker safety.

Research and Practice for Fall Injury Control in the Workplace:

Proceedings of International Conference on Fall Prevention and Protection

This document is in the public domain and may be freely copied or reprinted.

Disclaimer

Mention of any company or product does not constitute endorsement by the National Institute for Occupational Safety and Health (NIOSH). In addition, citations to Web sites external to NIOSH do not constitute NIOSH endorsement of the sponsoring organizations or their programs or products.

Furthermore, NIOSH is not responsible for the content of these Web sites. All Web addresses referenced in this document were accessible as of the publication date.

Ordering Information

To receive documents or other information about occupational safety and health topics, contact NIOSH at

Telephone: 1-800-CDC-INFO (1-800-232-4636)

TTY: 1-888-232-6348

E-mail: cdcinfo@cdc.gov

or visit the NIOSH Web site at www.cdc.gov/niosh.

For a monthly update on news at NIOSH, subscribe to NIOSH eNews by visiting www.cdc.gov/niosh/eNews

DHHS (NIOSH) Publication No. 2012-103

November 2011

SAFER • HEALTHIER • PEOPLE™