



## Original article

Scand J Work Environ Health 2016;42(4):329-337

doi:10.5271/sjweh.3569

### Improving safety climate through a communication and recognition program for construction: a mixed methods study by Sparer EH, Catalano PJ, Herrick RF, Dennerlein JT

We evaluated the efficacy of a novel safety communication and recognition program (B-SAFE), designed to encourage improvement of physical working conditions and hazard reduction in construction. Using mixed methods, we determined that B-SAFE led to many positive changes, including an improvement in safety climate, awareness, team-building, and communication. The study has important implications for both research and practice.

**Affiliation:** Department of Physical Therapy, Movement, and Rehabilitation Sciences, Bouvé College of Health Sciences, Northeastern University, 301 Robinson Hall, 360 Huntington Ave, Boston, MA 02115, USA. [j.dennerlein@northeastern.edu](mailto:j.dennerlein@northeastern.edu)

**Key terms:** B-SAFE; communication; construction; construction industry; construction worker; hazard control; health and safety; mixed method; mixed-method study; recognition; safety; safety climate; safety incentive program; safety intervention

This article in PubMed: [www.ncbi.nlm.nih.gov/pubmed/27158914](http://www.ncbi.nlm.nih.gov/pubmed/27158914)

### Additional material

Please note that there is additional material available belonging to this article on the *Scandinavian Journal of Work, Environment & Health*-website.

## Improving safety climate through a communication and recognition program for construction: a mixed-methods study

by Emily H Sparer, ScD,<sup>1,2</sup> Paul J Catalano, ScD,<sup>3,4</sup> Robert F Herrick, ScD,<sup>1</sup> Jack T Dennerlein, PhD<sup>1,5</sup>

Sparer E, Catalano PJ, Herrick RF, Dennerlein JT. Improving safety climate through a safety communication and recognition program for construction: a mixed-methods study. *Scand J Work Environ Health*. 2016;42(4):239–337. doi:10.5271/sjweh.3569

**Objectives** This study aimed to evaluate the efficacy of a safety communication and recognition program (B-SAFE), designed to encourage improvement of physical working conditions and hazard reduction in construction.

**Methods** A matched pair cluster randomized controlled trial was conducted on eight worksites (four received the B-SAFE intervention, four served as control sites) for approximately five months per site. Pre- and post-exposure worker surveys were collected at all sites (N=615, pre-exposure response rate of 74%, post-exposure response rate of 88%). Multi-level mixed-effect regression models evaluated the effect of B-SAFE on safety climate as assessed from surveys. Focus groups (N=6–8 workers/site) were conducted following data collection. Transcripts were coded and analyzed for thematic content using Atlas.ti (version 6).

**Results** The mean safety climate score at intervention sites, as measured on a 0–50 point scale, increased 0.5 points (1%) between pre- and post-B-SAFE exposure, compared to control sites that decreased 0.8 points (1.6%). The intervention effect size was 1.64 (3.28%) (P-value=0.01) when adjusted for month the worker started on-site, total length of time on-site, as well as individual characteristics (trade, title, age, and race/ethnicity). At intervention sites, workers noted increased levels of safety awareness, communication, and teamwork compared to control sites.

**Conclusions** B-SAFE led to many positive changes, including an improvement in safety climate, awareness, teambuilding, and communication. B-SAFE was a simple intervention that engaged workers through effective communication infrastructures and had a significant, positive effect on worksite safety.

**Key terms** B-SAFE; construction industry; construction worker; hazard control; health and safety; safety incentive program; safety intervention.

Recent decades have brought large improvements to health and safety conditions in the construction industry, yet the number of fatal and non-fatal injuries remains extremely high (1). To combat this, some employers have implemented safety incentive programs, such as those that use injury-based safety performance metrics to evaluate overall worksite safety and reward workers. However, these lagging indicator-based programs may discriminate against injured workers (2) and may reduce injury reporting (3, 4).

As an alternative, programs could rely instead on leading indicators of safety, such as hazard control and other root causes of injuries. In partnership with individuals from the local construction industry, we developed a lead-

ing indicator-based program, also known as a safety communication and recognition program, B-SAFE ([www.northeastern.edu/b-safe](http://www.northeastern.edu/b-safe)) (5). B-SAFE facilitates communication between workers and management regarding hazard controls as identified by safety inspections completed by in-house safety professionals. The program uses frequent (more than once per week) inspections that communicate positive safe working conditions (eg, recognizing the use of hazard controls). The B-SAFE program was designed to be an add-on to an existing health and safety program in which regular safety inspections are part of safety management system. However, the efficacy and effectiveness of the B-SAFE program on changing safety conditions and preventing injuries is unknown.

<sup>1</sup> Department of Environmental Health, Harvard T.H. Chan School of Public Health, Boston, MA, USA.

<sup>2</sup> Department of Social and Behavioral Sciences, Harvard T.H. Chan School of Public Health, Boston, MA, USA.

<sup>3</sup> Department of Biostatistics, Harvard T.H. Chan School of Public Health, Boston, MA, USA.

<sup>4</sup> Department of Biostatistics and Computational Biology, Dana-Farber Cancer Institute, Boston, MA, USA.

<sup>5</sup> Department of Physical Therapy, Movement, and Rehabilitation Sciences, Bouvé College of Health Sciences, Northeastern University, Boston, MA, USA.

Correspondence to: Jack Dennerlein, Department of Physical Therapy, Movement, and Rehabilitation Sciences, Bouvé College of Health Sciences, Northeastern University, 301 Robinson Hall, 360 Huntington Ave, Boston, MA 02115, USA. [E-mail: j.dennerlein@northeastern.edu]

Our aim was to evaluate the efficacy of B-SAFE on measures of safety at the worksite through a cluster randomized controlled trial (RCT) using a mixed methods approach. We hypothesized that intervention sites would show a greater improvement over time than control sites, in both quantitative and qualitative measures of safety. Quantitatively, our primary outcome was safety climate. Based on the functional construct of organizational climate (6), safety climate is the workers' perception of what is rewarded and supported at the worksite with regard to safety and its competing messages such as productivity (6, 7). Within the theoretical framework of this definition, we expected the B-SAFE program to improve safety climate as the program should increase communications and provides a reward for all workers when safety working conditions are achieved consistently on a site. In addition, safety climate may act as a proxy for injury outcomes based on its empirical associations of injury measures (7–11) and the theoretical safety performance framework of Neal and Griffin (12, 13). Qualitatively, we explored B-SAFE's effect on the themes of safety awareness, safety communication, and collaborative competition (themes identified as positively impacted by B-SAFE during our pilot) (5).

## Methods

### Study design and sample population

We conducted a cluster RCT on four pairs of commercial construction worksites. One pair was recruited from an owner and three pairs from general contractors in the greater Boston area. The clustering was completed at the general contractor/owner pair level as we assumed that the variability between sites of different general contractors/owners would be much larger than the variability of sites within a general contractor/owner. To be included in the study, sites had to be using the online data inspection management program Predictive Solutions (Industrial Scientific, Oakdale, PA, <http://www.predictivesolutions.com/solutions/SafetyNet/>) as standard practice prior to study initiation. To be eligible for inclusion, a site had to operate for >4 months from study initiation and have  $\geq 30$  workers at any one time (no maximum level of workers required). The sites within each pair were randomly assigned a treatment status of either control or intervention.

### Treatment conditions

The intervention worksites implemented the B-SAFE program for 4–6 months (table 1). The program's primary components were: (i) weekly worksite safety

inspections; (ii) weekly feedback and communication; and (iii) monthly recognition and reward.

The worksite safety inspections were conducted via site walkthroughs by a trained safety manager from either the general contractor or owner. The safety inspections provided weekly safety performance scores for the worksite and each subcontractor. Inspections were inclusive of all trades and tasks on-site and included both the safe (control measures) and unsafe (hazards) physical working conditions and practices. Although each site had a different inspector, all followed the same guidelines. The inspector entered all data into Predictive Solutions and denoted each observation by subcontractor. Once per week, investigators downloaded the inspection data and generated a weighted safety performance score (the percent of safe observations out of the total observations) for the overall site, and for the individual subcontractor companies (5, 14).

The weekly feedback and communication consisted of worksite posters and detailed reports distributed to each subcontractor on safety observations at the weekly foremen meetings. The research team distributed subcontractor-specific reports to the foremen that detailed all observations, both safe and unsafe, from the previous week. Large posters located in high visibility areas displayed a graph of the overall site safety performance score along with an adjacent list of the subcontractors' recent scores. The poster contained an inspection score goal that ranged from 94.8–96.3% depending on the site. This goal was determined in a previous analysis by Sparer and Dennerlein (14) in which various methods were evaluated to best determine thresholds in leading indicator-based safety inspection programs. The final threshold goal utilized was determined to be fair, consistent, attainable, and competitive. The goal was the median of monthly safety performance scores over the previous 12 months from sites of similar size and scope from either the site owner or general contractor's (based on how the pair was selected) inspection history (14).

The monthly recognition depended upon the overall site score for that given month. If the score exceeded the calculated goal, the whole site was recognized for their strong safety record with a catered lunch and participation in a raffle for either a one-month parking pass at a location near the worksite or a gas station gift certificate. If the score was below the goal, the research team conveyed this information to workers during foremen's meetings and other whole site gatherings (such as stretch-and-flex).

The control sites consisted of the contractors' standard safety programs along with a few posters with the B-SAFE logo only. Given the rigor of the data collection methods and high frequency of site visits required to do so, research team members were on both site types almost daily, leading to a strong presence at both.

**Table 1.** Description of study sites. [I=intervention; C=control; R=renovation; NC=new construction]

Pair	Group	Size (sq. ft.)	Project length (months)	Time of data collection	Scope of work	Workers (N)
1	I	20 600	8	Aug-Feb	R	79
	C	8500	4	March-July	R	46
2	I	200 000	48	May-Oct	R + NC	298
	C	123 000	13	July-Oct	NC	105
3	I	390 000	35	July-Dec	NC	181
	C	375 000	33	Jan-June	NC	125
4	I	485 000	13	Feb-June	NC	319
	C	19 000	10	July-Dec	R	136


### Intervention efficacy evaluation

We used a mixture of quantitative and qualitative methods to evaluate the efficacy of B-SAFE. We considered this study an efficacy evaluation as it was conducted by study investigators in an environment in which the intervention and control conditions were highly standardized between sites (15). Worker surveys were completed pre- and post-exposure to the treatment and served to quantitatively assess changes in the study's primary outcome of safety climate (figure 1). Due to limited time for survey data collection at the 10–15 minute coffee breaks, we used qualitative methods to assess all other constructs from figure 1 in a subset of workers.

### Quantitative data collection

We invited workers on all sites to complete a pre-exposure survey at one of two times. For workers already on-site at study initiation, we invited workers at a study kick off meeting. For workers who started after the study began, we invited them during new worker safety orientations held multiple times per week. These orientations were mandatory and led by the general contractor. After collecting all completed surveys at intervention sites, we gave a 5–10 minute oral presentation that described the B-SAFE program. At control sites, workers were simply told that B-SAFE was a study of worksite safety and researchers would be on-site regularly to collect surveys. Workers aged 18–65 who could read and write English were eligible for the survey. We collected and compared names from survey respondents to track workers moving between sites.

We invited workers still on-site to complete post-exposure surveys every 30 days following their pre-exposure survey. We used a mixture of text messages and communication with on-site foremen and management to determine if a worker was still on the study site for the monthly follow up survey (16).

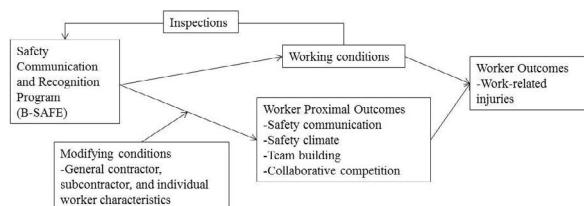

**Figure 1.** B-SAFE program conceptual model. The relationships in this model were generated based on a review of the scientific literature and based on observations noted during intervention development and pilot testing.

When we initiated the study in 2010, we made the decision to use a safety climate questionnaire developed by Dedobbeleer and Béland for use within the construction industry (17) given the importance of using an industry-specific scale to describe the safety climate (18) (Appendix A, [www.sjweh.fi/index.php?page=data-repository](http://www.sjweh.fi/index.php?page=data-repository)). The questions were indirectly based on Zohar's original 40-item and 8-factor scale (6, 17, 19). Gillen et al (20) used the Dedobbeleer and Béland items as a single factor to measure safety climate within a cohort of construction workers and found a positive association between safety climate and injury severity.

We modified the Dedobbeleer and Béland safety climate items in two ways. First, we modified the responses of the questions to reflect a Likert scale response. Second, based on inspection of the nine items, it became apparent that some items appeared to represent safety performance constructs such as safety training (items 6–7) and risk perception (items 8–9) rather than safety climate. Therefore, we performed an exploratory factor analysis using principal component analysis to assess the internal validity of the scale.

Factor analysis of the 9-item baseline data indicated that the items grouped together in two factors, a 7-item (scale items 1–7) and a 2-item (scale items 8–9). However, 2 of the 7 items (6–7) had factor loadings that were very weak (<0.50). We also had concerns about these items from a theoretical standpoint as they did not fit well with the definition of safety climate. Therefore, we did not include these items in our final safety climate scale. In addition, the Cronbach's alphas for the various scale configurations were 0.71, 0.74, and 0.75 for the 9-, 7-, and 5-item, respectively (alphas measured on a scale of 0–1) (21). Given the empirical and theoretical strength of the 5-item scale, we selected it scale for our data analysis.

As Dedobbeleer and Béland did not provide a scoring rubric, we developed one where each item was given a value between 0–10 and then summed for a total score. As a result each item was equally weighted. Higher scores indicated a positive safety climate. As the number of response options per item in the original scale varied from item to item (some having four responses and some

five), the point contribution reflected this. For example, if an item had five possible responses, the point contribution to the overall score would be 0, 2.5, 5, 7.5, or 10, whereas if only four response options were present, the contribution would be 0, 3.33, 6.67, or 10. If a minority of items were missing, the total score based on the completed answers was scaled to match the distribution of responses by the completed score.

The pre-exposure survey captured workers' age in years, gender, union membership status, specific trade, job title, tenure in the construction industry in years, and highest educational attainment. We combined the responses of the two race and ethnicity questions to indicate non-Hispanic (includes Black/African-American, Asian, and Native American), White or other (includes Hispanic and respondents who indicated "other").

Post exposure surveys included four intervention penetration questions: (i) Are you familiar with the worksite safety performance poster? Yes/no/not applicable; (ii) Are you aware of how your safety scores compare to other subcontractors? Yes/no/not applicable. (iii) Have you received feedback from foremen or other site personnel on your company's safety performance? Yes/no/not applicable. If yes, then (iv): How does your foreman share information with you? Responses included: during weekly toolbox talks, one-on-one with workers, other, and does not share information.

We also tabulated the cost and time of implementing the intervention. These costs include the recognition lunches (food and raffle items), posters, flyers, and hardhat stickers. We also recorded the time it took to generate the safety scores and provide site feedback.

### Quantitative data analysis

We first completed a bivariate analysis comparing the change in safety climate and worker demographics between control and intervention sites using Chi-squared tests of homogeneity for categorical variables and t-tests for continuous variables.

We then generated three mixed-effects regression models with the difference in pre- and post-safety climate score as the dependent variable, and treatment status (intervention or control) as the independent variable. For the first model, we included a worksite variable as the random effect in the model to account for the site-to-site variability in safety climate scores. For the second expanded model, we included a matched pair variable as a fixed effect based on our block randomization procedure. For the third model, we expanded the second model to include categorical variables for the month the worker started on-site and the total amount of time the worker spent on-site. This third model also included variables selected via stepwise variable selection technique from the worker demographic variables

that differed between the control and intervention sites in the bivariate analysis with p-value less than 0.2 (table 2). All data analyses were completed in SAS version 9.3 (SAS Institute Inc, Cary, NC, USA) and were considered significant at  $P<0.05$ .

### Qualitative data collection and analysis

At the end of quantitative data collection, we conducted one worker focus group per site, which occurred during an extended lunch break (half hour lunch break plus approximately 15 minutes of working time). A representative from the general contractor publicized the time and location of focus groups. Focus groups were open to all workers, with the first workers to arrive participating. Each focus group had six to eight participants, spanning the various trades and job titles. We followed a discussion guide that included questions on overall perceptions of site safety and related constructs (eg, management commitment to safety, teamwork, and safety awareness). Example questions included: Did you feel that management cared about safety? Did you feel that this was a safe site and why or why not? Have workplace safety conditions changed over the past few months here? Three research assistants coded and analyzed independently the recorded transcripts for thematic content using Atlas.ti (version 7).

## Results

### Quantitative data

**Study population and response rates.** Seven general contractors/owners were invited and four agreed to participate. These four provided ten sites, of which eight agreed to participate (figure 2, table 1). Those that declined cited tight work schedules and/or concerns from the property owner. In total, 1289 workers completed the pre-exposure baseline survey, with a response rate at intervention sites of 71% and control sites of 81%. The study sample included only those workers with both pre- and post-exposure (N=615). The response rate for the post-exposure follow up survey for eligible workers (those on-site at the time of follow up) was 88% at intervention sites and 86% at control sites. Of the 615 people, only 9 were on multiple worksites (indicating a contamination rate of approximately 1.5%).

The size of worksites and worker characteristics differed between the control and intervention sites despite randomization (table 2). All intervention sites were approximately twice the size of the control sites. Workers on intervention sites differed from those on control sites in terms of age, industry tenure, trade, and job title,

**Table 2.** Worker characteristics at control and intervention sites. [GED=general education development; SD=standard deviation]

Individual characteristics	Total		Control			Intervention			P-value	
	N	N	%	Mean	SD	N	%	Mean	SD	
Age (years)	603			43.1	10.1			39.5	10.8	<0.0001
Tenure (years)	582			19.8	10.1			16.7	10.4	0.0012
Baseline safety climate	604			43.3	6.4			42.0	7.0	0.040
Gender										0.72
Male	577	170	96.6			407	97.1			
Female	18	6	3.4			12	2.9			
Race/Ethnicity										0.16
White, non-Hispanic	499	156	88.6			343	80.5			
Other	103	20	11.4			83	19.5			
Union member										0.32
No	12	2	1.2			10	2.4			
Yes	571	170	98.8			401	97.6			
Education										0.52
Some high school/ high school or GED	220	62	36.1			158	38.9			
Vocational school/ associate's degree or more	358	110	64.0			248	61.1			
Job title										0.006
General Foreman/ Foreman	108	43	24.4			65	15.3			
J Journeyman	370	108	61.0			262	61.5			
Apprentice	109	20	11.3			89	20.9			
Other	16	6	3.4			10	2.4			
Trade										<0.0001
Finishing	103	22	8.5			81	6.6			
Mechanical	382	105	59.3			277	64.9			
Operators	10	2	1.1			8	1.9			
Laborer	43	15	12.4			28	19.0			
Ironworkers	47	30	17.0			17	4.0			
Other/unknown	19	3	1.7			6	3.8			
Month started on-site										0.009
1	131	39	22.0			92	21.5			
2	99	33	18.6			66	15.5			
3	118	45	25.4			73	17.1			
4	154	43	24.3			111	26.0			
5	88	17	9.6			71	16.6			
6	14	0	0.0			14	3.3			
Total months on-Site										0.05
1	209	75	42.4			134	31.4			
2	180	53	29.9			127	29.7			
3	121	27	15.3			94	22.0			
4	94	22	12.4			72	16.9			


as well as in terms of month started on-site and total time on-site (table 2). Baseline safety climate scores were also higher on control sites ( $P=0.040$ ).

**Safety climate.** The mean safety climate score of the intervention sites increased by 0.5 points (1%) between pre- and post-exposures, compared to the control sites, which decreased by 0.8 points (1.6%) (table 3). Three out of four intervention sites showed a positive increase. The sites that started off with the lowest mean pre-exposure scores (Pair 1-Intervention Site, and Pair 3-Intervention Site) had the largest increases [1.1 (2.2%) and 1.9 points (3.8%), respectively].

This effect increased and became significant in the mixed-effects regression models (table 4). The variance between the sites, while not statistically significant, was greatly reduced with the addition of the pair variable in Model 2. The third model included adjustments for

worker trade, job title, age, race/ethnicity, month the worker started on-site, and total number of months the worker was on-site. We ran similar regression analyses on the full nine item scale. The results were similar in direction, although slightly weaker in magnitude than the results of the five item scale.

**Intervention penetration and cost.** At intervention sites, workers were more likely to be aware of how their safety performance compared to other subcontractors and to receive/share feedback from their foremen/with their workers (table 5). The additional cost of running the B-SAFE program for five months was \$3055 plus one work hour per week per site, which represented the time for a staff member to compile the scores and the reports (table 6). This cost estimate assumes that weekly safety inspections are already part of the worksite health and safety program.

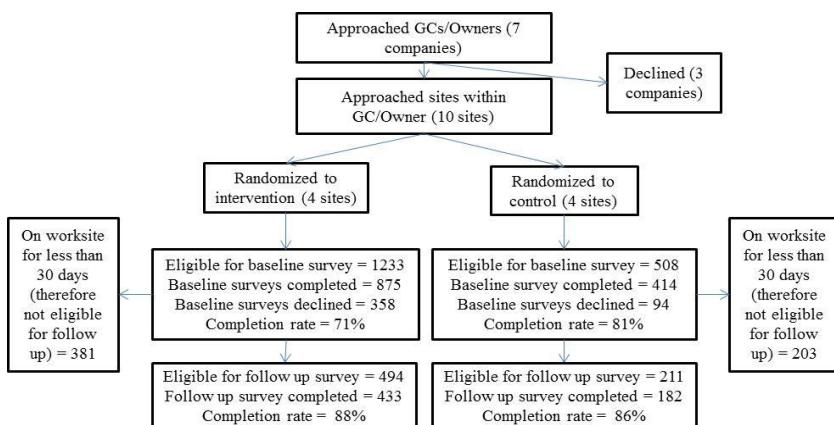

**Figure 2.** Overview of site and participant recruitment.

## Qualitative data

The individuals who participated in the focus groups (intervention: N=33; control: N=24) had a mean tenure in the construction industry of 17.5 years and were from trades including pipefitters, electricians, carpenter, iron-workers, and laborers.

At both control and intervention sites, workers noted common themes, including good communication, management commitment, teamwork, and safety awareness. Workers at intervention sites noted positive changes in these themes; whereas workers at control sites mentioned few differences: “No changes [during the B-SAFE study]—its safety first from day one.”

Safety communication appeared to improve at intervention sites: “[B-SAFE] helped safety-wise definitely, to be cautious of other people and what’s around you, and that’s huge. Communication is key between the trades. First couple of times you do it looks like you’re a jerk but now everyone sees the reason why and are looking out for everyone’s safety.”

Safety awareness and teambuilding were expressed more frequently and in a more positive light during focus groups at intervention sites compared to those at control sites. One worker at an intervention site noted: “With ladders, normally you’d just want to get it done, and you’d take the extra foot on the ladder, now guys are conscious to go get a higher ladder. You see the guys making the change. It makes you more aware. Now, you’re being more conscious of everything else.” A different worker at an intervention site noted: “The trades were working together with the B-SAFE program, and other trades were watching out for everyone else. Normally they would never do that, but now I see talking amongst the trades—this came from the program.”

Positive reinforcement of safe work and collaborative competition were unique themes identified at the intervention sites. Collaborative competition was defined as workers expressing interest in improving their

own contractor’s safety performance score in order to beat the other subcontractors on the worksite, as well as improving the whole site safety score. “No sub wanted to mess up and cost the other guys—who were trying hard—the lunch.” Positive reinforcement was noted by a foreman, “[It] felt good to finally get a piece of paper in a meeting to say I did something right.”

## Discussion

The goal of this study was to evaluate the efficacy of B-SAFE, a safety communication and recognition program, on a set of worksite safety measures. The results indicated that B-SAFE had a positive impact on these site safety measures, leading to an improvement in safety climate of approximately two points on the intervention compared to control sites. Qualitative data also indicated a higher occurrence of positive safety-related themes of teamwork and increased awareness at intervention sites when compared to control sites. These improved safety metrics may lead to reduced rates of work-related injury.

Our results were similar in magnitude to changes Zohar and Polacheck (22) observed in safety climate. Their supervisor communication intervention had an effect size of 0.15 on a 5-point scale, a 3.8% change, compared to the B-SAFE study effect size of 1.64 on a 50-point scale, a 3.28% change. The slightly smaller effect size of the B-SAFE study can also be attributed in part to the high variability of the construction environment, compared to the stable environment of manufacturing, and the added challenges faced of running and evaluating a program when the population of workers changes constantly (16).

Studies in other industries have focused on relationships between injury and safety climate (23), as well as associations between mediating or modifying factors on

**Table 3.** Summary of pre- and post-exposure mean safety climate scores (0–50 with increasing positive safety climate) across the eight study sites. [SD=standard deviation]

		N	Pre-exposure		Post-exposure		Change in means
			Mean	SD	Mean	SD	
1	Intervention	34	43.3	6.8	44.4	7.1	1.1
	Control	25	43.9	6.3	42.0	5.4	-1.9
2	Intervention	120	43.9	5.3	44.4	6.8	0.5
	Control	41	44.5	5.8	43.3	5.9	-1.2
3	Intervention	105	38.4	8.2	40.3	7.7	1.9
	Control	66	42.9	6.9	43.0	6.4	0.1
4	Intervention	168	42.7	6.4	42.1	6.4	-0.6
	Control	45	42.3	6.0	41.0	6.4	-1.3
Mean	Intervention	427	42.0	7.0	42.5	7.1	0.5
	Control	177	43.3	6.4	42.4	6.2	-0.8

**Table 4.** Results of Mixed Effects Regression Models [SE=Standard error].

	Intervention effect estimate	N	SE	P-value
Model 1 – Unadjusted <sup>a</sup>	1.54	604	0.80	0.06
Model 2 – Adjusted <sup>b</sup>	1.58	604	0.59	0.01
Model 3 – Adjusted <sup>c</sup>	1.64	600	0.63	0.01

<sup>a</sup> Dependent variable is the change in pre- and post- B-SAFE exposure safety climate score. Independent variable is worksite treatment status (control or intervention). Random effect is site.

<sup>b</sup> Same parameters as Model 1. Also adjusted for worksite pair.

<sup>c</sup> Same parameters as Model 2. Also adjusted for worker trade, title, age, race/ethnicity, month started on-site, total amount of time on-site.

the pathway of safety climate and injury such as safety behavior, employee safety control, and safety leadership (7, 24). Although our study was not powered to detect difference in injury and further research is needed to examine the true effect of B-SAFE on injury outcomes, the observed 1.6 effect size still might have practical significance. The approximate change represents close to a 16% increase in the available range of positive change (10 points out of 50). There are some limitations that should be acknowledged with regard to the use of the Dedobbeleer and Béland scale. As we have previously described (25), there are concerns regarding reference groups in the scale, as the referent category changes between the job itself, the worksite, and the company. These issues might result in increased variability in the safety climate measurement; however, this would impact both the intervention and control groups equally, thus resulting in an effect estimate biased towards the null. There are also concerns regarding some items which may reflect individual rather than shared perceptions of safety, however these dropped out after our factor analysis and were not included in our final 5-item scale.

Conducting a randomized trial of a safety intervention on highly dynamic construction sites proved to contain

many challenges, which place additional limitations on our conclusions. First, there were significant differences in the site populations between the control and intervention sites. The small number of sites allowed for the imperfect randomization. *A priori* and based on our understanding of the local construction industry, we believed that there would be more variability between sites of different general contractors/owners than within a general contractor/owner. We therefore aimed to find two sites within each general contractor/owner that were of similar size and trade make-up and block randomized within this pair. However, the reality of conducting research on active construction sites meant that we were limited to the sites that were available during our data collection period in order to have concurrent control and intervention sites. As a result, there was a substantial size and demographic makeup difference between the sites that were randomly assigned to either intervention or control status. To account for these differences, we therefore added site- and individual- level variables to our statistical modeling. Adding these variables increased the effect estimate and statistical significance. While there was some site-to-site variability in the mixed model, the matched pair design helped to refine the effect estimate.

Second, the workers on construction sites come and go frequently with about 50% remaining on-site >30 days (16). The data used in this analysis were collected from workers who were on-site for >30 days. The conclusions therefore may not be reflective of all workers and may exhibit a form of selection bias. The workers who are on-site >30 days are different in their distribution of trade, job title, race/ethnicity, and baseline musculoskeletal pain than workers who are on-site <30 days (16). The surveys analyzed in this study may not reflect a population representative of the true worksite composition, with those captured tending to be healthier (26). Within our sample, we addressed this issue of potential bias by controlling for time-varying parameters (total time on-site and month started) in our analysis. When we controlled for length of time on-site the effect estimate increased and standard error decreased, suggesting that the original effect estimate might be an underestimate.

Another limitation could be the movement of workers between study sites; however, contamination was very low (1.5%). It is possible that workers on whom we do not have data (either because they declined our baseline survey or did not provide contact information in the follow up survey to allow for follow up) moved between sites. However, any undocumented contamination would, if anything, likely bias our results towards the null.

Worker mobility also required that the pre-exposure safety climate score was determined on a worker's first day on the jobsite, where they may not have fully formed their safety climate perceptions and, as a result, lead to increased variability in the measurement. However,

**Table 5.** Penetration B-SAFE program components at intervention and control sites.

	Control		Intervention		P-value
	N	%	N	%	
Are you familiar with worksite safety performance poster?					
Yes	129	70.9	403	93.5	<0.0001
No	44	24.2	27	6.3	
N/A	9	4.9	1	0.2	
Are you aware of how your safety scores compare to other subcontractors?					
Yes	43	24.0	328	76.1	<0.0001
No	127	70.9	96	22.3	
N/A	9	5.0	7	1.6	
Have you received feedback (from foremen, other site personnel or shared feedback with workers) on your company's safety performance?					
Yes	102	58.0	319	74.5	<0.0001
No	66	37.5	99	23.1	
N/A	8	4.5	10	2.3	
How does your foremen share information with you (or how do you share information with your workers)?					
During weekly toolbox talks	95	84.8	290	88.1	<0.0001
One-on-one with workers	13	11.6	19	5.8	
Other (e.g. coffee/lunch breaks, monthly safety meetings)	2	1.8	7	2.1	
Does not share information	2	1.8	13	4.0	

this increased variability would equally affect both the intervention and control sites. If any, the bias on the results would be non-differential towards the null (27).

The conclusions are limited to commercial construction sites with pre-existing safety programs. The findings in this study indicate that B-SAFE can have a positive impact on site safety; however, it was tested on sites that were assumed to already have strong safety program in place based on the owner/general contractor. B-SAFE is not a standalone safety program; it was designed to be a low cost add-on to an existing health and safety program of high quality that includes a robust safety inspection program. The companies and sites included in this study had sophisticated systems of safety as indicated by their use of Predictive Solutions and the high safety climate scores. In addition, the sites were all medium to large commercial sites and heavily unionized.

Induced bias due to regression to the mean is another possible limitation. This occurs when extreme values tend to be followed by more typical values and is of particular concern when the sample is small and has not been randomly selected. To minimize this bias, we determined site-type randomly and within each site were able to collect data from a majority of respondents. While we cannot remove this potential bias completely, our methods have reduced the possibility of such induced bias.

In conclusion, B-SAFE led to many positive changes on the worksites, including an improvement in safety climate, awareness, teambuilding, and communica-

**Table 6.** Estimated cost <sup>a</sup> of running B-SAFE for five months.

Item	Cost per item (\$)	Number of items per site	Total (\$)
Banner	50.00	1	50
Posters	35.00	3	105
Stickers	1.50	100	150
Flyers	0.50	100	50
Lunches	10	225 (75 workers × 3 lunches)	2250
High-value item (gas card, parking pass)	150	3	450
Running of the B-SAFE program	Depends on site	20 hours (1 hr/week, in- cluding .5 hr to calculate scores and .5 hr to dis- tribute reports and post scores, over 5 months)	20 hours × employee hourly rate
Total			3055 + person-hours for running program

<sup>a</sup> The cost estimate relies on the following assumptions: (i) the site has a health and safety program that includes frequent safety inspections and entering data into the Predictive Solutions database; (ii) the person running the program is a trained health and safety manager; (iii) the intervention is run on a worksite for five months; (iv) the site surpasses the safety performance threshold three out of five months; (v) there are 75 workers on the site during recognition lunches.

tion. It was a simple, low cost intervention that the construction industry can use to improve safety climate on worksites. Simple programs that engage all workers through strong communication infrastructures may have a positive impact on overall worksite health and safety.

### Acknowledgements

The Center for Construction Research and Training (CPWR) supported this research under grant number U60OH009762. Additional support was provided by the National Institute of Arthritis and Musculoskeletal and Skin Diseases of the National Institutes of Health under award number T32AR055885 and the National Institute for Occupational Safety and Health (NIOSH) and the NIOSH/ERC at Harvard University grant (T42OH008416). The content is solely the responsibility of the authors and does not necessarily represent the official views of the CPWR, NIOSH, or NIH. The authors thank Kincaid Lowe, Mia Goldwasser, Kristen Ironside, Dana Baarsvik, and Andrea Sheldon from Northeastern University for help with data collection, Jeffrey Katz of Brigham and Woman's Hospital and Harvard Medical School for his invaluable help with the psychometrics, and all of the construction companies and workers in the Boston area that participated in the study.

## References

1. BLS. Census of Fatal Occupational Injuries (CFOI): 2013 Chart Package. In: Labor Do, editor; 2014.
2. Fairfax R. Employer Safety Incentive and Disincentive Policies and Practices. In: US Department of Labor OSaHA, editor; 2012.
3. Brown GD, Barab J. "Cooking the books"--behavior-based safety at the San Francisco Bay Bridge. *New Solut.* 2007;17(4):311–24. <http://dx.doi.org/10.2190/NS.17.4.g>.
4. Lipscomb HJ, Nolan J, Patterson D, Sticca V, Myers DJ. Safety, incentives, and the reporting of work-related injuries among union carpenters: "You're pretty much screwed if you get hurt at work". *Am J Ind Med.* 2013;56(4):389–99. <http://dx.doi.org/10.1002/ajim.22128>.
5. Sparer EH, Herrick RF, Dennerlein JT. Development of a Safety Communication and Recognition Program for Construction. *New Solut.* 2015;25(1):42–58. <http://dx.doi.org/10.1177/1048291115569025>.
6. Zohar D. Safety climate in industrial organizations: Theoretical and applied implications. *J Appl Psychol.* 1980;65(1):96–102. <http://dx.doi.org/10.1037/0021-9010.65.1.96>.
7. Clarke S. The relationship between safety climate and safety performance: a meta-analytic review. *J Occup Health Psycho.* 2006;11(4):315. <http://dx.doi.org/10.1037/1076-8998.11.4.315>.
8. Huang Y-H, Ho M, Smith GS, Chen PY. Safety climate and self-reported injury: Assessing the mediating role of employee safety control. *Accid Anal Prev.* 2006;38(3):425–33. <http://dx.doi.org/10.1016/j.aap.2005.07.002>.
9. Probst TM, Brubaker TL, Barsotti A. Organizational injury rate underreporting: The moderating effect of organizational safety climate. *J Appl Psychol.* 2008;93(5):1147–54. <http://dx.doi.org/10.1037/0021-9010.93.5.1147>.
10. Beus JM, Payne SC, Bergman ME, Arthur Jr W. Safety climate and injuries: an examination of theoretical and empirical relationships. *J Appl Psychol.* 2010;95(4):713. <http://dx.doi.org/10.1037/a0019164>.
11. Christian MS, Bradley JC, Wallace JC, Burke MJ. Workplace safety: a meta-analysis of the roles of person and situation factors. *J Appl Psychol.* 2009;94(5):1103. <http://dx.doi.org/10.1037/a0016172>.
12. Neal A, Griffin MA. A study of the lagged relationships among safety climate, safety motivation, safety behavior, and accidents at the individual and group levels. *Journal of Applied Psychology* 2006;91(4):946–53. <http://dx.doi.org/10.1037/0021-9010.91.4.946>.
13. Neal A, Griffin MA, Hart PM. The impact of organizational climate on safety climate and individual behavior. *Saf Sci* 2000;34(1–3):99–109. [http://dx.doi.org/10.1016/S0925-7535\(00\)0008-4](http://dx.doi.org/10.1016/S0925-7535(00)0008-4).
14. Sparer EH, Dennerlein JT. Determining safety inspection thresholds for employee incentives programs on construction sites. *Saf Sci.* 2013;51(1):77–84. <http://dx.doi.org/10.1016/j.ssci.2012.06.009>.
15. Singal AG, Higgins PDR, Waljee AK. A primer on effectiveness and efficacy trials. *Clin Transl Gastroenterol.* 2014;5(1):e45. <http://dx.doi.org/10.1038/ctg.2013.13>.
16. Sparer EH, Okechukwu CA, Manjourides J, Herrick RF, Katz JN, Dennerlein JT. Length of time spent working on a commercial construction site and the associations with worker characteristics. *Am J Ind Med.* 2015;58(9):964–73. <http://dx.doi.org/10.1002/ajim.22461>.
17. Dedobbeleer N, Béland F. A safety climate measure for construction sites. *J Safety Res.* 1991;22(2):97–103. [http://dx.doi.org/10.1016/0022-4375\(91\)90017-P](http://dx.doi.org/10.1016/0022-4375(91)90017-P).
18. Zohar D. Thirty years of safety climate research: Reflections and future directions. *Accid Anal Prev.* 2010;42(5):1517–22. <http://dx.doi.org/10.1016/j.aap.2009.12.019>.
19. Brown R, Holmes H. The use of a factor-analytic procedure for assessing the validity of an employee safety climate model. *Accid Anal Prev.* 1986;18(6):455–70. [http://dx.doi.org/10.1016/0001-4575\(86\)90019-9](http://dx.doi.org/10.1016/0001-4575(86)90019-9).
20. Gillen M, Baltz D, Gassel M, Kirsch L, Vaccaro D. Perceived safety climate, job demands, and coworker support among union and nonunion injured construction workers. *J Safety Res.* 2002;33(1):33–51. [http://dx.doi.org/10.1016/S0022-4375\(02\)00002-6](http://dx.doi.org/10.1016/S0022-4375(02)00002-6).
21. Cronbach LJ. Coefficient alpha and the internal structure of tests. *Psychometrika* 1951;16(3):297–334. <http://dx.doi.org/10.1007/BF02310555>.
22. Zohar D, Polacheck T. Discourse-based intervention for modifying supervisory communication as leverage for safety climate and performance improvement: A randomized field study. *J Appl Psychol.* 2014;99(1):113–24. <http://dx.doi.org/10.1037/a0034096>.
23. Johnson SE. The predictive validity of safety climate. *J Safety Res.* 2007;38(5):511–21. <http://dx.doi.org/10.1016/j.jsr.2007.07.001>.
24. Swedler DI, Verma SK, Huang Y-H, Lombardi DA, Chang W-R, Brennan M, et al. A structural equation modelling approach examining the pathways between safety climate, behaviour performance and workplace slipping. *Occup Environ Med.* 2015;72(7):476–81. <http://dx.doi.org/10.1136/oemed-2014-102496>.
25. Sparer EH, Murphy LA, Taylor KM, Dennerlein JT. Correlation between safety climate and contractor safety assessment programs in construction. *Am J of Ind Med.* 2013;56(12):1463–72. <http://dx.doi.org/10.1002/ajim.22241>.
26. Kafadar K, Prorok PC. Effect of length biased sampling of unobserved sojourn times on the survival distribution when disease is screen detected. *Stat Med.* 2009;28(16):2116–46. <http://dx.doi.org/10.1002/sim.3601>.
27. Pearce N, Checkoway H, Kriebel D. Bias in occupational epidemiology studies. *Occup Environ Med.* 2007;64(8):562–8. <http://dx.doi.org/10.1136/oem.2006.026690>.

Received for publication: 17 June 2015