

6

Ground penetrating radar for highwall guidance

OBJECTIVE

To provide a safe, practical, cost-effective method for measuring coal rib thickness during highwall mining.

Background

U.S. highwall operators have been seeking a method to maintain an optimum coal rib thickness throughout the entire depth of the entry, particularly in mines where the depth of penetration can be up to 400 m. In Appalachian coal mines, the typical coal rib thickness is 1 to 2 m, depending on the mechanical properties of the particular coal seam being mined. If the rib becomes too thin, the hazard of ground fall increases and with it the resulting risk of burying the mining equipment. Freeing a buried machine is an expensive process, places workers at risk, and produces no coal. Conversely, if the rib becomes too thick, the excess coal left behind is permanently unrecoverable and makes the rib thin for the next hole. Although the current typical alignment procedures utilize precision surveys, geological and mechanical forces during mining produce uncertainties in position nearly as large as the rib thickness itself at depths of 300 to 400 m despite the accuracy of the initial alignment.

Approach

The National Institute for Occupational Safety and Health (NIOSH), Pittsburgh Research Center, is evaluating a new method wherein a ground penetrating radar (GPR) is mounted on the mining machine to measure the rib thickness to the adjacent hole as cutting progresses. The advantage of GPR is that it uses electromagnetic pulses to measure the coal rib thickness directly. The GPR works best in clean coal seams; coal seams with significant partings or dirt bands tend to disrupt the radar signal so that the radar echo from the coal-air boundary is too weak or indistinct to be usable.

The success of a GPR system at a given location primarily depends on the electrical conductivity and dielectric constant of the geological formations. The electrical conductivity of coal is generally quite low (e.g., 10^{-5} S/m), which allows the radar signals to readily propagate through the coal. The dielectric constant of coal is typically 4-5; in contrast, air has a dielectric constant of 1. Consequently, there is a very distinct interface at coal/air (or air/coal) boundaries. The side of a highwall rib is fairly planar, is perpendicular to the direction of the radar, and thereby becomes a relatively easy target for the GPR. It should be noted that coal is an anisotropic (nonuniform) material, which requires that the GPR antenna be optimally oriented in such a way for maximum transmit and receive signals. This is best done by slowly rotating the antenna through a 90° arc about the transmitting direction and noting the angle that maximizes the radar signal.

How it works

The basic system consists of a radar control unit and an antenna, a PC to process the data, a Mine Safety and Health Administration-approved barrier box for intrinsic safety, and a remotecontrolled hydraulic- or electrical-powered arm attached to a highwall miner (figure 1). The antenna needs to be housed in a metal box for protection during mining operations. The remote controlled arm will keep the antenna retracted until coal rib thickness measurements are needed, at which time the operator would activate the arm to press the antenna "gently" against the coal rib to reduce the air gap between the antenna and the coal. The ability of the GPR to penetrate coal depends on the frequency of the radar, which must be selected accordingly.

For highwall applications requiring a rib thickness on the order of 1 to 3 m, a 400- or 500MHz antenna would probably be the most suitable. A 900-MHz antenna would be recommended for thinner coal ribs between 0.5 and 1.5 m. Figure 2 is a schematic of a typical highwall mining scenario using this radar system to measure coal rib thickness.

Project personnel have developed in-house software that runs on a laptop PC, which simplifies the normally cumbersome interpretation of the radar data. The PC reads and analyzes the received signals in real time, then provides the machine operator with a number corresponding to the rib thickness, as well as a tri-color display (green = "OK", amber = "caution", red = "danger") of the computed rib thickness.

Results

This GPR system was taken to a highwall mining site in Kentucky to evaluate the feasibility of using GPR to measure coal rib thickness and to obtain information regarding the depth of penetration and the effect of airgap on the GPR response. A 500-MHz antenna was used and found to be capable of measuring coal rib thickness from 0.9 m to more than 3 m. The best results were obtained with the antenna being no more than 5 cm from the coal surface. The antenna was positioned near the top of the coal seam because the cleanest coal was located there.

The operator prepared two highwall entries, each approximately 15 m long, 3.5 m wide, and 1 m high. The first entry was driven straight into the highwall. The second entry was driven in about 3 m from the first and was deliberately angled in such a way to come to within 0.9 m of the end of the first entry. Several tests were then run by moving

the antenna continuously from the entrance to the end of the entry and then back to the entrance, with each test having a different airgap (0 cm, 2 cm, and 4 cm). In all cases, the radar was capable of “seeing through” the coal rib at thicknesses ranging from 0.9 m to more than 3 m; however, the best response was when the antenna was physically touching the rib (0 cm - no airgap).

Patent status

A patent of this total system has been granted (U.S. patent No. 5,500,649, “Method and Apparatus for Monitoring the Thickness of a Coal Rib During Rib Formation”); it is available for field testing and/or licensing.

For more information

To obtain a free copy of a technical paper on this topic or for additional information, contact Gary L. Mowrey, Ph.D., National Institute for Occupational Safety and Health (NIOSH), Pittsburgh Research Center, Cochrans Mill Rd., P.O. Box 18070, Pittsburgh, PA 15236-0070, phone (412) 892-6594, fax (412) 892-6764, e-mail: gdm6@cdc.gov

Mention of any company name or product does not constitute endorsement by the National Institute for Occupational Safety and Health.

To receive additional information about mining issues or other occupational safety and health problems, call 1-80035-NIOSH (1-800-356-4674), or visit the NIOSH Home Page on the World Wide Web at <http://www.cdc.gov/niosh/homepage.html>

As of October 1996, the safety and health research functions of the former U.S. Bureau of Mines are located in the National Institute for Occupational Safety and Health (NIOSH).

*Reprinted from the July 1997 issue of Technology News—No. 462.
U.S. Department of Health and Human Services, Public Health Service
Centers for Disease Control and Prevention,
National Institute for Occupational Safety and Health*

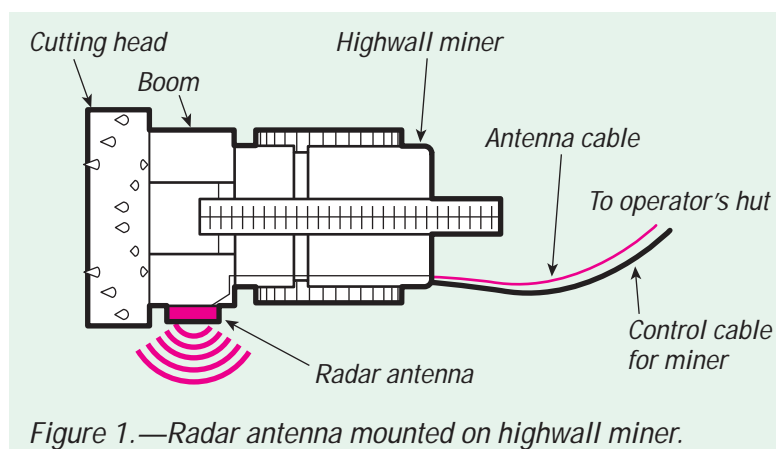


Figure 1.—Radar antenna mounted on highwall miner.

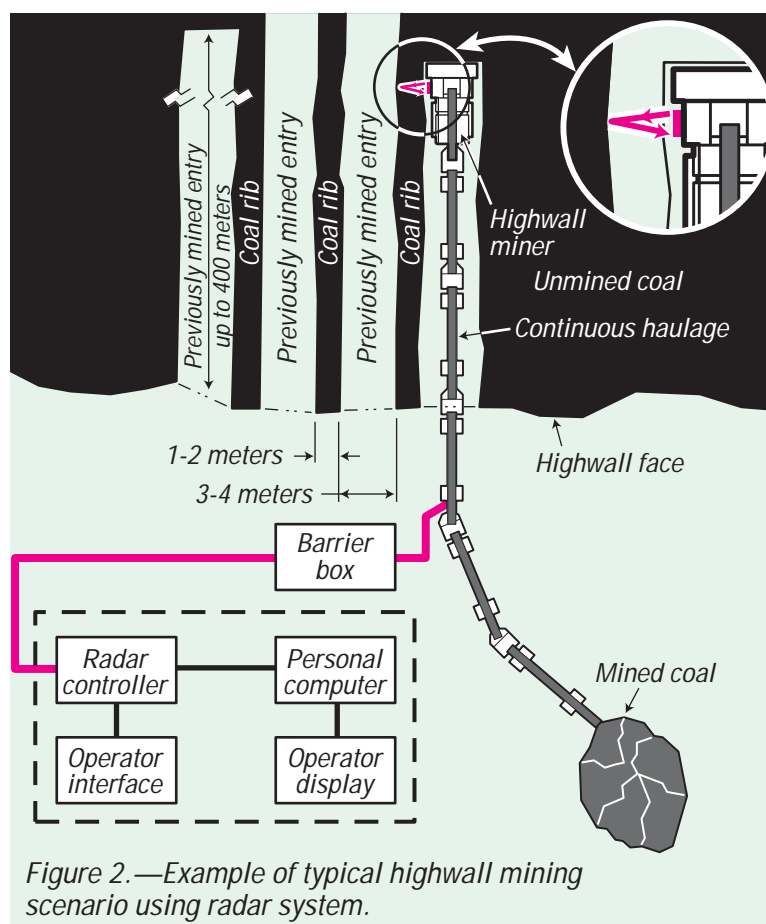


Figure 2.—Example of typical highwall mining scenario using radar system.


CORRECTION—

Four short articles in the September Bulletin were erroneously attributed to the Mine Regulation Reporter when in fact the original source was the Mine Safety and Health News. We regret the error.
—The Editor.

The Holmes Safety Association

BULLETIN

October 1998

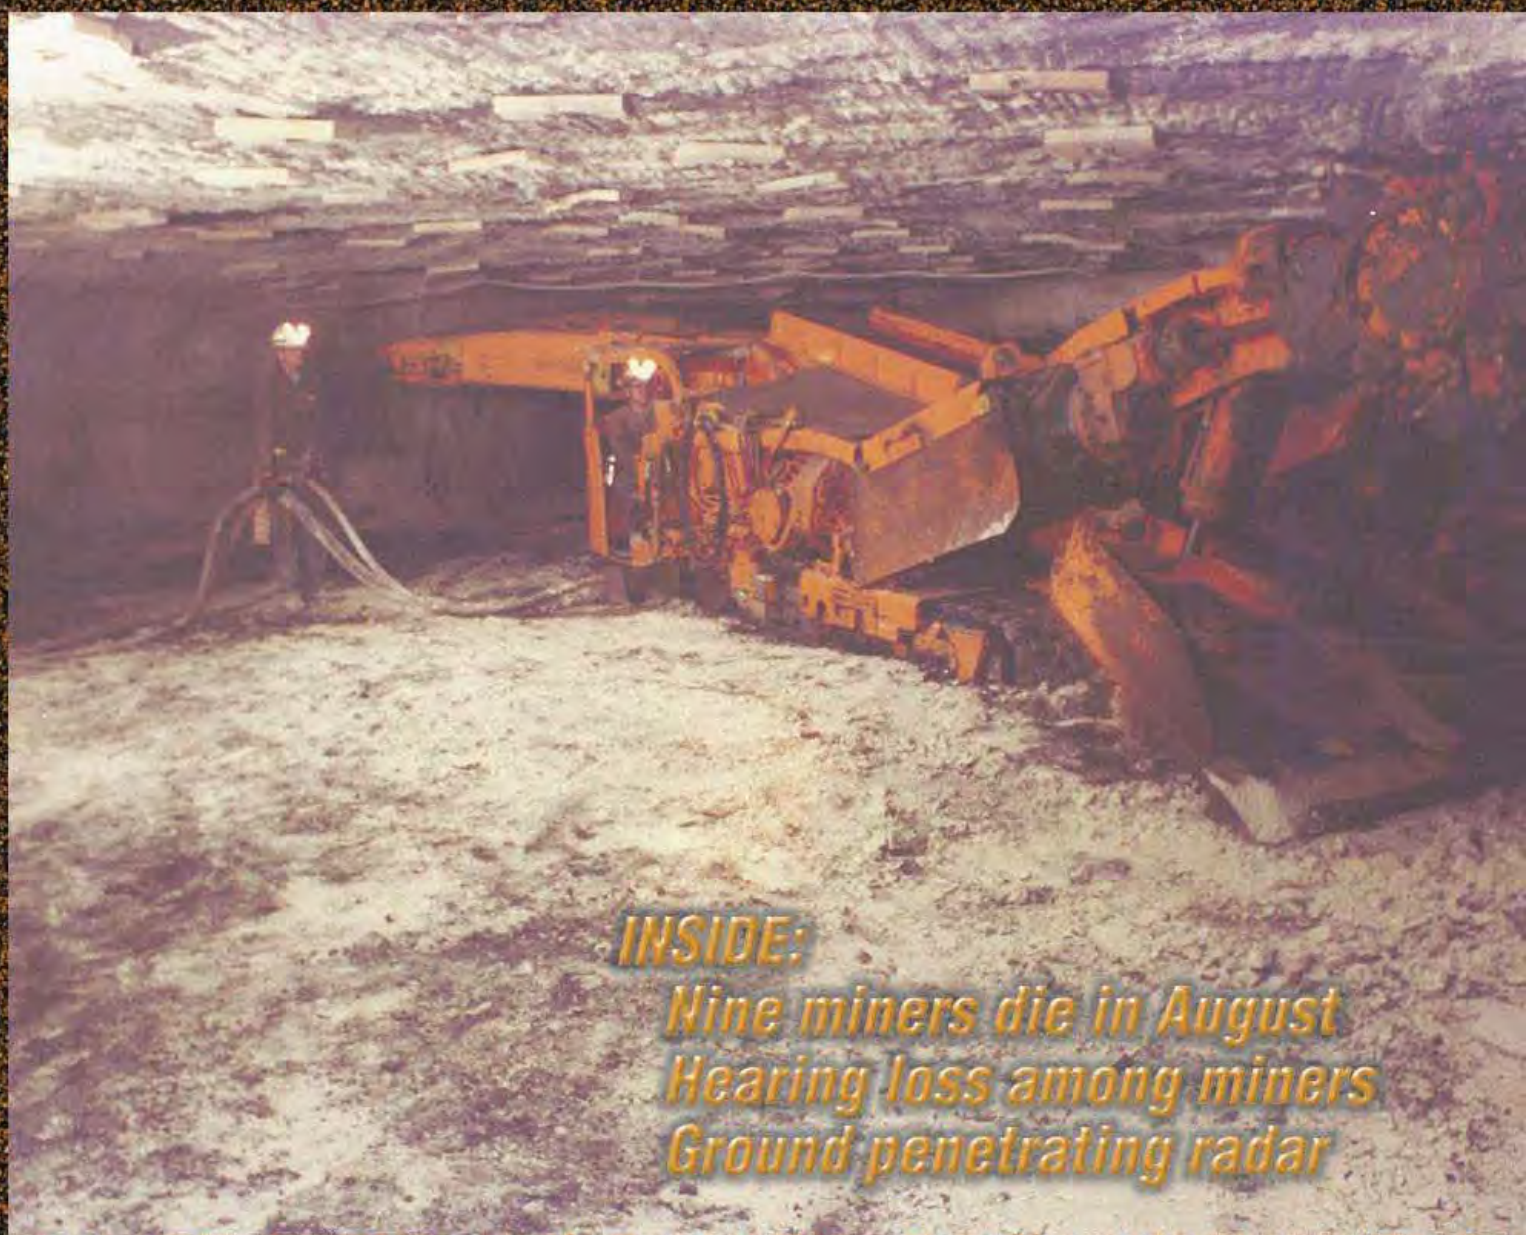

INSIDE:

*Nine miners die in August
Hearing loss among miners
Ground penetrating radar*



contents:

Hearing loss among miners and measures to protect hearing.....	3
Miners memorial to be dedicated at Twin Falls, WV	5
Ground penetrating radar for highwall guidance	6
Roof fall fatality rate alarms MSHA	8
Record production levels expected through 2000	8
Nine miners killed in August; six are metal/nonmetal miners	9
MSHA sets up dust fraud hotline	10
MSHA sets deadline on breathing devices for underground coal miners.....	10
Biodiesel use in underground metal and nonmetal mines.....	11
Warning issued to roof bolters. helpers on rotating drill steels	15
Warning issued about Moog remote controller	15
Three girls die in clay pit	16
Free, confidential chest X-rays offered to Kentucky coal miners	16
New Internet site covers natural resource news	17
Refurbished methane detectors wanted for Ukrainian mines	17
Mining operations recognized for outstanding safety records	18
FMC Corp. takes first place in national mine rescue contest	19
In the depths of a coal mine	20

The **Holmes Safety Association Bulletin** contains safety articles on a variety of subjects: fatal accident abstracts, studies, posters, and other health- and safety-related topics. This information is provided free of charge and is designed to assist in presentations to groups of mine and plant workers during on-the-job safety meetings. For more information visit the *MSHA Home Page* at www.msha.gov

PLEASE NOTE: The views and conclusions expressed in Bulletin articles are those of the authors and should not be interpreted as representing official policy or, in the case of a product, represent endorsement by the Mine Safety and Health Administration.

COVER: This month's cover is also from the editor's collection of "old and older" photos, vintage 1970-1984, and indicates why we continually ask for submissions from our readers. If you have a potential cover photo, please send an 8" x 10" print to the editor, Fred Bigio, MSHA, 4015 Wilson Blvd., Arlington, VA 22203-1984

**KEEP US IN CIRCULATION
PASS US ALONG**