

COMFORT EVALUATION FOR MINE SHUTTLE CAR SEAT DESIGNS

Alan Mayton¹, Christopher Jobes¹, N. Kumar Kittusamy², Farid Amirouche³

¹NIOSH, Pittsburgh Research Laboratory, Pittsburgh, Pennsylvania, U.S.A.

²NIOSH, Spokane Research Laboratory, Spokane, Washington, U.S.A.

³Vehicle Technology Laboratory, University of Illinois at Chicago, Illinois, U.S.A.

Introduction

Industrial equipment exposes individuals to whole-body vibration (WBV) and mechanical shock. This exposure can negatively impact their health, safety, comfort, and working efficiency and performance. Accordingly, proper seat design is an important consideration in reducing the adverse effects of WBV exposure to vehicle operators. Since the human body is sensitive to low frequency WBV, ride quality is a basic and important element of good seat design. When designing a suitable seat, it is essential to understand vibration exposure environment of workers and how well they can tolerate this environment [1]. This is particularly true in the mining industry.

Mayton et al. [2] reported on a low-coal shuttle car seat design that underwent limited, yet successful underground mine trials. Building on this work, a follow-up study compared NIOSH and existing seat designs on low- and mid-coal seam shuttle cars. The NIOSH seat designs included viscoelastic foam, which has properties similar to those found in a mechanical spring/damper suspension system. The seats also included an adjustable lumbar support and a fore-aft seat adjustment. The NIOSH seat designs contrast with the existing seat design, which have little or no lumbar support and include inexpensive foam padding of the type commonly used in furniture.

This paper will focus on the seat designs for the mid-coal seam shuttle car and compare subjective comfort data collected from five vehicle operators with ISO 2631 – based reduced comfort boundary (RCB) analysis of recorded vibration levels.

Methods

Experimental data were collected using three different tools: triaxial accelerometers, pre-amplifiers, and filters connected to a data recorder; a visual analog scale (VAS); and a short questionnaire.

Researchers recorded quantitative or objective vehicle vibration data to determine the input and output acceleration at the operator cab floor and operator seat interface. Qualitative or subjective data, collected with the VAS, allowed researchers to obtain the operators' immediate impressions of shock, vibration, and discomfort levels for the vehicle ride on each of the seat designs. Each shuttle car operator made six round trips with the vehicle each seat. The shuttle car operator marked the VAS on the first, third, and sixth round trip of the trials for each seat. A round trip consisted of traveling to the coal face with *no load* and returning to the load discharge location with a *full load* of coal.

Results

Total overall average ratings for the five vehicle operators of the mid-coal seam shuttle car, showed that operators sensed from 45 to 87% less discomfort with NIOSH seat designs compared to the existing seat design. Using a 95% CI, researchers computed a strong positive correlation for discomfort.

Figure 1 illustrates the RCB analysis method for one of two NIOSH seat designs.

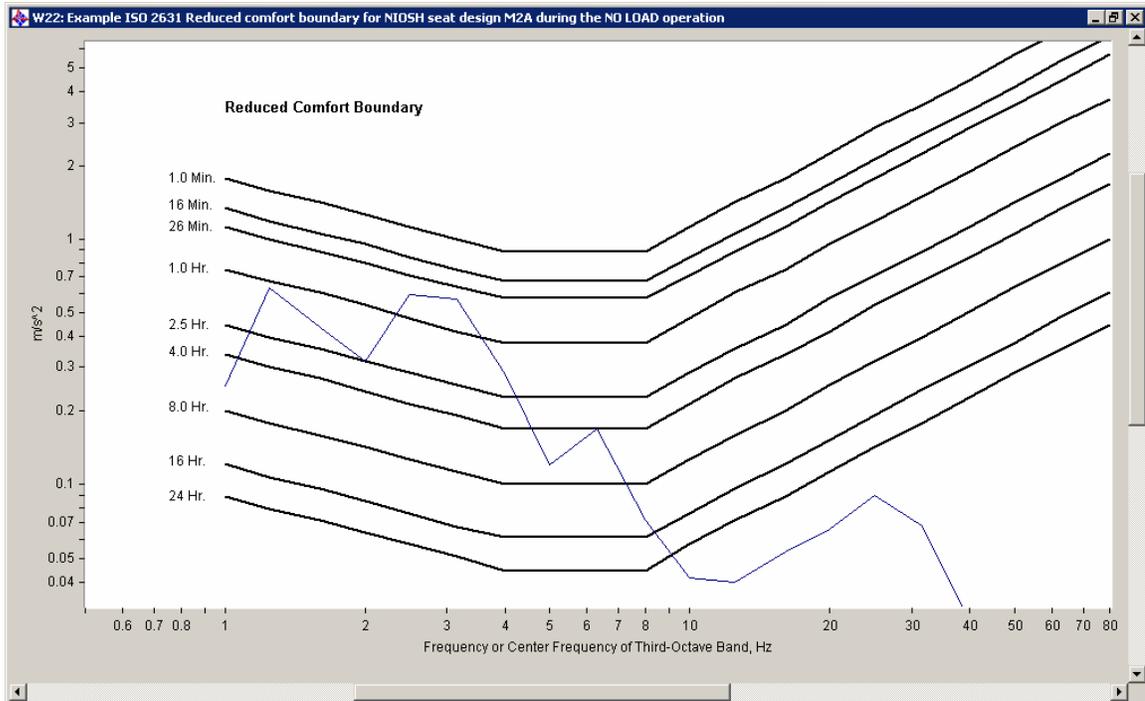


Figure 1. ISO 2631 RCB analysis for NIOSH seat design during *no load* operation.

Discussion

The RCB analysis during *no-load* operation showed that NIOSH seat designs, compared to the existing seat design, generally provided an increase in allowable exposure time for the vehicle operator, in the 4 to 8 Hz range. During *full-load* operation, the RCB analysis showed little difference in allowable exposure time for either the NIOSH or the existing seat designs. The natural frequency of the vehicle decreases for *full-load* operation as shown by the equation, $\omega = \sqrt{k/m}$ where, ω is the natural frequency, k is the spring constant, and m is the mass. Foam- or air-filled tires provide primary damping or attenuation of jars/jolts when the vehicle mass is increased with the *full load* of coal. Seat performance in attenuating of jars/jolts is thus secondary. The RCB acceleration-based analysis appears inadequate for correlating operator perceptions of discomfort. Vehicle operators' perceptions of discomfort are based more on the energy they sense transmitted to their bodies through the seat from the floor of the vehicle. So, the use of the absorbed power analysis reported by Mayton et al. [3], on the other hand, may provide a better means of correlating operator perceptions of vibration energy rather than the acceleration levels of the ISO 2631 RCB method.

References

1. Amirouche F., Xu P., and E. Alexa (1997). Evaluation of dynamic seat comfort and driver's fatigue. SAE 971573, 12 pp.
2. Mayton A., Merkel R., and S. Gallagher (1999). Improved seat reduces jarring/jolting for operators of low-coal shuttle cars. *Min. Eng.* vol. 51, no.12, pp. 52-56.
3. Mayton A., Amirouche F., and C. Jobes (2005). Comparison of seat designs for underground haulage vehicles using the absorbed power and ISO 2631-1 (1985)-based ACGIH threshold limits methods. *Int. J. Heavy Vehicle Systems*, vol. 12, no.3, pp. 225-238.

Proceedings of the
First American Conference on Human Vibration

June 5-7, 2006

Waterfront Place Hotel
Morgantown, West Virginia, U.S.A.

Ren Dong, Ph.D.
Kristine Krajnak, Ph.D.
Oliver Wirth, Ph.D.
John Wu, Ph.D.

Engineering and Control Technology Branch
Health Effects Laboratory Division
Morgantown, West Virginia, U.S.A.

Department of Health and Human Services
Centers for Disease Control and Prevention
National Institute for Occupational Safety and Health

Disclaimer

Mention of any company or product does not constitute endorsement by NIOSH. In addition, citations to Web sites external to NIOSH do not constitute NIOSH endorsement of the sponsoring organizations or their programs or products. Furthermore, NIOSH is not responsible for the content of these Web sites. The findings and conclusions in this report have not been formally disseminated by the National Institute for Occupational Safety and Health and should not be construed to represent any agency determination or policy.

This document is in the public domain and may be freely copied or reprinted.

ORDERING INFORMATION

To receive documents or other information about occupational safety and health topics, contact NIOSH at

NIOSH – Publications Dissemination
4676 Columbia Parkway
Cincinnati, OH 45226-1998

Telephone: 1-800-35-NIOSH (1-800-356-4674)
Fax: 513-533-8573
E-mail: pubstaft@cdc.gov

Or visit the NIOSH Web site at www.cdc.gov/niosh

DHHS (NIOSH) Publication No. 2006-140
June, 2006