

PERFORMANCE OF MANPACK ELECTROMAGNETIC LOCATION EQUIPMENT IN TRAPPED MINER LOCATION TESTS

by

A. J. Farstad

Westinghouse Georesearch Laboratory

8401 Baseline Road

Boulder, Colorado 80303

1.0 Introduction

The use of radio signals for underground communications was considered as early as the mid-1920's [1] - [4] . However, early experiments did not produce promising results with the type of equipment that was available then [5] . With advancements in solid state technology many of the schemes considered impractical in the early days suddenly became practical.

The properties of electromagnetic wave behavior in conducting media have been intensively studied by Wait [6] and others and can be utilized not only in communication with trapped miners, but also as a means of locating their position. This report deals with the development of portable electromagnetic equipment, powered by the miner's conventional lamp battery, which can be used to alert surface rescue personnel of the trapped miner's location. The Westinghouse Georesearch Laboratory (WGL) under BUMINES sponsorship initially approached the trapped miner location problem using seismic techniques. It was learned from this effort that two serious shortcomings of seismic techniques are (1) the extremely weak signals available on the surface from miner generated hammer blows, requiring long processing times at the surface receiver, and (2) the relatively slow procedure of deploying geophone arrays to sense the seismic uplink signals. By contrast, the electromagnetic techniques have proven much more practical from a deployment time standpoint and in most cases have also proven to be more accurate in determining location. Furthermore, these techniques have been successfully tested using a receiver in a helicopter for reconnaissance purposes. However, before any electromagnetic location technique can become fully operational, the miners themselves must be equipped with emergency transmitters to be carried with them on each work shift. Consequently, much emphasis has been placed on the development of extremely lightweight transmitting equipment. The performance of some of the electromagnetic location equipment developed by Westinghouse will be described in the following sections.

2.0 Basic Concepts

Theoretical concepts for locating magnetic dipoles in the earth have been treated by Wait [7] and Olsen [8] . A generalized curve for the attenuation of magnetic fields in a conducting half-space is derived from

Wait's work [7] and is shown in Figure 1. This curve applies only to fields directly above or directly beneath a transmitting source. Experimental verification of the validity of the theory is shown in Figure 2 which compares actual field measurements obtained over the Imperial Mine near Boulder, Colorado with the theoretical curve based on Wait's theory. The value of conductivity used in determining the theoretical curve was obtained from a dipole-dipole conductivity sounding taken over the Imperial Mine.

While the vertical magnetic field over vertical magnetic dipole source reaches a maximum directly over the source, the corresponding horizontal magnetic field experiences a null as shown by the example in Figure 3. This curve was obtained at the Rainbow No. 7 Mine in Rock Springs, Wyoming and depicts close agreement between the measured and calculated field profiles for both the vertical and horizontal fields. This was a relatively shallow (136 feet) mine, and the resulting signal-to-noise ratios at the surface were, in most cases, greater than 40 dB. However, the preliminary equipment used to obtain this data was not sufficient to obtain usable location data at the deeper mines of 500 feet and greater. Consequently, Westinghouse Georesearch Laboratory, under BuMines sponsorship, embarked on a development program aimed at producing portable equipment which would be operable at mine depths as great as 1500 feet. Since geometric spreading accounts for an (inverse distance)³ roll-off of field strength and increased losses in the earth at greater depths could account for up to 40 dB additional attenuation, we were faced with the problem of dealing with signal strengths as much as 100 dB down from those observed in the shallow mine tests. The equipment development and the results of the deep mine field tests are described in the following sections.

3.0 Description of Equipment

3.1 Operating Frequency

It is well known that low frequencies penetrate conductive material better than high frequencies. However, there are also other factors to consider in choosing the best frequency for an uplink electromagnetic location system, among which are (1) natural and man-made background noise, (2) availability of circuit components, (3) suitability of circuit miniaturization, and (4) permissibility restrictions in coal mines. Figure 4 shows a family of curves of expected field strength parametric in mine depth and superimposed on expected atmospheric noise levels for different seasons of the year. Based on signal-to-noise ratio alone, the optimum frequency for a 1500 foot (457 meter) mine would be on the order of 350 Hz. However, in most mining districts, there are strong harmonic interference fields from power lines which make frequencies this low difficult to use in a practical system. Consequently, to avoid the power line interference, our choice of frequencies was considerably higher, covering the band from 900 Hz to 2900 Hz.

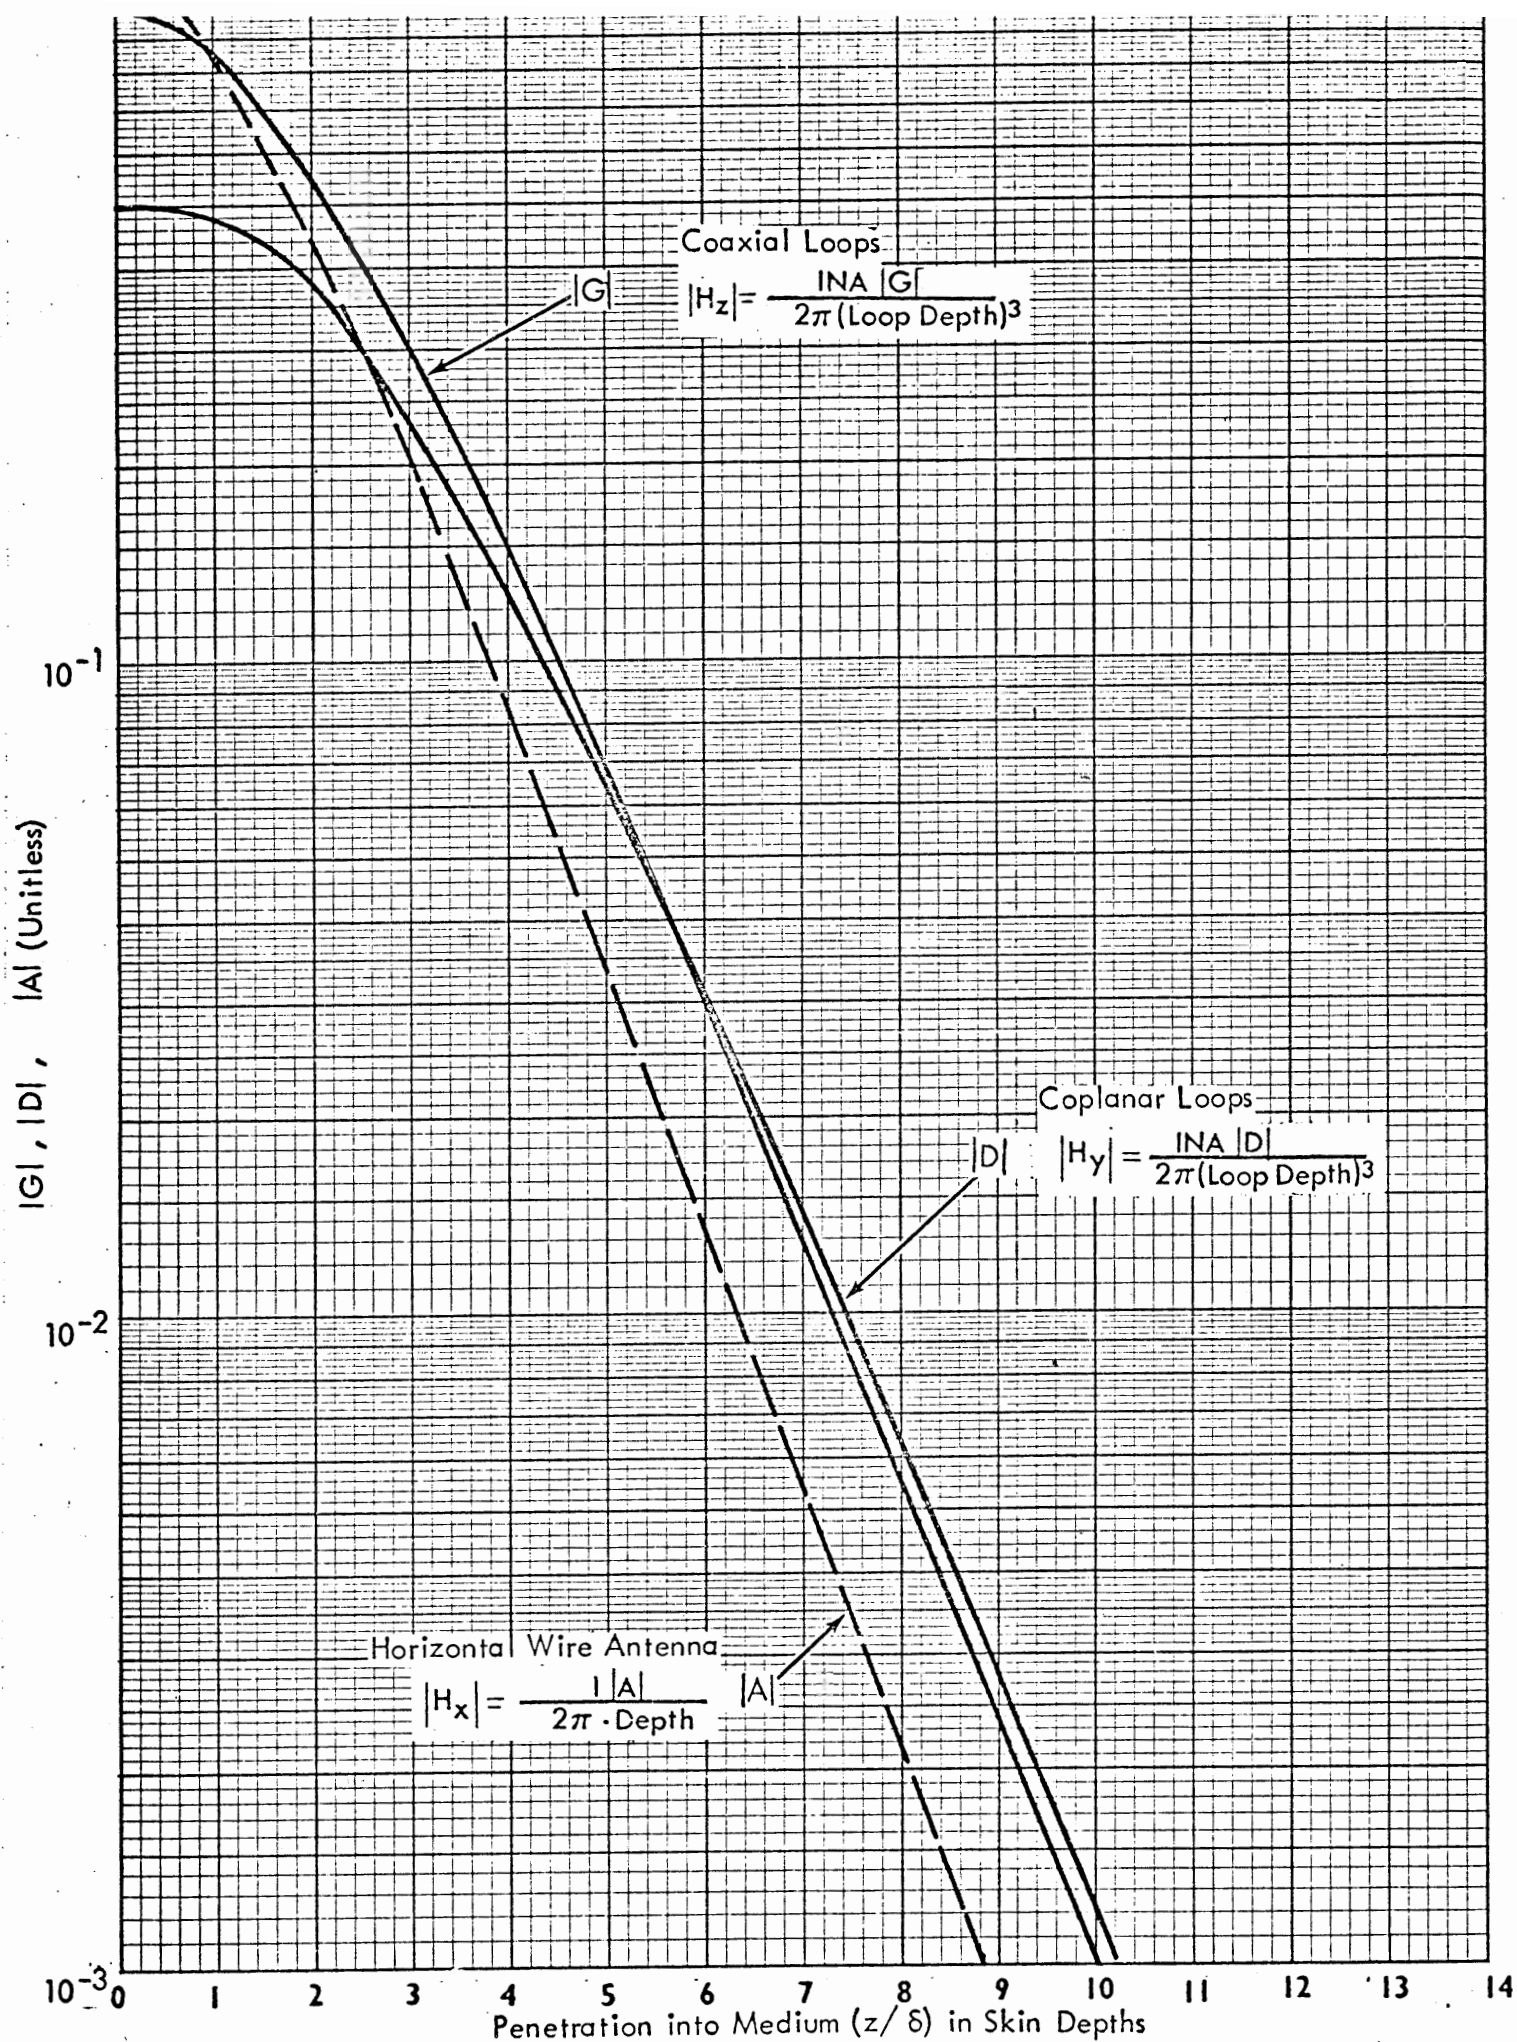


Figure 1. Loop Antenna and Horizontal Coupling Relationships

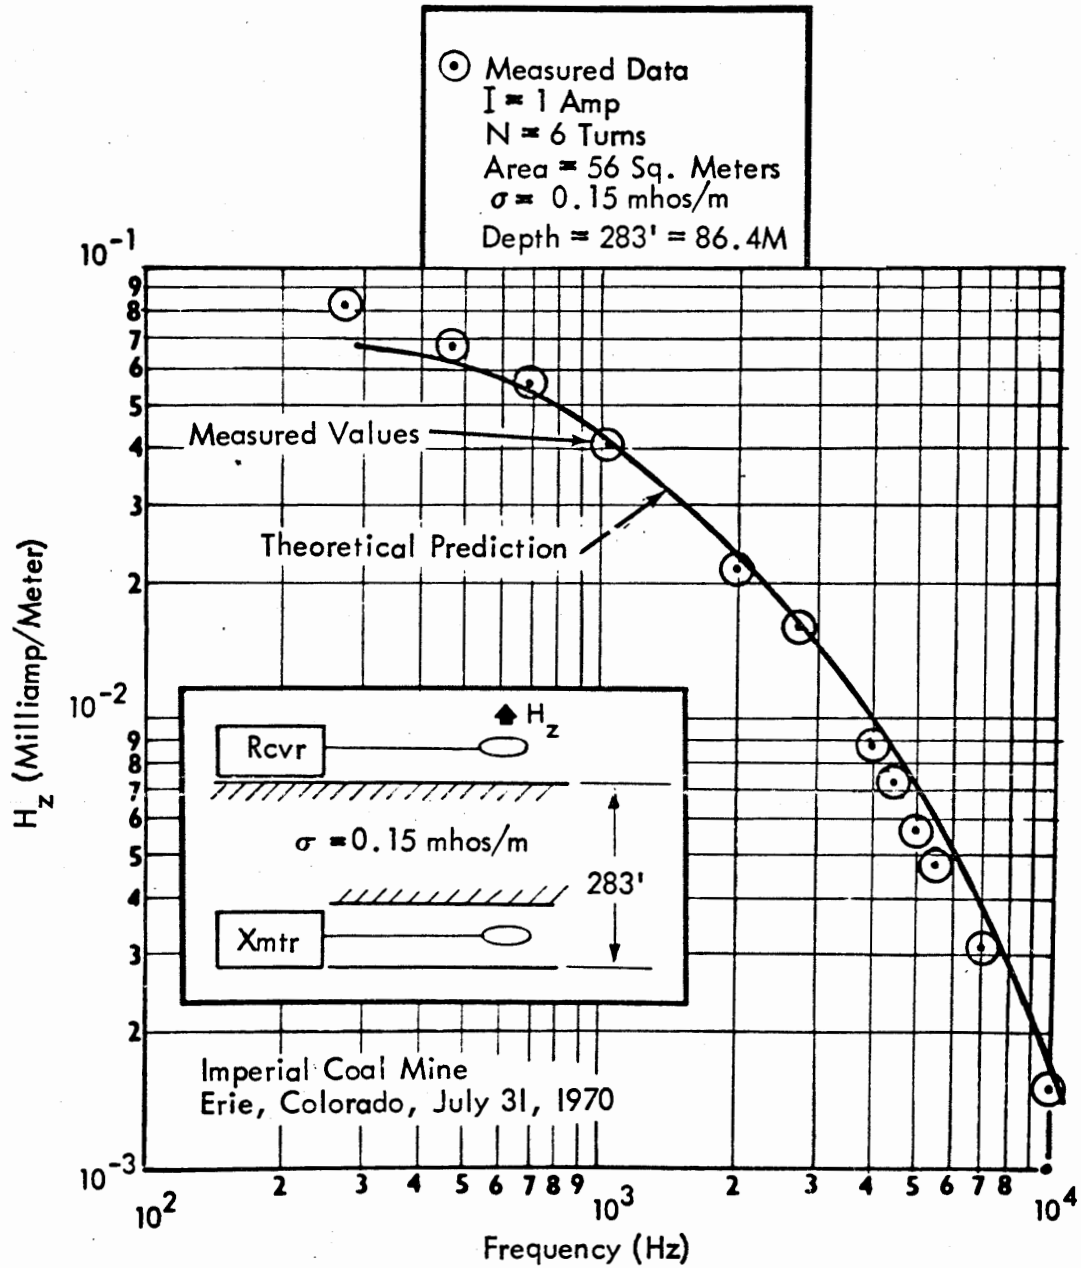


Figure 2.

Comparison of Measured Magnetic Field With Theoretical Prediction for Beacon (Uplink) System


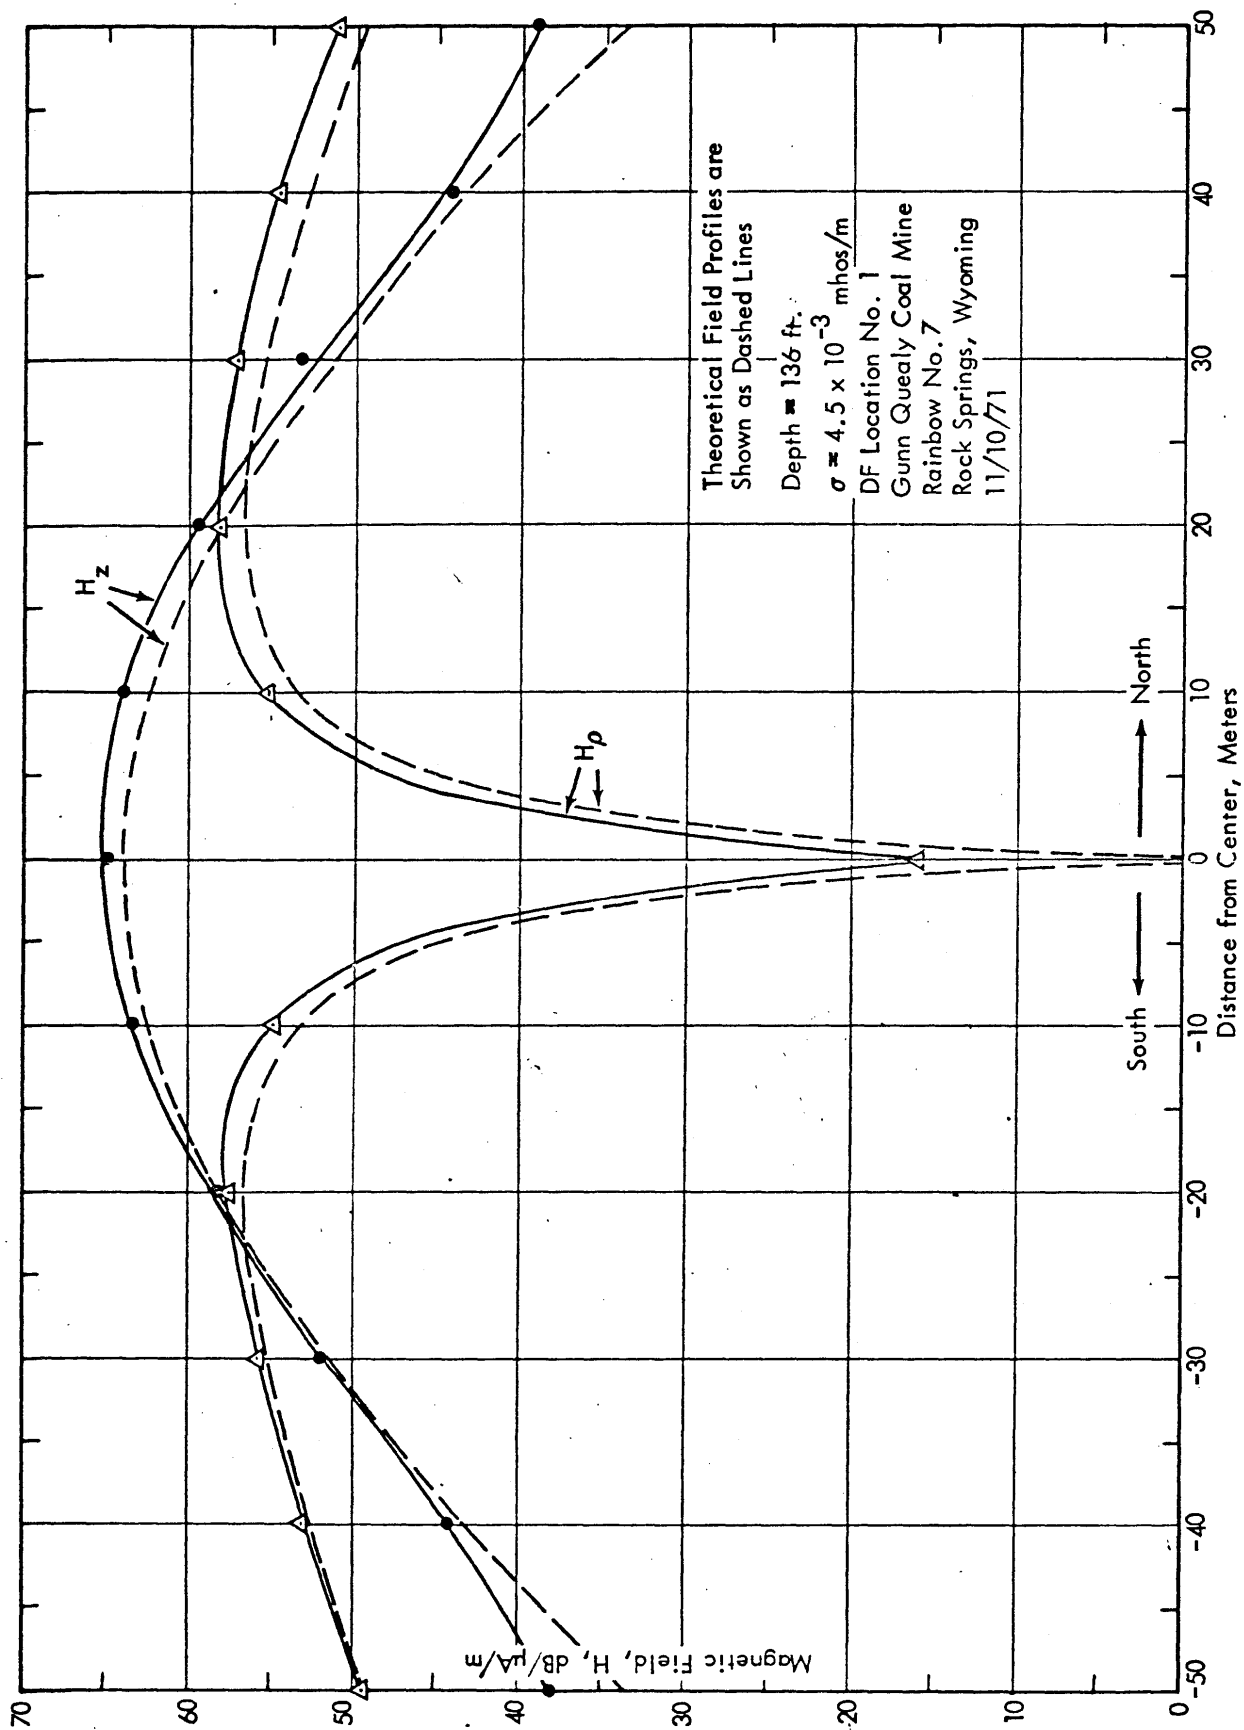


Figure 3 Electromagnetic Surface Pattern from Buried VMD
(North-South Profile)

Figure 4. Signal and Atmospheric Noise Field
 Estimates for Geneva Mine.
 ($\sigma = 2.7 \times 10^{-2}$ mhos/meter²)
 INA = 2000 amp-turn-meters².)

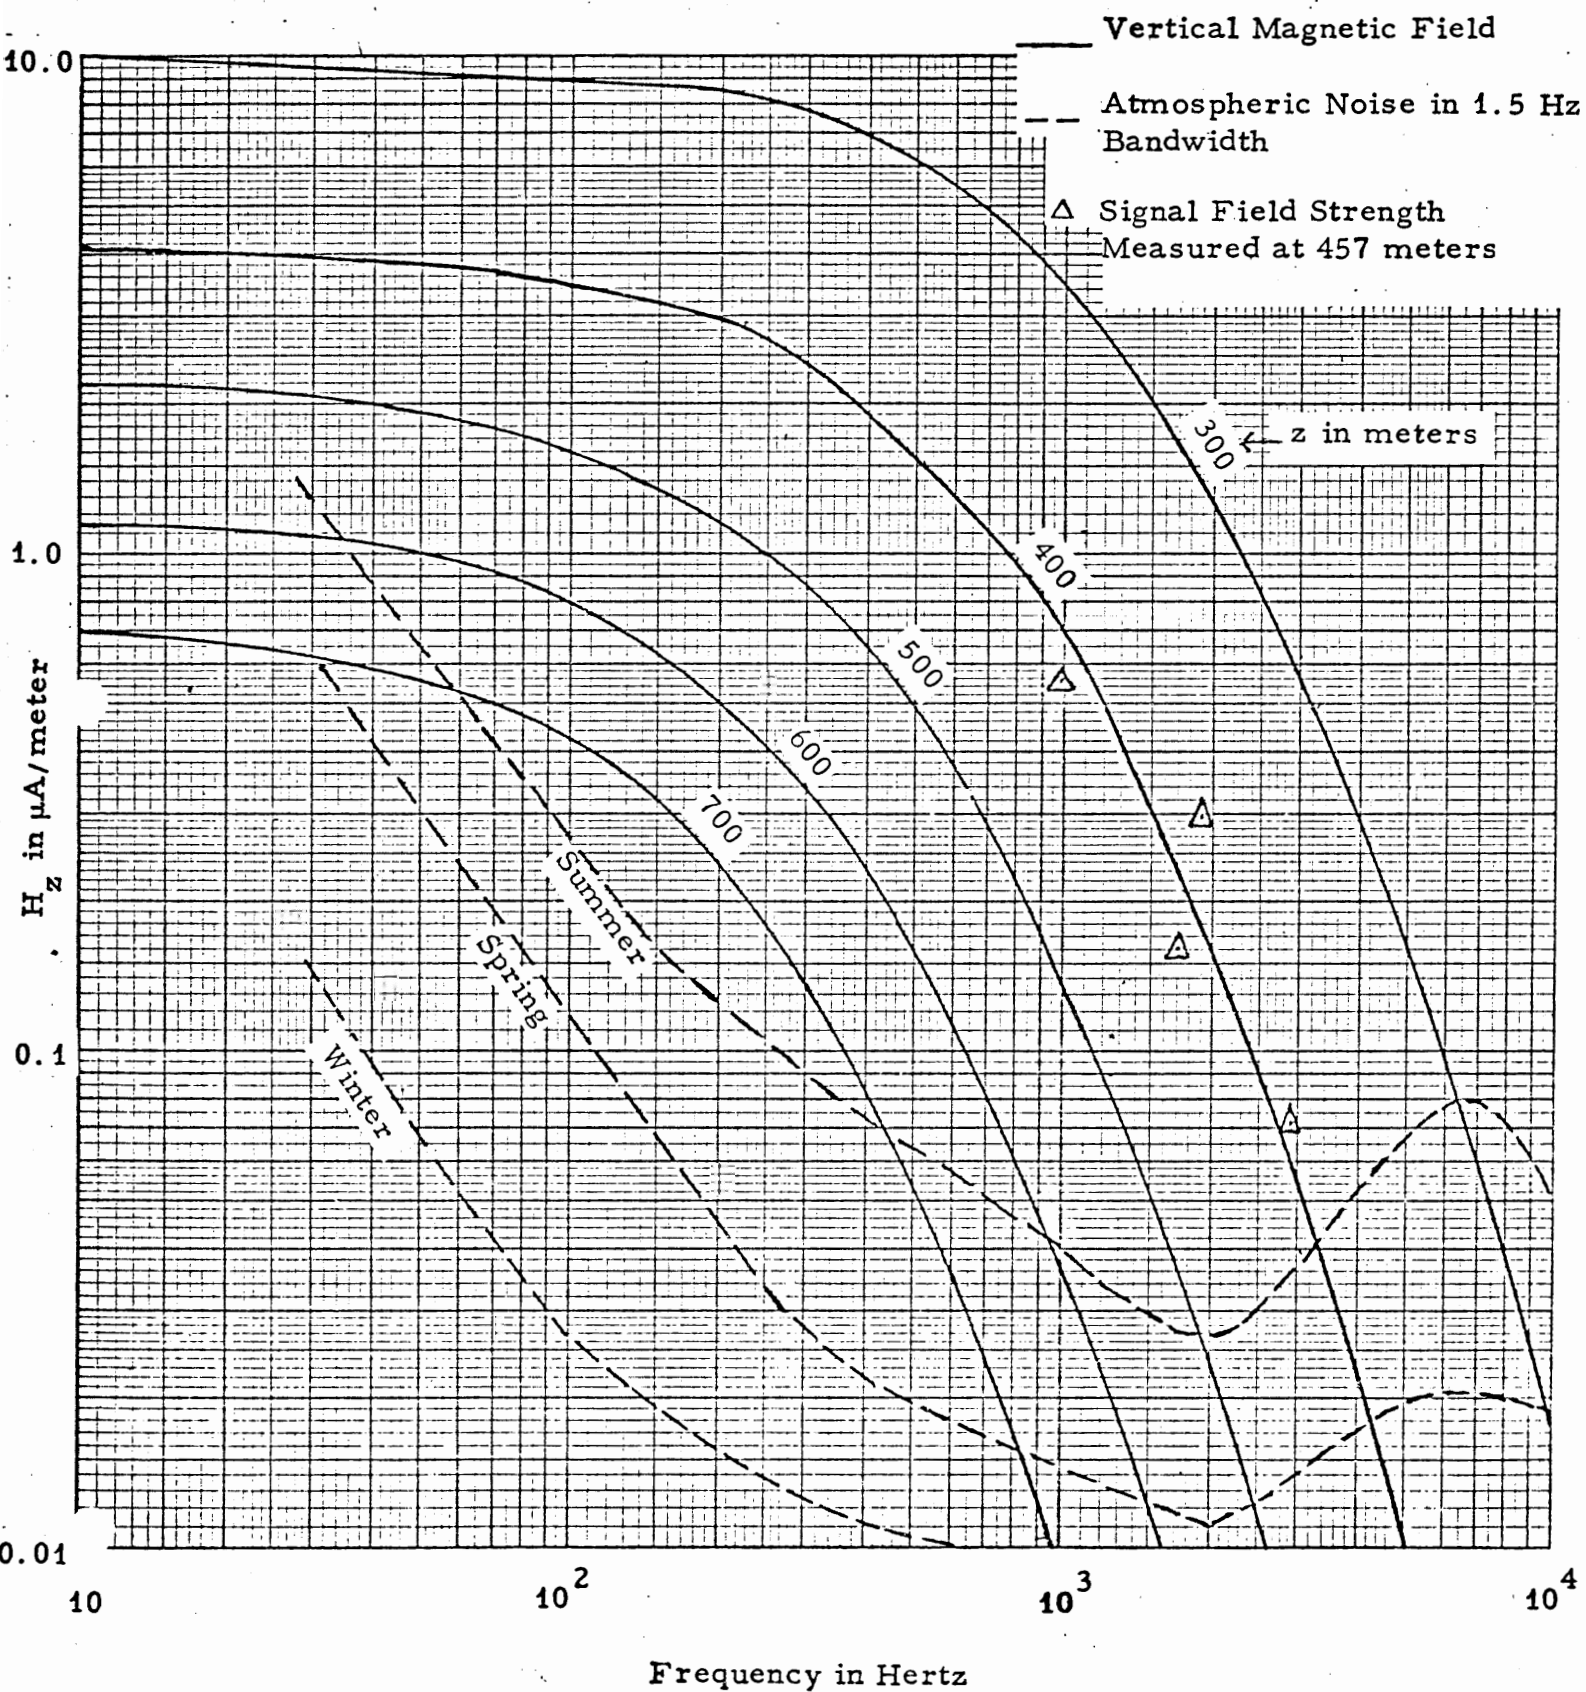

3.2 Manpack Transmitter

The initial development of a manpack location transmitter resulted in a half-wave system packaged inside the miner's battery cap. The transmitting antenna consisted of a 100 foot flat ribbon conductor wound into a tape measure enclosure. Upon deployment, the two-conductor cable was laid out in the form of a circle on the mine floor and connected to the output terminals of the transmitter. Several amperes of rms current were fed into the loop antenna at a duty cycle of 200 milliseconds on and 2 seconds off. It was discovered during tests at the Robena #4 coal mine in Pennsylvania that the system would operate continuously for greater than 72 hours and still be detectable through nearly 1000 feet of overburden. A later version of this transmitter utilized essentially the same on-off duty cycle but incorporated a full-wave push-pull arrangement in the output stage during each 200 millisecond tone burst. With the full-wave transmitter, a tuning capacitor was inserted in series with the antenna at the higher frequencies (1700 Hz - 2900 Hz) giving an increase in current of up to 3 times that of the untuned equivalent. The full-wave transmitter was tested at the Geneva Mine in Dragerton, Utah and generated transmitter moments of up to 2000 ampere-turn-meters squared using a 500 foot length of No. 12 wire wound around a coal pillar as an antenna.

3.3 Manpack Locator

The portable receiver used to measure the magnetic field profiles on the surface utilizes a tuned air core receiving loop followed by a six stage tuned amplifier with a gain of approximately 105 dB and an overall sensitivity of 0.02 μ A/meter. The bandwidth of this receiver is approximately 0.2% of the tuned frequency. It has a phone jack output which can be used for hook up to earphones for null detection purposes or a portable oscilloscope for measuring field strength profiles.

3.4 Multichannel Receiver

The multichannel receiver consists of six narrowband receiver circuits tuned to different frequencies and packaged in a common enclosure. The outputs of each channel are selectively summed together in a summing amplifier to drive a set of earphones. Also, each channel is individually metered on the front panel. This receiver was designed primarily for helicopter reconnaissance work but also is useful for ground search operations. The antenna used with the multichannel receiver is a 24" square loop with 600 turns of No. 28 wire. A built-in battery operated preamp is included in the antenna enclosure to drive the 35 foot connecting cable between the antenna, towed beneath the helicopter, and the receiver in the helicopter cabin.

4.0 Test Results

4.1 Robena No. 4 Mine, Waynesburg, Pennsylvania

Table 1 outlines the results of the tests conducted at the Robena Mine No. 4 near Waynesburg, Pennsylvania. The overburden at this mine ranged from 725 feet to 990 feet at the location chosen for the tests. Comparison of surveyed locations with locations determined by the electromagnetic null were mostly in agreement within less than 50 feet. This is considered sufficient location accuracy for practical mine rescue applications. Helicopter tests were also conducted here and demonstrated a horizontal detection range of about 1000 feet while flying at an elevation of 100 feet over a location with 725 feet of overburden.

4.2 Geneva Mine, Dragerton, Utah

Tests at the Geneva Mine represented the severest test to the use of the electromagnetic location system of any coal mine visited to date. Not only was the overburden depth considerably greater than the mines in the Eastern coal region, but also the conductivity was higher ($\sigma \approx 2 \times 10^{-2}$ mhos per meter), and the terrain more rugged. The feasibility of using intrinsically safe manpack transmitters in the mine with signals detectable from a helicopter over 1500 feet of overburden was clearly demonstrated. Oscilloscope photographs of the receiver output, recorded in the helicopter, are shown in Figure 5. Location accuracies at this mine were not as good as anticipated but were in most cases within 1 or 2 coal blocks (150-300 ft) of the actual source. Some ambiguities were uncovered in the null technique when operating in extremely rugged terrain such as this. These ambiguities, which consist of secondary nulls, have been verified by comparison with theoretical profiles for the Geneva Mine conditions.

5.0 Conclusions

Results of field tests conducted under "worst case" conditions have demonstrated the feasibility of using through-the-earth electromagnetic signals for detection and location of trapped miners equipped with manpack transmitters. Furthermore, the prototype receiving equipment is lightweight and easy to operate suggesting that unskilled personnel could be used in rescue search operations. Helicopter reconnaissance using a multichannel receiver and a towed loop and preamplifier provides a rapid means of determining the existence and general location of signals emanating from the mine. Signal reception at the mine portal provides another quick method of detecting the existence of signals. Precise location of EM sources over hilly terrain is sometimes hampered by profile ambiguities and secondary nulls. Further research is needed to develop techniques for resolving these ambiguities in the field.


TABLE 1

Results of Robena Mine Tests


Location	f	Transmitting Antenna	Overburden	Slope	Field Strength [*]	Uncorrected Location Error	Horizontal Detection Range	Corrected Location Error
A	2070	#10 Wire	800 ft.	16°	-5dB/ μ A/m	18 ft.	1125 ft.	27 ft.
B	2010	4 Manpack Antennas	725 ft.	0 - 13°	-14dB/ μ A/m	27 ft.	390 ft.	27' - 3'
C	3030	#10 Wire	725 ft.	0 - 13°	-3dB/ μ A/m	50 ft.	890 ft.	50' - 2'
D	1050	4 Manpack Antennas	990 ft.	16°	-26dB/ μ A/m	8 ft.	360 ft.	67'
E	2070	#10 Wire	990 ft.	16°	-15dB/ μ A/m	17 ft.	800 ft.	58'

* Represents relative field strength indication on the output meter. For pulsed signals, this meter indication is about 20dB low.


<u>Undetectable Signals</u>					<u>Comments</u>
F	2010	Single Manpack	800 ft.	16°	Power Line within 200 ft.
G	3030	Antenna " "	800 ft.	16°	
H	1050	" "	725 ft.	13°	Power Cables and metal Pipes Running up both Sides of Entry.

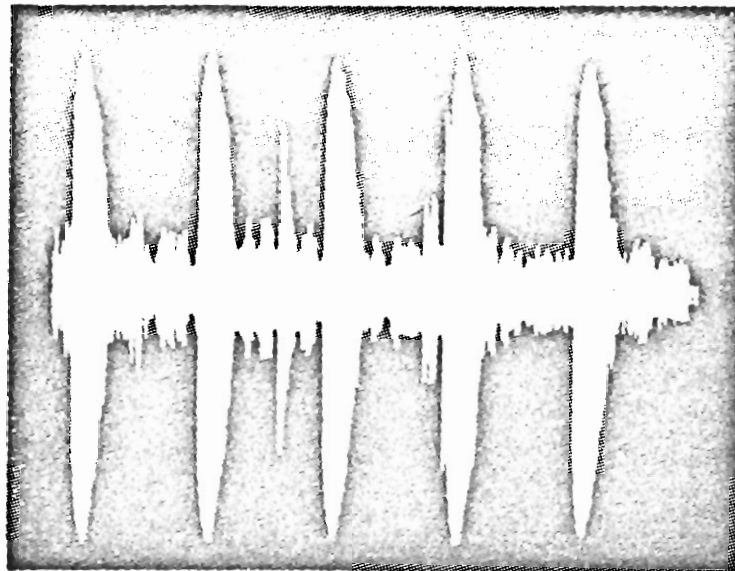

$f = 922.5 \text{ Hz}$
 $d = 1400 \text{ feet}$
 $\text{Alt.} = 100 \text{ feet}$

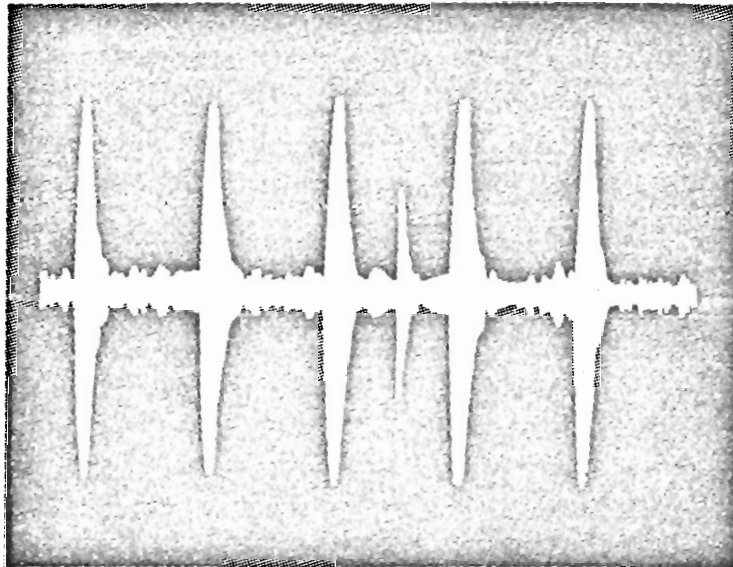

$f = 1900 \text{ Hz}$
 $d = 1150 \text{ feet}$
 $\text{Alt.} = 100 \text{ feet}$

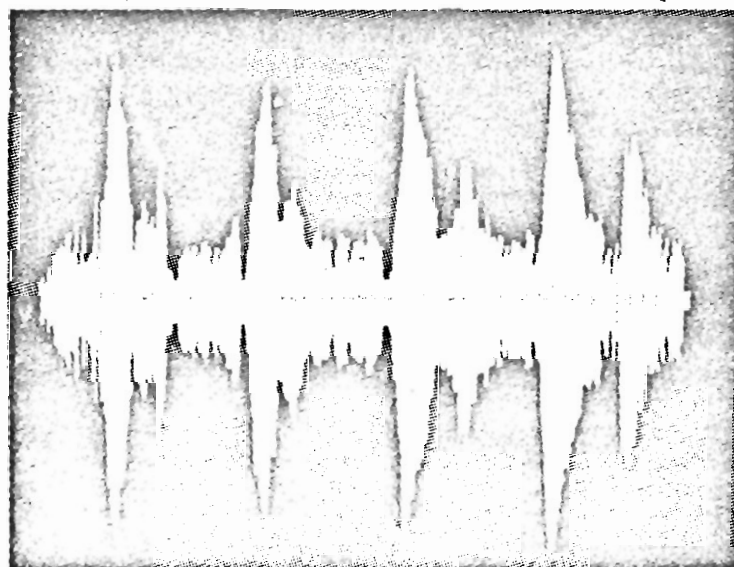

$f = 982.5 \text{ Hz}$
 $+ 2900 \text{ Hz}$
 $d = 1500 \text{ feet}$
 $\text{Alt.} = 100 \text{ feet}$

Figure 5. Received Signals from Multichannel Receiver in Flight

6.0 Acknowledgments

The work described in this paper was prepared by Westinghouse Georesearch Laboratory, 8401 Baseline Road, Boulder, Colorado 80303 under USBM Contract No. H0220073 and H0232049. The contract was initiated under the Coal Mine Health and Safety Research Program. It was administered under the technical direction of the Pittsburgh Mining and Safety Research Center with Mr. H. E. Parkinson acting as the technical project officer. Mr. G. Honold was the contract administrator for the Bureau of Mines.

7.0 References

- [1] C. L. Colburn, C. M. Bouton, and H. B. Freeman, "Underground signaling with radio sets," U.S. Bureau of Mines, R.I. 2407, 1922.
- [2] J. J. Jakosky, "Radio as a method of underground communication in mines," U.S. Bureau of Mines, R.I. 2599, 1924.
- [3] J. J. Jakosky and D. N. Zellers, "Factors retarding transmission of radio signals underground, and some further experiments and conclusions," U.S. Bureau of Mines, R.I. 2561, 1924.
- [4] J. J. Jakosky and D. N. Zellers, "Line radio and effects of metallic conductors on underground communications," U.S. Bureau of Mines, R.I. 2682, 1925.
- [5] L. C. Ilsley, H. B. Freeman, and D. N. Zellers, "Experiments in underground communication through earth strata," U.S. Bureau of Mines, T.P. 433, 1928.
- [6] J. R. Wait, Electromagnetic Waves in Stratified Media, Pergamon Press, 1962.
- [7] J. R. Wait, "Criteria for Locating an Oscillating Magnetic Dipole Buried in the Earth," Proc. IEEE, Vol. 59, No. 6, pp. 1033-1035, June, 1971.
- [8] R. G. Olsen and A. J. Farstad, "Electromagnetic Direction Finding Experiments for Locating Trapped Miners," to be published in "IEEE Transactions on Geoscience Electronics," October, 1973.

USBM Grant No. G133023
THRU-THE-EARTH ELECTROMAGNETICS WORKSHOP
Richard G. Geyer
USBM CONTRACT FINAL REPORT
(Contract/Grant No. G133023)
Date: December 31, 1973
DEPARTMENT OF THE INTERIOR
BUREAU OF MINES
WASHINGTON, D. C.

DISCLAIMER NOTICE

The views and conclusions contained in this document are those of the author(s) and should not be interpreted as necessarily representing the official policies of the Interior Department's Bureau of Mines or the U. S. Government.

PROCEEDINGS OF
THRU-THE-EARTH ELECTROMAGNETICS WORKSHOP

August 15 - 17, 1973

Colorado School of Mines

Sponsored By
United States Bureau of Mines

Edited By Richard G. Geyer

FOREWORD

This report was prepared by Richard G. Geyer under USBM Contract/Grant No. G133023. The grant was initiated under the Coal Mine Health and Safety Research Program. It was administered under the technical direction of the Pittsburgh Mining and Safety Research Center with Mr. Howard E. Parkinson acting as the technical project officer. Mr. A. L. Metheney was the contract administrator for the Bureau of Mines.

This report is a summary of the work recently completed as part of this grant during the period April 1, 1973 to December 31, 1973. This report was submitted by the author on December 31, 1973.