

34th International Conference on Ground Control in Mining

A Survey of the Current Rib Support Practices and Techniques in U.S. Coal Mines

Khaled M Mohamed, Associate Service Fellow
Michael M Murphy, Team Leader
Ground Control Branch
NIOSH, Office of Mine Safety and Health Research
Pittsburgh, PA

Heather E Lawson, Senior Ground Control Research Engineer
Ground Control Branch
NIOSH, Office of Mine Safety and Health Research
Spokane, WA

Ted M Klemetti, Senior Scientist
Ground Control Branch
NIOSH, Office of Mine Safety and Health Research
Pittsburgh, PA

ABSTRACT

The design of rib support systems in U.S. coal mines is based primarily on local practices and experience. A better understanding of current rib support practices in U.S. coal mines is crucial for developing a sound engineering rib support design tool.

The objective of this paper is to analyze the current practices of rib control in US coal mines. Twenty (20) underground coal mines were studied representing various coal basins, coal seams, geology, loading conditions, and rib control strategies.

The key findings are: (1) any rib design guideline or tool should take into account external rib support as well as internal bolting; (2) rib bolts on their own cannot contain rib spall, especially in soft ribs subjected to significant load—external rib control devices such as mesh are required in such cases to contain rib sloughing; (3) the majority of the studied mines follow the overburden depth and entry height thresholds recommended by the Program Information Bulletin (PIB) 11-29; (4) potential rib instability occurred when certain geological features prevailed—these include draw slate and/or bone coal near the rib/roof line, claystone partings, and soft coal bench overlain by rock strata; (5) 47% of the studied rib spall was classified as blocky—this could indicate a high potential of rib hazards; and (6) rib injury rates of the studied mines for the last three years emphasize the need for more rib control management for mines operating at overburden depths between 500 ft and 1,000 ft.

INTRODUCTION

Efforts to improve the stability of underground mine ribs have continued for decades. These efforts by mining professionals around the world persisted throughout the 1990s and 2000s as well, though much of this work focused on rib support methodology and selection of proper support for a specific location. Despite these efforts, it is unfortunate that there has been a continual occurrence of rib-related fatalities in underground coal mines. While overall improvements in rib safety have been achieved, the average fatality rate is still about 1.3 fatalities per year over the last 18 years (Jones, 2014).

To manage and control the rib hazard, rib support is used in U.S. coal mines. The current rib support methods for U.S. mines fall into two main categories: rib control based on intrinsic support systems and those based on external support systems. Intrinsic or rib-bolt support requires a roof bolting machine that can install a bolt fixture into the rib. Furthermore, the appropriate level of support needed to control the ribs with an intrinsic-based support system as well as the design parameters for those support systems for various mine conditions have not been established in U.S. coal mines. Furthermore, surface control systems are often an integral part of these support systems and must be considered in the system design.

For mines that do not have the capability to install rib bolts, external rib controls are used, in the form of rib props, vertical fixtures anchored to the roof and/or floor, and pillar banding (the wrapping of pillars with support materials). Banding of pillars can be effective but in many cases is not a very practical method to control the ribs, especially when pillar recovery mining is planned. Rib control through the use of props provides a more practical solution for these mines. However, no design criteria or guidelines have been established for prop-type support systems for rib control.

The design of rib support systems in U.S. coal mines is based primarily on local practices and experience. A better understanding of current rib support practices in U.S. coal mines is crucial for developing a sound engineering rib support design tool.

The objective of this paper is to analyze the current practices of rib control in U.S. coal mines. Twenty (20) underground coal mines were studied representing various coal basins, coal seams, geology, loading conditions, and rib control strategies.

DESCRIPTION OF COAL MINE RIB DATABASE

Twenty (20) underground coal mines were studied between 2012 and 2014. Up to five sites were studied at each mine during single-day visits. Despite limitations in access to a large number of operating coal mines, the studied mines provided detailed information for each site. The information presented in this study has not been provided by any of the studied mines, it was solely collected by the authors.

34th International Conference on Ground Control in Mining

Half of the studied mines are classified as supported rib mines that include rib-bolt support, Table 1. They are referred to as SR 1 to SR 10. The other half of the mines are classified as unsupported rib mines that do not include rib-bolt support, Table 2. They are referred to as USR 1 to USR 10. A total of 61 case studies (sites) were collected from the studied mines. The site names are composed of two parts—the mine name and the site number. The sites were chosen to represent different loading conditions (development, pillaring, and longwall head and tailgate loadings), different overburden depths, different entry heights and different geology. It is important to note that the investigated sites are only snapshots of isolated locations and do not represent a comprehensive picture of the mine.

Appalachian, Central Appalachian, Illinois, Unita, and Powder River (Figure 1). The studied mines are operating in twelve (12) coal seams. Five mines are in the Herrin coal seam. The Herrin coal seam has some regional variation in nomenclature, such as the Herrin No. 6 seam in Illinois, the Herrin No.11 seam in Western Kentucky, and the Herrin seam in Indiana. Three mines are operating in the Pittsburgh No. 8 seam, two mines in the Eagle seam, and two mines in the Springfield coal seam. The rest of the mines are operating in the Mammoth, No. 2 Gas, Imboden, Kellioka, Pocahontas No. 3, Upper B, D2, and Taggart coal seams. The Herrin No. 6 and Pittsburgh No. 8 coal seams are the most heavily represented seams in this study.

Table 1 - Geometrical data and geological features at the supported sites.

| Mine name | Mine type | Site # | Mining Cycle | Overburden depth (ft) | Entry Height (ft) | Stone % | Geologic feature | Spall volume (ft ³ /ft) | Type of rib failure |
|-----------|-----------|---------|--------------|-----------------------|-------------------|---------|------------------|------------------------------------|---------------------|
| SR 1 | R&P | SR 1-1 | DEV | 1,040 | 7.5 | 48 | NO | 0 | None |
| | | SR 1-3 | DEV | 1,050 | 7.0 | 23 | YES | 1.78 | 2 |
| | | SR 1-2 | DEV | 1,000 | 7.7 | 31 | YES | 3.75 | 2 |
| SR 2 | LW | SR 2-1 | DEV | 900 | 8.9 | 22 | YES | 1.17 | 3 |
| | | SR 2-2 | HGS | 780 | 7.3 | 3 | YES | 0.13 | 3 |
| | | SR 2-3 | HGS | 780 | 7.3 | 3 | YES | 0 | 3 |
| | | SR 2-4 | TGF | 875 | 7.8 | 9 | YES | 4.58 | 3 |
| | | SR 2-5 | TGF | 875 | 8.4 | 15 | YES | 1.58 | 3 |
| SR 3 | R&P | SR 3-1 | DEV | 1,615 | 10.4 | 47 | YES | 1.46 | 3 |
| | | SR 3-2 | DEV | N/A | 8.8 | 49 | YES | 0.63 | 3 |
| | | SR 3-4 | DEV | 1645 | 7.7 | 34 | YES | 0 | 3 |
| | | SR 3-3 | DEV | 1780 | 8.0 | 39 | YES | 0.22 | 3 |
| SR 4 | LW | SR 4-1 | HGF | 625 | 8.3 | 22 | YES | 0.31 | 2 |
| | | SR 4-2 | TGF | 680 | 8.3 | 22 | YES | 0 | 1 |
| SR 5 | R&P | SR 5-1 | DEV | 975 | 6.1 | 45 | YES | 0 | None |
| | | SR 5-3 | DEV | 730 | 6.1 | 56 | YES | 0 | None |
| | | SR 5-2 | DEV | 1,200 | 12.1 | 44 | NO | 0 | None |
| SR 6 | R&P | SR 6-1 | PIL | 650 | 7.0 | 53 | NO | 0 | None |
| | | SR 6-2 | DEV | 900 | 8.1 | 53 | NO | 0 | None |
| SR 7 | LW | SR 7-1 | TGS | 805 | 10.6 | 0 | NO | 0 | None |
| | | SR 7-2 | TGS | 1,165 | 9.7 | 0 | YES | 2.29 | 1 |
| | | SR 7-3 | HGS | 1,055 | 8.8 | 4 | YES | 0 | None |
| | | SR 7-4 | TGF | 900 | 9.3 | 0 | YES | 1.17 | 1 |
| | | SR 7-5 | TGS | 910 | 9.0 | 8 | NO | 0.78 | 3 |
| | | SR 7-6 | TGS | 905 | 10.3 | 17 | NO | 0 | 1 |
| | | SR 7-7 | HGF | 905 | 10.3 | 17 | YES | 4.17 | 4 |
| SR 8 | LW | SR 8-1 | DEV | 1,150 | 7.8 | 44 | YES | 0.33 | 3 |
| | | SR 8-2 | HGS | 1,240 | 6.3 | 27 | YES | 1.67 | 3 |
| | | SR 8-3 | HGF | 1,310 | 7.1 | 48 | YES | 1.63 | 3 |
| | | SR 8-4 | DEV | 1,325 | 7.8 | 44 | NO | 0 | None |
| | | SR 8-5 | DEV | 1,325 | 9.7 | 45 | NO | 0 | None |
| SR 9 | LW | SR 9-1 | DEV | 2,275 | 11.3 | 1 | YES | 0.08 | 3 |
| | | SR 9-2 | HGF | 2,500 | 10.3 | 1 | YES | 0.58 | 2 |
| | | SR 9-3 | HGS | 2,550 | 10.5 | 0 | NO | 3.75 | 2 |
| | | SR 9-4 | TGS | 2,200 | 10.5 | 40 | YES | 3.56 | 3 |
| SR 10 | R&P | SR 10-1 | DEV | 1,750 | 9.8 | 51 | YES | 0.08 | 3 |
| | | SR 10-2 | DEV | N/A | 5.7 | 25 | NO | 0.88 | 3 |
| | | SR 10-3 | DEV | 1,900 | 7.6 | 40 | NO | 0.97 | 3 |

LW = Longwall, R&P = Room & Pillar, DEV = Development, HGS= Headgate Side abutment, TGF = Tailgate corner Front abutment,

The studied mines are located in five coal basins: Northern

34th International Conference on Ground Control in Mining

Table 2 - Geometrical data and geological features at the unsupported sites.

| Mine name | Mine type | Site # | Mining Cycle | Overburden depth (ft) | Entry Height (ft) | Stone % | Geologic feature | Spall volume (ft ³ /ft) | Type of rib failure |
|-----------|-----------|----------|--------------|-----------------------|-------------------|---------|------------------|------------------------------------|---------------------|
| USR 1 | LW | USR 1-1 | DEV | 530 | 7.6 | 27 | YES | 0.42 | 2 |
| | | USR 1-2 | HGS | 575 | 6.7 | 18 | YES | 2.11 | 3 |
| | | USR 1-3 | TGF | 565 | 7.7 | 32 | NO | 0.42 | 3 |
| USR 2 | R&P | USR 2-1 | DEV | 800 | 6.4 | 3 | NO | 0.05 | 2 |
| | | USR 2-2 | DEV | 845 | 6.2 | 2 | YES | 2.81 | 1 |
| USR 3 | R&P | USR 3-1 | DEV | 510 | 7.0 | 0 | NO | 2.52 | 1 |
| | | USR 3-2 | DEV | 496 | 6.0 | 31 | NO | 0.29 | 2 |
| USR 4 | R&P | USR 4-1 | DEV | 350 | 7.5 | 12 | YES | 0.00 | None |
| | | USR 4-2 | DEV | 350 | 8.2 | 20 | YES | 3.43 | 3 |
| | | USR 4-3 | DEV | 360 | 8.4 | 16 | YES | 0.00 | None |
| USR 5 | R&P | USR 5-1 | DEV | 150 | 8.1 | 19 | NO | 0.08 | 4 |
| | | USR 5-2 | DEV | 250 | 8.8 | 19 | NO | 0.13 | 4 |
| USR 6 | LW | USR 6-1 | DEV | 165 | 9.8 | 14 | NO | 0.00 | None |
| USR 7 | R&P | USR 7-1 | DEV | 158 | 8.2 | 36 | NO | 0.00 | 3 |
| USR 8 | LW | USR 8-1 | DEV | 570 | 6.8 | 15 | NO | 1.17 | 3 |
| | | USR 8-2 | DEV | 520 | 8.0 | 17 | NO | N/A | 3 |
| | | USR 8-3 | HGS | 520 | 7.2 | 17 | NO | 1.46 | 2 |
| USR 9 | R&P | USR 9-1 | DEV | 191 | 6.4 | 40 | YES | 2.60 | 3 |
| | | USR 9-2 | DEV | 183 | 6.2 | 47 | NO | 1.50 | 3 |
| | | USR 9-3 | DEV | 200 | 7.0 | 27 | NO | N/A | 3 |
| USR 10 | R&P | USR 10-1 | PIL | 1,100 | 8.1 | 39 | YES | 3.00 | 3 |
| | | USR 10-2 | DEV | 800 | 7.5 | 57 | NO | 0.00 | None |
| | | USR 10-3 | DEV | 950 | 7.0 | 51 | NO | 0.33 | 2 |



Figure 1. US coal basins (East, J.A., 2013).

Twelve (12) of the studied mines are room-and-pillar mines and eight (8) are longwall mines. The room-and-pillar mines operating in Illinois coal basin do not perform pillar extraction. The unsupported mines come almost entirely from the Illinois coal basin, whereas the majority of the supported mines come from the Appalachia coal basin.

CURRENT PRACTICES OF RIB CONTROL IN U.S. COAL MINES

30 CFR (Code of Federal Regulations, 2010) states that “The roof, face and ribs of areas where persons work or travel shall be supported or otherwise controlled to protect persons from the hazards related to falls of the roof, face or ribs and coal or rock bursts”. Currently, there are no minimum design requirements for rib support. This study is part of a larger effort to develop a rib support design tool. The crucial questions toward this end are:

1. What are the applied rib control techniques in U.S. coal mines?
2. What are the factors affecting rib performance?
3. How effective are the applied rib control methods to prevent rib injuries and fatalities in U.S. coal mines?

Rib control techniques applied in U.S. coal mines

The applied rib control techniques observed in underground coal mines include the following: (1) re-orienting the roadways with respect to the orientation of the cleat system in the coal seam, (2) installing intrinsic rib support systems in the form of bolts with or without meshes, (3) installing external rib support systems in the form of meshes (steel and synthetic), props, vertical fixtures anchored to the roof and/or floor, and pillar banding, etc., and (4) employing several of these methodologies simultaneously.

34th International Conference on Ground Control in Mining

Table 3 - Intrinsic rib support and the Rib Support rating (RIBSUP) of the surveyed mines.

| Site # | Bolt | | | | | | | | Plate | | Mesh | | | | RIBSUP | Notes |
|---------|------|-------|---------------|---------------------|------------|-------------|--------------|-------|-------------------------------|--------|------------|---|--------------|------|--------|-------|
| | Type | Grade | Diameter (in) | Shear strength (lb) | No of rows | Length (in) | Spacing (in) | RBOLT | Plate area (in ²) | FPLATE | Liner Type | Control area/10ft rib line (in ²) | Coverage (%) | CF | | |
| SR 1-1 | FG | 60 | 0.875 | 18,040 | 2 | 60 | 54 | 8.72 | 254 | 1.00 | None | | | 8.72 | 5 | |
| SR 1-2 | FG | 60 | 0.875 | 18,040 | 2 | 60 | 54 | 9.34 | 254 | 1.00 | None | | | 9.34 | | |
| SR 1-3 | FG | 60 | 0.875 | 18,040 | 2 | 60 | 54 | 8.49 | 254 | 1.00 | None | | | 8.49 | | |
| SR 2-1 | FG | 60 | 0.75 | 13,254 | 2 | 48 | 72 | 3.78 | 254 | 1.00 | Steel mesh | 5,760 | 45% | 2.35 | 8.88 | 1 |
| SR 2-2 | M/G | 60 | 0.75 | 13,254 | 1 | 60 | 144 | 1.44 | 254 | 1.00 | None | | | 1.44 | | |
| SR 2-3 | Cut | N/A | 1.00 | | 1 | 60 | 144 | | | | | | | | | |
| SR 2-4 | M/G | 60 | 0.75 | 13,254 | 1 | 60 | 144 | 1.35 | 360 | 1.19 | None | | | 1.60 | | |
| SR 2-5 | Cut | N/A | 1.00 | | 1 | 60 | 144 | | | | | | | | | |
| SR 3-1 | M | 60 | 0.625 | 9,204 | 2 | 42 | 72 | 2.36 | 254 | 1.00 | Steel mesh | 9,360 | 63% | 2.88 | 6.78 | 1 |
| SR 3-2 | M | 60 | 0.625 | 9,204 | 2 | 42 | 72 | 2.79 | 254 | 1.00 | None | | | 2.79 | 5 | |
| SR 3-3 | M | 60 | 0.625 | 9,204 | 2 | 42 | 72 | 3.19 | 254 | 1.00 | Plastic | 7,200 | 65% | 2.95 | 9.39 | 2,5 |
| SR 3-4 | M | 60 | 0.625 | 9,204 | 2 | 42 | 72 | 3.07 | 254 | 1.00 | None | | | 3.07 | 5 | |
| SR 4-1 | M | 60 | 0.75 | 13,254 | 2 | 48 | 120 | 2.43 | 254 | 1.00 | None | | | 2.43 | | |
| SR 4-2 | M | 60 | 0.75 | 13,254 | 2 | 48 | 120 | 2.43 | 254 | 1.00 | Plastic | 10,080 | 84% | 3.53 | 8.58 | 3 |
| SR 5-1 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 48 | 3.45 | 254 | 1.00 | None | | | 3.45 | 5 | |
| SR 5-2 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 48 | 3.45 | 254 | 1.00 | None | | | 3.45 | 5 | |
| SR 5-3 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 48 | 1.74 | 254 | 1.00 | None | | | 1.74 | 5 | |
| SR 6-1 | FG | 60 | 0.75 | 13,254 | 1 | 60 | 96 | 2.25 | 256 | 1.00 | None | | | 2.26 | | |
| SR 6-2 | FG | 60 | 0.75 | 13,254 | 1 | 60 | 96 | 1.95 | 256 | 1.00 | None | | | 1.95 | | |
| SR 7-1 | M | 75 | 0.625 | 9,204 | 2 | 48 | 60 | 3.17 | 180 | 0.84 | Plastic | 10,080 | 66% | 2.98 | 9.46 | 4 |
| SR 7-2 | M | 75 | 0.625 | 9,204 | 1 | 48 | 96 | 1.08 | 180 | 0.84 | Plastic | 9,600 | 69% | 3.06 | 3.32 | 4 |
| SR 7-3 | M | 75 | 0.625 | 9,204 | 1 | 48 | 96 | 1.19 | 180 | 0.84 | None | | | 1.01 | | |
| SR 7-4 | M | 75 | 0.625 | 9,204 | 1 | 48 | 96 | 1.13 | 180 | 0.84 | None | | | 0.95 | | |
| SR 7-5 | M | 75 | 0.625 | 9,204 | 2 | 48 | 84 | 2.67 | 180 | 0.84 | None | | | 2.25 | | |
| SR 7-6 | US | | | | | | | | | | | | | | | |
| SR 7-7 | US | | | | | | | | | | | | | | | |
| SR 8-1 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 60 | 2.16 | 96 | 0.61 | None | | | 1.33 | | |
| SR 8-2 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 60 | 2.67 | 96 | 0.61 | None | | | 1.64 | | |
| SR 8-3 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 60 | 2.37 | 96 | 0.61 | None | | | 1.46 | | |
| SR 8-4 | FG | 60 | 0.625 | 9,204 | 1 | 48 | 90 | 1.44 | 96 | 0.61 | None | | | 0.88 | | |
| SR 8-5 | FG | 60 | 0.625 | 9,204 | 2 | 48 | 60 | 3.47 | 96 | 0.61 | None | | | 2.13 | | |
| SR 9-1 | FG | 60 | 0.875 | 18,040 | 2 | 72 | 96 | 3.91 | 96 | 0.61 | Steel mesh | 8,160 | 50% | 2.50 | 9.79 | |
| SR 9-2 | FG | 75 | 1.5 | 53,014 | 2 | 72 | 60 | 11.76 | 36 | 0.38 | Steel mesh | 8,592 | 58% | 2.74 | | |
| SR 9-3 | FG | 60 | 0.875 | 18,040 | 2 | 72 | 96 | 4.20 | 96 | 0.61 | Steel mesh | 8,160 | 54% | 2.62 | 11.01 | |
| SR 9-4 | FG | 60 | 0.875 | 18,040 | 2 | 72 | 72 | 5.61 | 96 | 0.61 | Steel mesh | 8,160 | 54% | 2.62 | 14.68 | 4 |
| SR 10-1 | M | 60 | 0.625 | 9,204 | 3 | 42 | 48 | 5.63 | 254 | 1.00 | Steel mesh | 7,200 | 48% | 2.44 | 13.74 | |
| SR 10-2 | M | 60 | 0.5 | 5,890 | 1 | 72 | 48 | 4.43 | 254 | 1.00 | None | | | 4.43 | | |
| SR 10-3 | M | 60 | 0.625 | 9,204 | 2 | 42 | 48 | 4.84 | 254 | 1.00 | Chain Link | 4,320 | 43% | 2.30 | 11.14 | |

F

Roadway driving direction

Underground observations show that the stability of the face and the ribs in roadways depends on the relative orientation of the roadway with the strike direction of the face (principal) cleat (Holmes, 1981). Under unfavorable roof and/or floor conditions, such as weak roof and floor heave, the cleat system in coal seams could promote rib sloughing. Ribs in roadways tend to be in good condition when the face line is parallel to the principal cleat orientation. Rib stability problems are likely to occur when the angle between the roadway driving direction and face cleat orientation is less than 30° (Holmes, 1981). Face cleat orientation has the largest impact on rib performance during the development stage of mining, while during pillar extraction or longwall retreat its impact on rib performance is secondary (Colwell, 2005).

The orientations of face cleats with respect to the driving direction of the roadways (entries and cross-cuts) were measured. Figure 2 shows the average orientation of face cleats with respect to the direction of the mine entry. It shows that 60% of the unsupported entries are driven at angles of 50° to 90° with respect to face cleat. On the other hand, 60% of the supported ribs entries are driven at angles of 20° to 60° with respect to face cleat system (Figure 2).

It was not possible to evaluate the effect of the face cleat orientation on the measured rib spall volume because of the inherent difficulties in separating the influence of overburden depth and other geological features on the measured rib spall volume.

The studied entries are aligned at a favorable direction with respect to face cleat orientation, where this has been identified as a contributor to rib degradation. The driving directions of the studied roadways could also be defined based on other factors—for example, roof stability, but this factor is not addressed in this research.

Intrinsic or rib-bolt support system

Intrinsic rib support systems involve bolts (non-cutttable and cuttable) installed into the ribs. Non-cutttable rib bolts are made of steel, while cuttable rib bolts are made of fiberglass or plastic.

Rib bolts are categorized based on their anchorage mechanism into mechanical (M), grouted (G), and mechanical/grouted (M/G) bolts. Mechanical and mechanical/grouted anchorage rib bolts are always tensioned during installation.

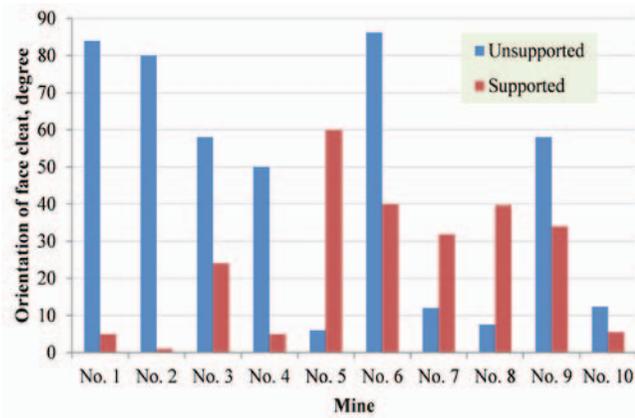


Figure 2. Average face cleat orientation with respect to the driving direction of the mine entry.

Rib bolts are designed to resist both tension and bending loads (Colwell, 2005). Hence, rib bolts support/reinforce the ribs of roadways through one or more of the following mechanisms: (1) anchoring unstable rock and/or coal into an intact portion of pillar or into the roof; (2) resisting the lateral deformation of the solid rib through frictional interlock between the grout and the rib, or by anchoring the fixture into the intact pillar, roof and/or floor; and (3) containing rib sloughing by anchoring meshes into the intact pillar, roof, and/or floor.

Table 3 summarizes the rib-bolt support systems that are applied in the supported sites. The design parameters of rib-bolt support systems are bolt type, grade, diameter, length, number of rib bolt per row, dimensions of bearing/surface plates, and coverage area of mesh if they are applied.

Steel bolts are applied in all supported sites, with the exception of two. Fiberglass bolts were installed at two sites in mine SR2. Both fully grouted and mechanically anchored rib bolts are used equally. Two sites are using the mechanical/grouted anchored bolts. About sixty percent of the sites are using 0.625 in. diameter bolts, followed by 20% using 0.75 in. diameter, and 20% using 0.875 in. diameter. The length of rib bolts varies from 3.5 ft to 6 ft. The majority of the rib bolts are 4 ft long. The spacing of rib bolts varies between 4 ft and 12 ft. Figure 3 and Figure 4 show the distribution of the rib spall volume per foot along the entry versus the bolt diameter and the length of the installed bolts, respectively. These figures show that the largest rib sloughing is observed when longer, larger diameter bolts are installed. It appears that the studied mines choose rib bolts (diameter and length) through reactive action in which longer, i.e. larger diameter bolts are selected to support large rib spalls.

Almost half of the investigated sites use a single row of rib bolts, and the remaining sites use two rows of rib bolts. The exception to this observation is one site (SR 10-1) that uses three rows of rib bolts. There could be many reasons this mine made the decision to install three rows of rib bolts, such as a high overburden depth of 1,750 ft, a high mining height of 9.8 ft, and a bone coal bench at the top section of the rib.

The design parameters of rib-bolt support systems are different from those of roof-bolt support systems. At the studied sites, rib bolts are usually a shorter, smaller diameter than the installed roof

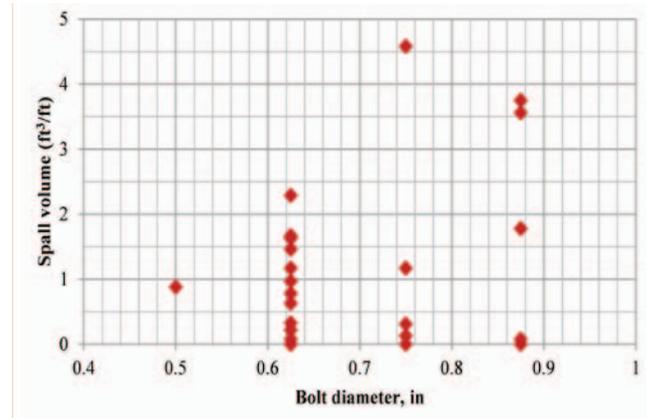


Figure 3. Bolt size vs. rib spall volume at the surveyed sites.

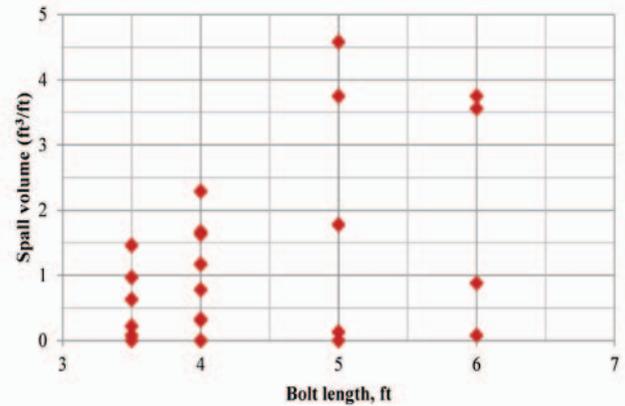


Figure 4. Bolt length vs. rib spall volume at the surveyed sites.

bolts. The diameter of rib bolts is smaller than the diameter of roof bolts at 72% of the studied sites. The length of rib bolts is shorter than the length of roof bolts at 84% of the sites. For about half of the sites, the rib bolts and roof bolts are installed at the same spacing (about 4 ft). The other half of the sites install rib bolts at spacing up to three times the roof bolt spacing.

Rib bolts on their own cannot contain rib spall, especially in soft ribs subjected to significant load. Steel or synthetic meshes are required in such cases to contain rib sloughing. Mesh supports (chain link, steel, and plastic meshes) are installed at about 26% of the supported sites. Mesh supports are usually used in mains, tailgate, pillar corners, and areas subjected to multiple-seam interactions.

The performance of the rib bolt systems at the studied sites could be verified using visual observations. The following example is illustrated through photographs of the mains at mine SR 1. The ribs in the mains show significant sloughing, likely due to the influence of multiple-seam-interactions. Figure 5a shows that the angled rib bolts were installed in soft coal band at about 30" off the roof line. The figure also shows an isolated rib bolt still anchored into intact roof, but around which the rib has sloughed away. The rib bolts alone could not stop the sloughing of coal between bolts. Figure 5b shows the aftermath of failed rib bolts—extensive sloughing of rib material and partial brow formation. It is clear from these examples that rib bolts alone were insufficient to prevent rib sloughing at the studied sites. Use of adequate rib mesh

34th International Conference on Ground Control in Mining

would have likely been beneficial in mitigating the adverse effects of the multiple-seam interaction at the example mine.



Figure 5a. Inadequate rib bolting in the mains of mine SR 1: (a) isolated rib bolts.

External rib support

External rib support systems are structural elements that are not a part of the rib itself. In other words, unlike rib bolts, they are not installed into, but rather installed externally onto the rib. They are erected adjacent to or overlaid onto the roadway ribs. There are many types of external rib support, such as props, mesh held in place with props, fixtures anchored to the roof and/or floor, spray membranes, and pillar banding. External rib control methods support the ribs of roadways through the following mechanisms: (1) containing the softening/sloughing portions of the rib, and (2) restraining the lateral deformation of the detached rib. Primary external rib supports are installed during roadway advance while secondary (supplementary) rib supports are installed later on an as-needed basis.



Figure 5b. Inadequate rib bolting in the mains of mine SR 1: (b) failed rib bolts.

Primary external rib supports are applied at 40% of supported mines. The studied primary external supports are: (1) welded steel mesh at mines SR2, SR 3, SR 9, and SR 10, (2) synthetic mesh at mines SR 9 and SR 10, and (3) chain-link mesh and angle brackets attached to the roof at mine SR 10. Primary external rib supports are applied in the studied mines for the following purposes:

- to contain the rib sloughing at long-term mine workings, such as in the mains of mines SR 2, SR 3, and SR 10,
- to contain rib sloughing of roadways subjected to high overburden depths and/or multiple-seam interactions, such as in mine SR 9, or
- to replace some of the primary rib bolts, as in mine SR 10.



Figure 6a. Timber props (6" x 6") used as secondary supports at the SR 5 mine: (a) rib brow with spalling extended above the bottom row of rib bolts.

Secondary (supplementary) external rib supports are applied at five supported mines and two unsupported mines. The secondary external supports are: (1) welded steel mesh at mine SR 5, (2) synthetic mesh at mines SR 4, SR 5, and SR 7, (3) timber props at mines SR 5, USR 4, and USR 9, (4) steel props at mine SR 9, and (5) steel channels and angle brackets at mine SR 3. Secondary external rib supports are applied in the studied mines for the following purposes:

34th International Conference on Ground Control in Mining

- to support formed rib brows when rib sloughing exists below the bottom row of primary rib bolts (Figure 6a),
- to stabilize fractured rib brow at pillars corners (Figure 6b),
- to stabilize pillar corner of mains (Figure 7a),
- to contain excessive chain pillar deformation because of tailgate loading (Figure 7b),
- to restrain detached rib slabs (Figure 8a and Figure 8b), or
- to limit the span of entries that exceed the designed width and/or height (Figure 9).

One or more external primary support methods were applied at 40% of the supported mines. Secondary external rib support methods are applied at 50% of the supported mines and for 20% of the unsupported mines. Therefore, any rib design tool should consider the applicability of external rib supports.

Factors affecting rib performance

Mine geometry, geologic features, multiple-seam interactions, and support density are the main influences on rib performance. These factors were identified for the studied mines, as described below.

Mine geometry

In 2011, the Mine Safety and Health Administration (MSHA) issued a Program Information Bulletin (PIB) 11-29 (MSHA, 2011) recommending the application of rib support systems in coal mines deeper than 700 ft and whose entry heights exceed 7 ft.

Tables 1 and 2 summarize the geometrical data (overburden depth and entry height) of the supported and unsupported sites, respectively. Based on Table 1, the overburden depths at the supported sites are 625 ft to 2,550 ft with an average overburden depth of 1,230 ft. Based on Table 2, the overburden depths at the unsupported sites are 150 ft to 1,100 ft with an average overburden depth of 484 ft. The mining heights at the supported sites range from 6 ft and 12.1 ft with an average height of 8.6 ft. The mining heights at the unsupported sites range from 6 ft to 9.8ft with an average height of 7.4 ft.

Figure 10 shows the distribution of mining heights and overburden depths at the investigated sites. The figure shows that most of the unsupported sites (about 78 %) are operating at overburden depths of less than 700 ft. Only two unsupported mines (USR 2 and USR 10, marked by hollow diamonds in Figure 10) are operating at overburden depths greater than 700 ft. The decision not to support the coal ribs at mine USR 2 despite high overburden depth (about 820 ft) could be explained by low mining height (about 6.3 ft) and no pillar extractions. The ribs at mine USR 10 are supported on an as-needed basis during pillar extraction which allows for mining with unsupported ribs at overburden depths greater than 700 ft. Figure 10 shows an inverse correlation between the mining height and overburden depth for the unsupported rib sites. As the overburden depth increases, the unsupported roadways have smaller mining heights.



Figure 6b. Timber props (6" x 6") used as secondary supports at the SR 5 mine: (b) fractured brow at intersection.



Figure 7a. External liner support: (a) 48" straps of welded steel mesh at the pillar corner of mains, mine SR 5.



Figure 7b. External liner support: (b) Synthetic grid mesh at the tailgate entry, mine SR 4.



Figure 8b. Timber props (6" x 6") restraining detached rib slabs: (b) mine USR 9.



Figure 8a. Timber props (6" x 6") restraining detached rib slabs: (a) mine USR 4.



Figure 9. Steel channels and timber props at SR 5 mine installed at an entry that exceeded the design width and height.

34th International Conference on Ground Control in Mining

Figure 10 shows that all the supported sites are operating at overburden depths greater than 700 ft except for mine SR 4 and site SR 6-1 (marked as hollow squares in Figure 10). The decision to support coal ribs at mine SR 4 despite shallow overburden depths (less than 700 ft) could be attributable to the large mining height—7 ft in this case. The collected data at site SR 6-1 was not sufficient to explain the decision about overburden depths made at this site.

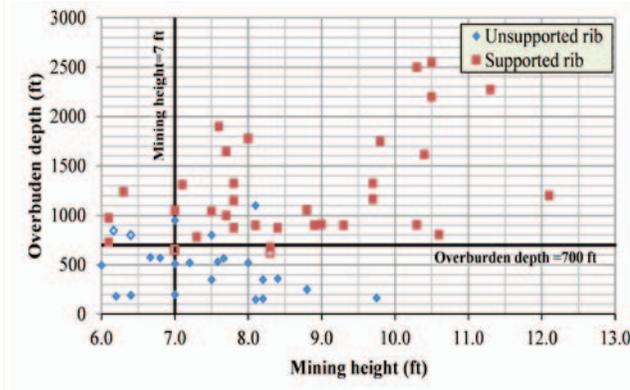


Figure 10. Mining height vs. overburden depth at the surveyed sites.

The majority of the studied mines (78% of the unsupported mines and about 90% of the supported mines) follow the overburden depth and entry height thresholds recommended by the PIB-29.

The impact of overburden depth on rib performance was assessed by measuring the rib spall volume per foot along the entry. Figure 11 shows the distribution of the rib spall volume versus the overburden depth for supported and unsupported sites. The unsupported sites have a wide range of rib spall (0 to 2.52 ft³/ft) at an overburden depth of about 500 ft. With the exception of sites: USR 9-1, USR 9-2, and USR 4-2 (marked by hollow diamonds in Figure 11), the unsupported sites showed no rib spall for overburden depths less than 500 ft. The effects of geology on those particular sites will be addressed in the next section.

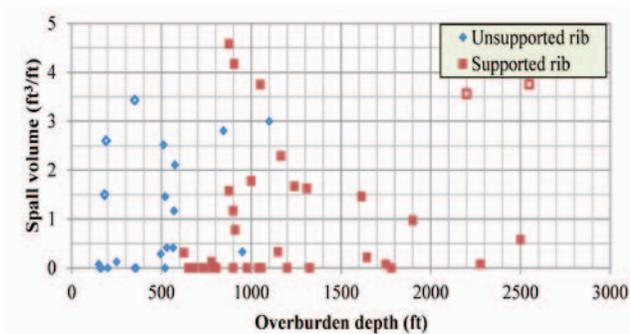


Figure 11. Overburden depth vs. rib spall volume at the surveyed sites.

Figure 11 shows that the supported rib sites have no rib spall at overburden depths less than 900 ft. The supported sites showed a wide range of rib spall (0 to 4.58 ft³/ft) at 900 ft. Decay in rib spall is observed as the overburden exceeds 1,000 ft, except for sites: SR 9-3 and SR 9-4 (hollow squares in Figure 11). This

behavior has been observed previously (Jones, 2014) and may be explained by the emphasis on the quality of rib support at high overburden depths.

Geological features

The geological features at observed sites are the percentage of stone in entry height, in the form of partings of roof or floor rock mined with the coal, and the presence of discontinuities (partings, slickenside, bone coal, etc.).

To assess whether the presence of stone in the rib profile influences the decision to use rib support, the percentage of stone in a vertical cross section of the rib was plotted against the number of sites in which rib support was or was not employed. Figure 12 shows the histogram of stone percentage for both supported and unsupported sites regardless of the overburden depth. It shows that the numbers of supported and unsupported sites are similar for stone percentage less than 30%, while the number of supported sites are 1.7 times the number of unsupported sites for stone percentage greater than or equal to 30%. It could be concluded that the ribs whose stone percentage is greater than 30% are usually supported. This raises the question of how the overburden depth at these locations influences this observation.

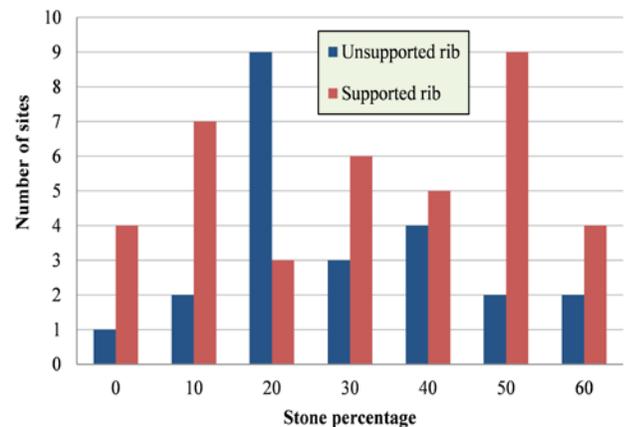


Figure 12. Distribution of stone percentage in the surveyed sites.

To address this issue, the distribution of stone percentage versus overburden for both unsupported and supported sites was considered (Figure 13). It shows that many ribs with a high stone percentage (greater than 35%) are not supported for shallow mines (less than 200 ft deep). Those sites with a high stone percentage at mine USR 10 are not supported even when overburden depth exceeds 700 ft; they maintain their practice of installing support on an as-needed basis, regardless of the percentage of stone in the rib and overburden depth. The low stone percentage (less than 30%) at mine USR 2 (marked by hollow diamonds in Figure 13) may have played a role into the mine's decision not to support the ribs, even when the overburden depth exceeds 700 ft. Despite the low overburden depth (less than 700 ft) at mine SR 4 and site SR 6-1 (hollow squares in Figure 13), the decision was to support coal ribs for those sites.

The collected data is not conclusive regarding the influence of stone percentage on the rib control management, but the mutual interaction between the stone percentage and the overburden depth appears to correlate with the use of rib support.

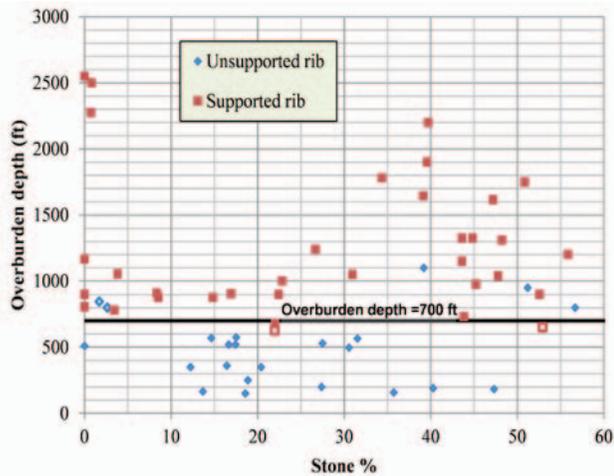


Figure 13. Stone percentage vs. overburden depth at the surveyed sites.

About 68% of the supported sites are affected by geological features (Table 1). On the other hand, about 34% of the unsupported sites are affected by geological features (such as: partings, slickenside, bone coal, etc.) (Table 2). The rib profiles at the supported sites are usually composed of one or more thick rock strata interbedded with one or more thin coal benches.

Potential rib instability may occur when certain geological features prevail—these include draw slate and/or bone coal near the rib/roof line, claystone partings, and soft coal bench overlain by rock strata. The rib bolting objectives in such cases are:

- Supporting the top rock by anchoring it to the intact roof strata above the rib. The top rock is usually supported using rib bolts angled up at 30° to 45° and located at a distance approximately 2 ft from the roof line, or
- Supporting detached coal/rock slabs by one or two rows of bolts. The bottom bolts are usually installed horizontally and should be long enough to anchor the detached slabs to the intact part of coal rib.

The impact of strong contact between (1) the top section of rib and immediate roof, and (2) the coal seam and rock strata on the rib performance can be demonstrated by mines SR 6 and USR 10. The rib at mine SR 6 is composed of 4 ft of coal overlain by 3 to 4 ft of shale (stone). A single row of fully grouted bolts is installed at about 20" from the roof line and angled up at 30° (Figure 14a). The bolts are 5 ft long, installed at spacing of 8 ft. The rib bolts were installed during the development cycle. The objective of the rib bolts is to anchor the top shale unit to the sandstone strata above the rib. During pillar extraction, a continuous miner (CM) was able to safely mine only the coal bench. The shale unit remained attached to the immediate roof for two pillar lengths in by the face.

Mine USR 10 has a very similar mine geometry (overburden depth and mining height) to mine SR 6. The rib at mine USR 10 is composed of 3 to 5 ft of coal overlain by 3 to 4 ft of shale. Unlike mine SR 6, a rider seam at the top section of the rib was easily separated from the immediate roof. This facilitated the detachment of the underlying shale unit which easily broke off. This condition was exacerbated by the fact that the shale unit was underlain by a bright coal bench that tended to slough easily (Figure 14b). Mine

USR 10 tried different bolt designs to support the shale unit, but none were successful. Full mesh would have solved this problem.



Figure 14a. Effect of geological features on rib performance.
(a) Strong contact between the top section and immediate roof in mine SR 6.



Figure 14b. Effect of geological features on rib performance.
(b) Weak contact between the top section and immediate roof in mine USR 10.

The impact of claystone partings on the rib performance can be demonstrated by mine SR 5. The immediate roof is sandstone. The coal seam at mine SR 5 has three benches. The rib shows very little to no deterioration during entry development, with the exception that within a few days rib brows begin to form. Rib bolting is done as part of the development cycle and consists of two rows of 4-ft fully grouted bolts installed at 4-ft spacing. The upper row of rib bolts is angled up at 30 to 45 degrees, and the lower row of rib bolts is installed horizontally. During the mine visit, it was observed that rib brows formed wherever the rock shale is underlain by a claystone parting and soft coal bench (Figure 14c).



Figure 14c. Effect of geological features on rib performance.
(c) Clay band in the rib at mine SR 5.



Figure 15. Large slab formed as result of a thick clay band squeeze at mine USR 9.

The coal seam at sites USR 9-1 and USR 9-2 is about 3 to 4 ft thick underlain by thick clay and stone bands of about 2 to 3 ft (Figure 15). Regardless of the low overburden depth (less than 200 ft) at sites USR 9-1 and USR 9-2, large rib slabs were formed due to squeezing of the clay band at the bottom section of the rib

(Figure 15). Significant spall volume at site USR 4-2 was attributed to slickenside planes cutting the rib (Figure 16).



Figure 16. Large slab formed as result of slickenside plan chuting the rib at mine USR 4.

Rib support density

Colwell (2005) developed an empirical model to rate the rib support density for Australian coal mines. The model was developed for ribs that are supported by bolts both with and without mesh. The rib support rating (RIBSUP) is estimated as

$$RIBSUP = \frac{L_{rb} \times N_{rb} \times \sqrt{Sh_{rb}}}{S_{rb} \times h} + \sqrt{\frac{A_{fp}}{A_{sp}}} + \left[1 + 3 \times \frac{A_s}{100} \right]$$

where

L_{rb} = Length of the rib bolt/dowel (m),

N_{rb} = Average number of bolts/dowels per vertical row,

Sh_{rb} = Typical shear strength of the rib bolt/dowel (kN),

S_{rb} = Spacing between vertical rows of bolt/dowels (m),

h = Development height (m),

A_{fp} = Area of face plate (m²),

A_{sp} = Area of standard plate (m²), and

A_s = Percentage of surface area covered.

Steel plates with dimensions 16 in. x16 in. (0.165 m²) are the most commonly used in the studied mines. Therefore, the area of standard plate (A_{sp}) was as assumed to be 16 in. x 16 in.

34th International Conference on Ground Control in Mining

The rib support (RIBSUP) rating was calculated to estimate the density of rib support at the supported sites (Table 3). Figure 17 shows the histogram distribution of rib support density for supported sites. It shows that the supported sites can be divided into two groups: (1) low-density support sites in which RIBSUP is less than 4, and (2) high-density support sites in which RIBSUP is greater than 6. The latter includes sites where bigger bolts with narrow spacing are installed both with and without liners.

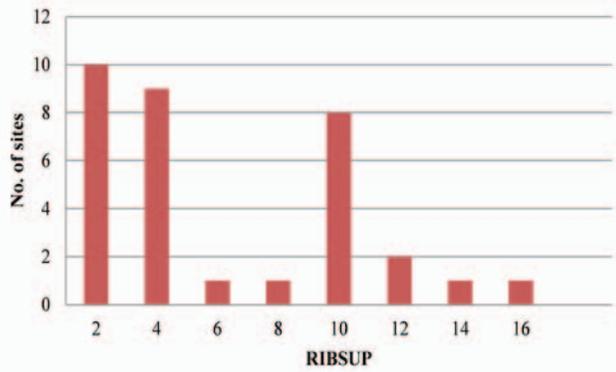


Figure 17. Distribution of Rib Support (RIBSUP) rating at the surveyed sites.

To assess the impact of overburden depth of rib support density, the distribution of these values was plotted (Figure 18). The sites of low-density rib support are marked by squares and diamonds marks the high-density support sites. With the exception of site SR 3-4, (marked by hollow square in Figure 18), the overburden depths at the low-support sites are less than 1,325 ft. Sites with low support densities are usually free of excessive loading conditions such as multiple-seam interactions and tailgate side loading. The RIBSUP rating of the sites of low-density support do not correlate with overburden depth.

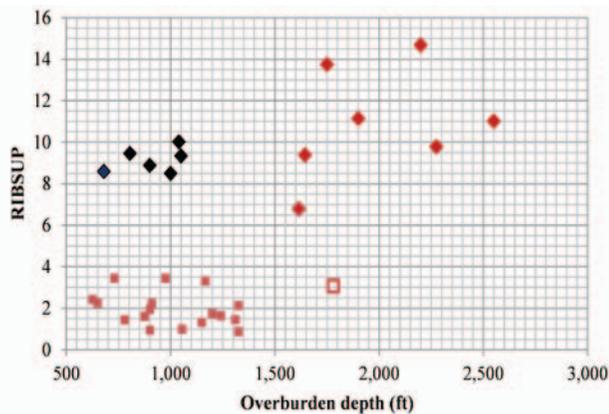


Figure 18. Overburden depth vs. RIBSUP at the surveyed sites. (Squares: low-density support sites; diamonds: high-density support sites.).

The high-density support sites could be subdivided into two subgroups: (1) low overburden depth sites of less than 1,050 ft (marked by black diamonds in Figure 18) in which the high-support rating was achieved through bolt design (such as SR1 mine) or using mesh in addition to rib bolts (such as sites SR 4-2 and SR 7-1), and (2) high overburden depth sites of more than

1,645 ft (marked by red diamonds in Figure 18) in which mesh is consistently used in addition to rib bolts.

Figure 19 shows the distribution of rib support rating versus the spall volume. The figure shows that there is no correlation between the applied rib support density and the measured spall volume. The spall volume ranges from 0 to 4.5 ft³/ft for both low- and high-rib support densities.

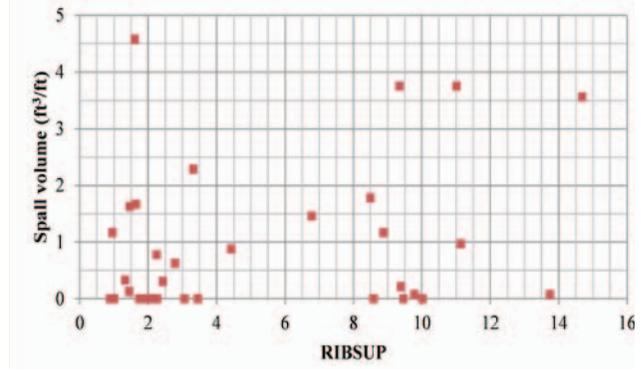


Figure 19. RIBSUP vs. spall volume at the surveyed sites.

Multiple-seam interaction

Multiple-seam mining was recorded for two unsupported mines (USR 5 and USR 7) and three supported mines (SR 1, SR 3, and SR 5). The interburden thicknesses at unsupported mines USR 5 and USR 7 are 65 ft and 104 ft, respectively. The interburden thicknesses at supported sites SR 1, SR 3, and SR 5 are 184 ft, 380 ft, and 480 ft, respectively.

There were no additional measures (such as standing rib support) implemented at mines USR5 and USR 7 to address the effect of multiple-seam-interactions. This is because of shallow overburden depths and no pillar extraction practices. The measured rib spall at mines USR 5 and USR 7 were 0 and 1 ft³/ft-long, respectively.

High-support densities were applied at mines SR1 and SR 3, while support density at mine SR 5 was low. This contrast could be explained by relatively lower overburden depth and relatively large interburden thickness at mine SR 5 compared with mines SR 1 and SR 3.

Effectiveness of rib control to prevent rib injuries in the studied mines

Based on the shape and size of the spalled ribs, four types of rib failures were identified: slabby, slabby/blocky, blocky, and friable. The type of rib failure can be one of the most significant components of the overall hazard of rib failure. In a previous study for the rib fatalities in underground coal mines (Jones, 2013), it was found that 74% of rib fatalities resulted from blocky types of different mechanisms (brow, mine-induced fracture, and slippage along plane of weakness such as slickenside or joint).

Tables 1 and 2 list the type of rib failure at each site. The tables show that 47% of the rib spall was classified as blocky—this could indicate a high potential of rib hazards.

34th International Conference on Ground Control in Mining

The rib injury data for the studied mines was obtained from the U.S. Mine Safety and Health Administration databases (MSHA, 2013). The acquired data for each mine was composed of the number of non-fatal day loss operator injuries and total operating hours for the period of 2011 to 2013. Rib-outburst-related injuries were excluded from this study because outbursts are likely to be influenced by a variety of factors independent of rib support and are beyond the scope of this research. Injury rates were computed by calculating the number of rib incidents in the period of 2011 to 2013 for every 200,000 hours/year.

The overburden depth at the studied mines by far is the most influential factor on rib control. Therefore, the impact of rib control management at the studied mines was assessed by correlating the overburden depth to the computed rib injury rate. The MSHA database does not include the overburden depth at the injury site. Therefore, the overburden depth was computed from an overburden map for each mine as an average overburden depth for the period of the study (2012-2013). Figure 20 shows the distribution of rib injury rate versus the calculated overburdens at the investigated sites. The figure shows that there is no reported rib injury for mines operating at an overburden depth less than 500 ft, with the exception of one case at mine USR 4. The highest rib injury rates are reported for the unsupported and supported mines that are operating at overburden depths between 500 ft and 1,000 ft. Deep mines (greater than 1,000 ft) showed no reported rib injuries, except for mine SR 9.

Figure 20 emphasizes the need for more rib control management for mines operating at overburden depths between 500 ft and 1,000 ft. Similar observations were drawn from the analysis of rib fatalities between 2010 and 2013. The rib fatality rate at mid-depth mines (700-1,250 ft) was found to increase by 225% compared with low-depth mines (less than 700 ft). Meanwhile, the rib fatality rate at deep (greater than 1,250ft) mines was reduced by 61% compared with mid-depth mines (Jones, 2014).

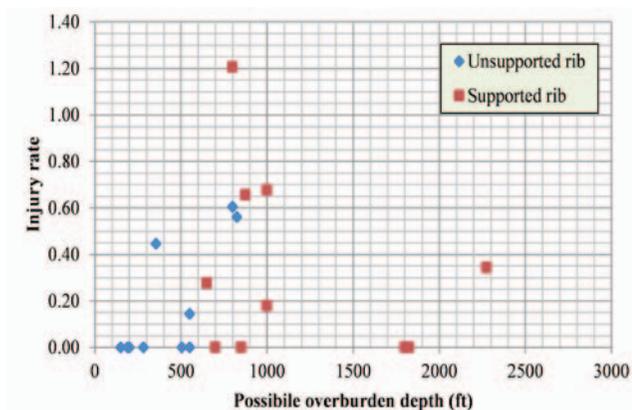


Figure 20. Non-fatal days lost (NFDL) operator rib incidence rate vs. overburden depth at the surveyed sites for 2011-2013.

SUMMARY

Twenty (20) underground coal mines were studied to identify current rib control practices in U.S. coal mines. The studied mines were selected to represent various coal basins, coal seams, geology, loading conditions, and rib control strategies. The collected information will be used to develop a rib support design tool for U.S. coal mines.

The major findings of this paper are:

- At the studied mines, rib bolts are designed based on reactive actions; in which longer and larger diameter bolts are selected to support large rib spalls.
- Rib bolts on their own cannot contain rib spall, especially in soft ribs subjected to significant load. External rib control devices such as mesh (such as; chain link, steel, plastic, etc.) are required in such cases to contain rib sloughing.
- One or more external primary support methods were applied at 40% of the supported mines. Secondary (supplementary) external rib support methods were applied at 50% of the supported mines and at 20% of the unsupported mines. Therefore, any rib design tool should consider the application of external rib supports.
- The majority of the studied mines follow the overburden depth and entry height thresholds recommended by the Program Information Bulletin (PIB) 11-29.
- The collected data is not conclusive regarding the influence of stone percentage on rib control management, but the mutual interaction between the stone percentage and the overburden depth appears to correlate with the use of rib support.
- The number of geological features at supported sites is twice those of the unsupported sites. Potential rib instability occurred when certain geological features prevailed—these include draw slate and/or bone coal near the rib/roof line, claystone partings, and soft coal bench overlain by rock strata.
- There is no correlation between the applied rib support density and the measured spall volume.
- At unsupported mines of shallow overburden depths with no pillar extraction practices, there were no applied measures (such as standing rib support) to address the effect of multiple-seam interactions.
- Forty-seven percent of the observed rib spall was classified as blocky; this could indicate a high potential of rib hazards.
- Rib injury rates of the studied mines stress the need for more rib control management for mines operating at overburden depths between 500 ft and 1,000 ft.

ACKNOWLEDGEMENTS

The authors wish to acknowledge Dr. Tristan Jones for his efforts in collecting much of the field data supporting the results of this paper while employed at NIOSH.

34th International Conference on Ground Control in Mining

DISCLAIMER

This work was conducted as part of the research program of the Office of Mine Safety and Health Research of the National Institute for Occupational Safety and Health (NIOSH). The findings and conclusions in this paper are those of the authors and do not necessarily represent the views of the National Institute for Occupational Safety and Health. Mention of company names, products, or software does not constitute endorsement by NIOSH.

REFERENCES

- Colwell, M. G. and Mark, C. (2005). Analysis and Design of Rib Support (ADRS) – A Rib Support Design Methodology for Australian Collieries. Proceedings, 24th International Conference in Ground Control in Mining, Morgantown, WV, August 2–4, pp. 12-22.
- East, J.A., (2013). Coal Fields of the Conterminous United States—National Coal Resource Assessment updated version: U.S. Geological Survey Open-File Report 2012–1205, one sheet, scale 1:5,000,000, available at <http://pubs.usgs.gov/of/2012/1205/>.
- Jones, T., Mohamed, K., and Klemetti, T. (2014). Investigating the Contributing Factors to Rib Fatalities through Historical Analysis. In Proceedings of the 33rd International Conference on Ground Control in Mining, Morgantown, pp. 113–122.
- Mine Safety and Health Administration. (2011). “Protecting Miners from Hazards Related to Rib Falls.” Program Information Bulletin PIB11-29. www.msha.gov/regs/complain/PIB/2011/pib11-29.asp.
- MSHA (2013). Accident, Illness and Injury and Employment Self-Extracting Files (part 50 data), 2011–2013. Denver, CO: U.S. Department of Labor, Mine Safety and Health Administration, Office of Injury and Employment Information.
- [<http://www.msha.gov/STATS/PART50/p50y2k/p50y2k.HTM>]. Date accessed: Sept. 2013.
- Paul Holmes. (1981). Relations between Geology and the Stability of Faces and Roadways in the Barnsley Seam. Developments in Geotechnical Engineering, Volume 32, 1981, Pages 118–122.
- U.S. Code of Federal Regulations. (2010). Title 30 Part 75.