



Published in final edited form as:

J Occup Environ Hyg. 2017 May ; 14(5): 360–367. doi:10.1080/15459624.2016.1254783.

Elemental properties of coal slag and measured airborne exposures at two coal slag processing facilities

Christopher Mugford¹, Randy Boylstein¹, and Jenna L Gibbs^{1,2}

¹Respiratory Health Division, National Institute for Occupational Safety and Health, Morgantown, WV

²Department of Occupational and Environmental Health, The University of Iowa, Iowa City, IA 52242

Abstract

In 1974, the National Institute for Occupational Safety and Health recommended a ban on the use of silica sand abrasives containing >1% silica due to the risk of silicosis. This gave rise to substitutes including coal slag. An Occupational Safety and Health Administration investigation in 2010 uncovered a case cluster of suspected pneumoconiosis in four former workers at a coal slag processing facility in Illinois, possibly attributable to occupational exposure to coal slag dust. This article presents the results from a National Institute for Occupational Safety and Health industrial hygiene survey at the same coal slag processing facility and a second facility. The industrial hygiene survey consisted of the collection of: a) bulk samples of unprocessed coal slag, finished granule product, and settled dust for metals and silica; b) full-shift area air samples for dust, metals, and crystalline silica; and c) full-shift personal air samples for dust, metals, and crystalline silica.

Bulk samples consisted mainly of iron, manganese, titanium, and vanadium. Some samples had detectable levels of arsenic, beryllium, cadmium, and cobalt. Unprocessed coal slags from Illinois and Kentucky contained 0.43–0.48% (4,300–4,800 mg/kg) silica. Full-shift area air samples identified elevated total dust levels in the screen (2–38 mg/m³) and bag house (21 mg/m³) areas. Full-shift area air samples identified beryllium, chromium, cobalt, copper, iron, nickel, manganese, and vanadium. Overall, personal air samples for total and respirable dust (0.1–6.6 mg/m³ total; and 0.1–0.4 mg/m³ respirable) were lower than area air samples. All full-shift personal air samples for metals and silica were below published occupational exposure limits. All bulk samples of finished product granules contained less than 1% silica, supporting the claim coal slag may present less risk for silicosis than silica sand. We note that the results presented here are solely from two coal slag processing facilities, and more in-depth air monitoring is needed to better characterize occupational exposure to coal slag dust, metals, and silica at similar facilities.

*Corresponding author: Christopher Mugford, 1095 Willowdale Rd., MS 2800, Morgantown, WV 26505; 304-285-6017; CMugford@cdc.gov.

DISCLAIMER

The findings and conclusions in this report are those of the authors and do not necessarily represent the views of the National Institute for Occupational Safety and Health.

Keywords

Coal slag; abrasive substitutes; pneumoconiosis

INTRODUCTION

In 1974, the National Institute for Occupational Safety and Health (NIOSH) recommended a ban on the use of silica sand abrasives containing more than 1% silica due to the elevated risk of silicosis and death among workers using silica-containing abrasives.⁽¹⁾ The NIOSH recommended ban on silica-containing abrasives gave rise to abrasive substitutes including coal slag. Greater than 85% of total recycled coal slag in the United States is now used in abrasive blasting and roofing granules⁽²⁾ because it is relatively inexpensive.⁽³⁾ The physical properties of coal slag make it a suitable abrasive substitute for silica sand. For example, the Mohs mineral hardness of coal slag (>7) is very similar to silica quartz in their potential to fracture into smaller particle sizes.⁽⁴⁾

Coal slag is a recycled byproduct from coal combustion and is often viewed and marketed as 'green', non-hazardous and environmentally friendly by manufacturers.^(5,6) The coal slag processing and recycling industry employs between 6,600 and 14,200 workers nationwide.⁽⁷⁾ It should be noted that these numbers do not include temporary workers. Many coal slag processing facilities are small and employ temporary workers due to seasonal variation and demand from the construction industry.

Limited previous scientific literature has assessed the elemental properties of bulk coal slag^(8–12), but the results varied, likely due to geographic variation of elements in coal seams.⁽³⁾ Nevertheless, bulk sample analysis from Álvarez-Ayuso and Tomás⁽⁸⁾, Stettler et al.⁽¹¹⁾, and MacKay et al.⁽¹²⁾ all identified the presence of carcinogens or suspect carcinogens and other toxic elements.

There is limited information on the pulmonary toxicity potential of coal slag exposure. Some studies of coal slag exposure have demonstrated pulmonary injury, fibrosis, and pneumoconiosis in animal (rat) models.^(3,12) At times, the markers of pulmonary inflammation and fibrosis in rats exposed to coal slag even exceed responses to silica sand blasting agents.⁽¹⁰⁾

Over the last few decades, a number of studies have assessed occupational exposure to metals and particles during abrasive blasting operations with silica sand^(13–19) and fewer studies have assessed occupational exposure to metals and particles during abrasive blasting with coal slag.^(13,20–22) To our knowledge, only a single Occupational Safety and Health Administration (OSHA) investigation in 2010 characterized occupational exposure to dust, silica, and metals during midstream production of coal slag granules at a coal slag processing facility in Illinois.⁽²³⁾

OSHA Investigation

An OSHA investigation in 2010 uncovered a case cluster of suspected pneumoconiosis in four former workers at a coal slag processing facility in Illinois. The suspected

pneumoconiosis cases were considered attributable to occupational exposure to coal slag dust.⁽²³⁾ Medical records including medical and occupational histories, physical examinations, pulmonary function tests, chest x-ray readings, and physicians' assessments and diagnoses for three of the four former workers were obtained by an OSHA medical officer. Three of the four workers were interviewed by the medical officer and described respiratory symptoms within months to years before the end of their employment at the plant. The OSHA compliance officer on-site noted that workers entered "dusty areas," specifically screening and crushing of coal slag granules areas, of the facility with no respiratory protection. Air sampling from the investigation resulted in multiple personal total dust samples from a plant operator and maintenance workers that exceeded the OSHA permissible exposure limit (PEL) of 15 milligrams per cubic meter (mg/m³). One personal respirable crystalline silica (quartz) sample from a maintenance worker exceeded the American Conference of Governmental Industrial Hygienists' (ACGIH) threshold limit value (TLV®) of 0.025 mg/m³ and approached the NIOSH recommended exposure limit (REL) and new OSHA PEL of 0.050 mg/m³.

In response to that OSHA investigation, OSHA required management of the coal slag processing facility to request a health hazard evaluation from NIOSH to assess the potential respiratory health hazards at their facilities. In September 2014, NIOSH performed a comprehensive industrial hygiene survey at the facility where former workers were diagnosed with pneumoconiosis (facility A) and a second facility (facility B). We present here the results of those exposure assessments. Our work expands the current limited understanding of occupational exposures to dust, silica, and metals in coal slag granule production.

Coal Slag Processing

Figure 1 presents the general flow of coal slag processing in the United States. Many slag processing facilities are located in close proximity to coal-fired power plants that utilize wet-bottom boiler systems. Wet-bottom boilers have a solid base with an orifice that periodically opens to drop the spent molten slag into quenching water. When the molten slag comes into contact with the quenching water, the rapid cooling of the slag causes it to break apart into small, glass-like pellets. The water/slag mixture is usually transported by high pressure water lines from the power plant into outdoor collection basins where it is collected and brought to the slag processing facility. Most of the processes at the slag processing facility take place in the outdoor environment, although workers may operate controls and perform administrative tasks indoors.

The processing of coal slag typically involves crushing and screening of coal slag, and storing and/or bagging of finished product granules. In addition to receiving coal slag from a neighboring power plant, unprocessed coal slag may be delivered from coal-fired power plants in other areas of the United States for processing.

Coal slag is initially dropped into a feed hopper that funnels material onto a conveyor belt. A series of magnets on the conveyor belt may be used to remove unwanted metals. Next, the coal slag is placed in a rotating dryer oven to remove moisture content. The coal slag then goes through a screening process that sifts oversized coal slag pieces for reprocessing

through a crusher until the desired particle diameter is achieved for a specific type of product. This process may be repeated numerous times depending on the number of screens and crushers at the processing facility. The finished product granules are conveyed for bagging, warehouse storage, or directly loaded for truck or rail transport.

Job titles reported during the NIOSH industrial hygiene survey included maintenance, plant operator, plant manager, bagger, heavy equipment operator, environmental health and safety (EHS) manager, and office coordinator.

METHODS

Industrial Hygiene Survey

In September 2014, three NIOSH industrial hygienists performed a comprehensive industrial hygiene survey at two coal slag processing facilities. The survey was conducted over two days at each facility and included the collection of bulk material samples of unprocessed coal slag, finished product granules, and settled dust; and full-shift area and personal air samples for respirable and total dust, metals, and crystalline silica (quartz).

Bulk samples were collected by scooping the bulk material or settled dust into a 50-ml plastic Corning centrifuge tube while wearing nitrile gloves and excluding large solids. Bulk samples were analyzed following NIOSH Method 7500 (silica) and NIOSH Method 7303 (metals).⁽²⁴⁾ Bulk and air samples were digested and analyzed for the following metals: arsenic (As), beryllium (Be), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), titanium (Ti), and vanadium (V) using inductively coupled plasma atomic emission spectroscopy (ICP-AES). Platinum (Pt) was analyzed using inductively coupled plasma mass spectrometry (ICP-MS).

Full-shift personal and area respirable dust samples were collected using an aluminum cyclone (SKC, Inc., Eighty Four, PA) with a two-piece, 37-mm cassette fitted with a polyvinyl carbonate (PVC) filter and analyzed using NIOSH Method 0600. Respirable silica was analyzed using NIOSH Method 7500. Full-shift personal and area total dust and metals samples were collected using an open-faced, two-piece, 37-mm cassette (SKC, Inc., Eighty Four, PA) loaded with a PVC filter and analyzed using NIOSH Method 0500 and then analyzed for metals using NIOSH Method 7303.

All samplers were connected to a precision flow air sampling pump (Sensidyne, St. Petersburg, FL) set at the desired flow rate. Each sampling pump was calibrated prior to and after sampling using a high performance linear mass flow meter (TSI Inc., Shoreview, MN) to ensure flow rate accuracy.

RESULTS

The bulk sample results of unprocessed coal slag, finished product granules, and settled slag dust from the coal slag processing facilities are presented in Table I. Fe was the major element identified in bulk samples. Some samples contained Mn, Ni, Ti, and V at levels above 100 milligrams per kilograms (mg/kg). Be was detected in some unprocessed coal slag (0.22 – 4.1 mg/kg), but below the limit of detection (<LOD) in finished product granules.

Unprocessed coal slag from Illinois, Kentucky, and Wyoming contained 0.43 – 0.48% (4,300 – 4,800 mg/kg) silica. Only one finished product granule bulk sample (facility A; Sample D) had detectable levels of silica (0.34%; 3,400 mg/kg). Settled dust collected from the warehouse and screen house at facility A ranged from <LOD -- 2.6% (<LOD -- 26,000 mg/kg) silica.

The area air sampling results are presented in Tables II (dust) and III (metals). The highest full-shift total dust area air samples were observed outside the screen house (facility B: 38 mg/m³), inside the screen house (facility A: 11 and 2 mg/m³; facility B: 25 mg/m³), outside the bag house (facility B: 21 mg/m³), and outside the quality control screen area (facility A: 6.6 mg/m³). The highest full-shift respirable dust area air samples were located inside the screen house (facility A: 2.29 mg/m³; facility B: 0.36 mg/m³) and outside the quality control screen area (facility A: 0.50 mg/m³). Cr, Fe, and Ti were identified in all area sample locations. At facility A, measurable levels Co, Cu, Mn, Ni, and V were observed in the screen house, 2nd floor. At facility B, measurable air levels of Be, Co, Mn, and V were observed outside the bag house, near the drying oven, and inside and outside the screen house. Most metals were <LOD in other area sample locations. Detectable levels of silica were measured inside the screen house at facility A (0.005 mg/m³), however all other area sample locations were <LOD (silica data not shown in Table II).

The personal air sampling results are presented in Tables IV (dust) and V (metals). The highest total dust levels were measured on two baggers (6.56 and 1.98 mg/m³), an office coordinator (1.26 mg/m³), and a plant operator (1.14 mg/m³). Overall, personal respirable dust levels were low, with all samples <0.5 mg/m³. The highest respirable dust levels were measured on a maintenance worker (0.37 mg/m³) and a bagger (0.14 mg/m³). Full-shift TWA results of As, Be, Cd, Co, Pb, Ni, Pt, and silica were <LOD and below applicable OSHA PELs. The highest personal metal exposures were to Fe. However, no Fe exposures exceeded the OSHA PEL of 10,000 micrograms per cubic meter (µg/m³). Cr, Mn, Ti, and V were all present in personal air samples, but below their applicable OSHA PELs.

DISCUSSION

The collection of bulk samples was done to investigate if potentially hazardous materials are present in the coal slag that may contribute to lung disease. The bulk samples collected in this study yielded different amounts of silica and metals. Interestingly, bulk samples from different regions of the country presented slightly different results. For example, unprocessed coal slag from Illinois and Kentucky yielded detectable amounts of silica, whereas unprocessed coal slag from Wyoming was <LOD for silica. Regional differences in geology and coal formation may explain this variability.^(11,25) We observed that bulk samples of finished product granules contained less than 1% (10,000 mg/kg) silica. The small amounts of silica observed in the bulk samples support the claim that coal slag abrasives reduce silica exposure compared to silica sand and may reduce the risk of silicosis during blasting operations.

Personal air sampling results for dust and silica were much lower than previous OSHA air sampling results---particularly in plant operators and maintenance workers.⁽²³⁾ Although the

OSHA investigation in 2010 resulted in several airborne measurements above the PEL for total dust, measurements from our surveys were all well below the OSHA PEL for total dust. We observed all personal samples with air levels of total dust below 2 mg/m³ with the exception of one sample collected on a bagger (6.56 mg/m³). Elevated levels of dust for the bagger may be due to the use of compressed air to seal the bag during bagging and its potential to make dust become airborne. The lower worker exposures to total dust observed in our survey were likely due to changes in operational procedures after the OSHA investigation. These changes included restricting workers from entering the screen house during operation and performing maintenance checks before start-up.

Although personal air samples were generally low, specific work areas were identified to have elevated levels of dust and metals. Total dust area air samples exceeded the OSHA PEL inside the screen house at both facilities and by the bag house of facility A. OSHA PELs are specified for personal samples, and area samples cannot be used for enforcement. However, the area sample results suggest that the screen house and bag house are areas with potential for high dust personal exposures and may be a source of exposure at other similar facilities. The screen house contained a series of screens and crushers that generated visible dust during operation and resulted in measurable airborne levels of Be, Cr, Co, Cu, Fe, Mn, Ni, Ti, and V. Fe was measured in all area samples, and highest in samples collected at the screen house and bag house. Iron oxide exposure is associated with “siderosis”, a type of pneumoconiosis which is usually not fibrotic.⁽²⁶⁾ Exposure to both iron oxide and silica or silicates is associated with mixed dust pneumoconiosis (MDP) or “siderosilicosis.” The OSHA investigators suggested the cases of pneumoconiosis at Facility A were consistent with siderosilicosis or MDP.⁽²³⁾

Our findings may have implications for other similar coal slag processing facilities. In addition, the case cluster of pneumoconiosis discovered during the facility’s OSHA inspection suggests that workers at similar facilities may be at risk for lung disease associated with coal slag dust. Workers involved in tasks near high risk areas (e.g., screen house and bag house) may be exposed to elevated levels of metal or silica containing dust that may contribute to potential coal slag dust related lung diseases. Additional personal and area air monitoring is needed to accurately characterize airborne exposures at similar coal slag processing facilities, with special attention given to high risk areas. In addition, ongoing health surveillance of workers who process or use coal slag is needed to better characterize the risk of lung disease in this industry. Regional variations in coal content suggest bulk sample analysis should be conducted routinely to further assess regional differences in geology and coal formation.

It is important to note that coal slag is not the only substitute in use since NIOSH’s recommended ban on silica sand abrasives containing >1% silica. Occupational exposure to other slag abrasives, such as copper slag, have not been well characterized, but may present similar risks during processing. Copper slag is a byproduct of smelting operations and processed in similar fashion to coal slag. Previous studies have assessed the elemental composition of bulk copper slag^(11,12, 27) and identified the presence of carcinogens or suspect carcinogens and other toxic elements. Thus, exposures during the processing of copper slag also warrant investigation.

LIMITATIONS

There are several limitations to our investigation. The scope of our survey was limited to only two coal slag processing facilities. During the time of the investigation, the company changed operations procedures that likely reduced worker exposure, which may have underestimated exposure when compared to similar facilities. There are also sample analysis limitations to take into consideration. The sample preparation technique used (spectroscopy) may not have been capable of completely digesting all chemical forms and sizes of analyte-containing particles to their dissolved form to yield accurate determinations of elemental mass levels. In addition, complete digestion followed by analysis using spectroscopy is only capable of determining the total mass levels in a sample and is unable to identify chemical form, which is biologically relevant.

CONCLUSION

Results from this study contribute to the limited understanding of potential occupational exposure to dust, metals and silica at coal slag processing facilities. Harmful metals were identified in bulk samples of coal slag, however, we did not observe high levels of metals in full-shift area and personal air samples. Low levels of worker exposure to dust and silica were likely due to administrative controls that were implemented after the OSHA investigation. The regional variability observed in the bulk samples of coal slag in our survey suggest that additional bulk analysis should be conducted from other coal slags to further assess regional differences in geology and coal formation.

We observed risk for high exposures to total dust in the screen house and bag house. Because screening and crushing are critical steps in producing size specific granules and are used widely in coal slag production, workers at other processing facilities may be exposed to elevated dust and metal levels if exposure levels are not mitigated with engineering and/or administrative controls.

Further investigation is needed to better understand occupational exposures in this industry. Additional exposure monitoring and health surveillance among workers that process coal slag abrasives will help expand the limited understanding of occupational exposures and health outcomes.

Acknowledgments

The authors would like to thank the coal slag processing facility employees for agreeing to participate in the NIOSH Health Hazard Evaluation Program. We would also like to thank Aleksandr Stefaniak, Brie Hawley, and Kristin Cummings from the NIOSH Respiratory Health Division for their scientific comments and thoughtful review of this report.

References

1. National Institute for Occupational Safety and Health (NIOSH). Criteria for a Recommended Standard: Occupational Exposure to Crystalline Silica. Washington, D.C: DHHS (NIOSH); 1974. (Pub. No. 75-120)

2. American Coal Ash Association. [accessed September 16, 2016] 2013 Coal Combustion Product (CCP) Production & Use Survey Report. Available at <http://www.acaa-usa.org/Portals/9/Files/PDFs/2013ReportFINAL.pdf>
3. Stettler LE, Salomon RA, Platek SF, Moorman WJ, Clark JC, Krieg EF, Phipps FC. Fibrogenic potentials of coal slags used as abrasive blasting substitutes. *J Tox and Env Health*. 1995; 45(3): 349–365.
4. Momber, A. Blast cleaning technology. Hamburg, Germany: Springer; 2008. p. 13-15.
5. Opta Minerals, Inc. [accessed September 16, 2016] Blackblast: Coal Slag. Available at: <http://www.optaminerals.com/Abrasives/Blackblast-Coal-Slag.html>
6. Black Beauty. [accessed September 16, 2016] The original black beauty. Available at: <http://www.blackbeautyabrasives.com/products/black-beauty-original-abrasives.php>
7. North American Industry Classification System (NAICS). 32799204-Aggregate/crushed slag and 327910 abrasives manufacturing. Washington, D.C: U.S. Census Bureau; 2007. Available at: <http://www.census.gov/cgi-bin/sssd/naics/naicsrch> [accessed September 16, 2016]
8. Alvarez-Ayuso E, Tomas A. Environmental impact of coal combustion plant: Abatement capacity of desulphurization process and environmental characterization of combustion by-products. *Chemosphere*. 2006; 65:2009–2017. [PubMed: 16890268]
9. Konieczny ski J, Zajusz-Zubek E. Distribution of selected trace elements in dust containment and flue gas desulphurisation products from coal-fired power plants. *Arch of Env Prot*. 2011; 37:3–14.
10. Hubbs AF, Minhas NS, Jones W, et al. Comparative pulmonary toxicity of 6 abrasive blasting agents. *Tox Sci*. 2001; 61:135–143.
11. Stettler LE, Donaldson HM, Grant CG. Chemical composition of coal and other mineral slags. *Am Ind Hyg Assoc J*. 1982; 43:235–238.
12. Mackay GR, Stettler LE, Kommineni C, Donaldson HM. Fibrogenic potential of slags used as substitutes for sand in abrasive blasting operations. *Am Ind Hyg Assoc J*. 1980; 41:836–842. [PubMed: 7457375]
13. Aizenburgh V, England E, Grinshpun S, Willeke K, Carlton G. Metal exposures among abrasive blasting workers at four U.S. Air Force facilities. *Appl Occ and Env Hyg*. 2000; 15(10):766–772.
14. Conroy LM, Menezes-Lindsay RM, Sullivan PM. Lead, chromium, and cadmium emission factors during abrasive blasting operations by bridge painters. *Am Ind Hyg Ass*. 1995; 56(3):266–271.
15. Conroy LM, Menezes-Lindsay RM, Sullivan PM, Cali S, Forst L. Lead, chromium, and cadmium exposure during abrasive blasting. *Arch of Env Health: An International Journal*. 1996; 51(2):95–99.
16. Flanagan ME, Seixas N, Becker P, Takacs B, Camp J. Silica exposure on construction sites: results of an exposure monitoring data compilation project. *J Occ and Env Hyg*. 2006; 3(3):144–152.
17. Madl AK, Donovan EP, Gaffney SH, McKinley MA, Moody EC, Henshaw JL, Paustenbach DJ. State-of-the-science review of the occupational health hazards of crystalline silica in abrasive blasting operations and related requirements for respiratory protection. *J of Tox and Env Health*. 2008; 11(7):548–608.
18. Radnoff DL, Kutz MK. Exposure to crystalline silica in abrasive blasting operations where silica and non-silica abrasives are used. *Ann of Occ Hyg*. 2014; 58(1):19–27.
19. Rappaport SM, Goldberg M, Susi P, Herrick RF. Excessive exposure to silica in the US construction industry. *Ann of Occ Hyg*. 2003; 47(2):111–122.
20. National Institute for Occupational Safety and Health (NIOSH) and KTA-Tator, Inc. Evaluation of substitute materials for silica sand in abrasive blasting (NIOSH contract# 200-95-2946). Pittsburgh, PA: U.S. Department of Health and Human Services, National Institute for occupational Safety and Health; 1998.
21. Stephenson D, Spear T, Seymour M, Cashell L. Airborne exposure to heavy metals and total particulate during abrasive blasting using copper slag abrasive. *App Occ and Env Hyg*. 2002; 17(6):437–443.
22. Meeker JD, Susi P, Pellegrino A. Comparison of occupational exposures among painters using three alternative blasting abrasives. *J of Occ and Env Hyg*. 2006; 3(9):D80–D84.
23. Fagan KM, Cropsey EB, Armstrong-Gibbs JL. Case cluster of pneumoconiosis at a coal slag processing facility. *Am J of Ind Med*. 2015; 58:568–576. [PubMed: 25851166]

24. Schlecht, PC., O'Connor, PF., editors. NIOSH. NIOSH manual of analytical methods (NMAM®). 4. Cincinnati, OH: U.S. Department of Health and Human Services, Centers for Disease Control and Prevention, National Institute for Occupational Safety and Health; 2015. DHHS (NIOSH) Publication 94-113 (August 1994); 1st Supplement Publication 96-135, 2nd Supplement Publication 98-119; 3rd Supplement 2003-154. Available at <http://www.cdc.gov/niosh/docs/2003-154/> [accessed September 16, 2016]
25. Dai S, Seredin VV, Ward CR, Jiang J, Hower JC, Song X, Jiang Y, Wang X, Gomostaeva T, Li X, Liu H, Zhao L, Zhao C. Composition and modes of occurrence of minerals and elements in coal combustion products derived from high-Ge coals. *Int J of Coal Geology*. 2014; 121:79-97.
26. Chong S, Lee KS, Chung MJ, Han J, Kwon OJ, Kim TS. Pneumoconiosis: Comparison of imaging and pathologic findings. *Radiographics*. 2006; 26:59-77. [PubMed: 16418244]
27. Porter DW, Hubbs AF, Robinson VA, Battelli LA, Greskevitch M, Barger M, Landsittel D, Jones W, Castranova V. Comparative pulmonary toxicity of blasting sand and five substitute abrasive blasting agents. *J of Tox and Env Health*. 2002; 65(16):1121-1140.

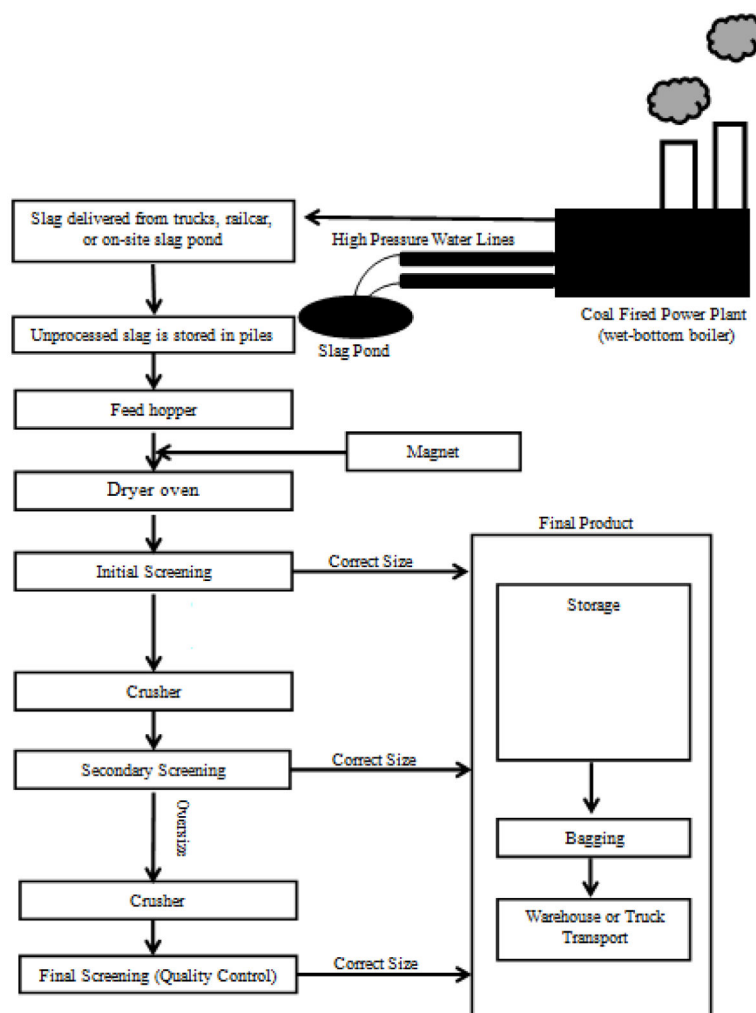


FIGURE I.
Generalized coal slag process flow diagram.

TABLE I

Elemental analysis of bulk samples from two coal slag processing facilities, 2014 (mg/kg)

Facility A	As	Be	Cd	Cr	Co	Cu	Fe	Pb	Mn	Ni	Pt	Ti	V	Quartz
Settled Dust; Screen House; 3 rd Floor	<LOD	<LOD	1.5	80	21	51	46,000	14	280	66	0.08	4,000	130	18,000
Settled Dust; Screen House; 2 nd Floor	20	<LOD	1.6	84	22	53	47,000	<LOD	300	69	0.07	4,200	130	12,000
Settled Dust; Warehouse; Loading Station	<LOD	<LOD	1.8	76	24	1,300	58,000	75	500	62	0.08	5,200	140	26,000
Settled Dust; Warehouse; Bagging Station	<LOD	<LOD	0.77	76	26	35	58,000	<LOD	450	50	<LOD	5,600	170	<LOD
Finished Product Granule A	<LOD	<LOD	1.1	76	29	51	59,000	<LOD	460	49	<LOD	7,100	190	<LOD
Finished Product Granule B	<LOD	<LOD	0.83	72	25	45	59,000	<LOD	440	44	0.07	5,800	180	<LOD
Finished Product Granule C	<LOD	<LOD	0.73	75	55	79	60,000	<LOD	460	160	0.04	6,700	190	<LOD
Finished Product Granule D	<LOD	<LOD	0.8	70	21	35	55,000	<LOD	480	42	0.06	4,200	160	3,400
Finished Product Granule E	<LOD	<LOD	0.9	78	28	47	60,000	<LOD	460	48	0.07	6,900	190	<LOD
Facility B	As	Be	Cd	Cr	Co	Cu	Fe	Pb	Mn	Ni	Pt	Ti	V	Quartz
Raw Slag (IL)	<LOD	0.26	<LOD	4.9	0.82	2.3	5,900	<LOD	25	<LOD	<LOD	92	5.6	4,600
Raw Slag (KY)	<LOD	4.1	0.95	41	16	8.1	61,000	<LOD	210	64	0.03	1,000	92	4,300
Raw Slag (WY)	<LOD	<LOD	<LOD	55	21	30	32,000	<LOD	150	36	<LOD	5,500	160	<LOD
Raw Slag (IL)	<LOD	0.22	<LOD	<LOD	0.93	<LOD	3,100	<LOD	9.8	<LOD	<LOD	44	<LOD	4,800
Slag on Conveyor Belt	<LOD	0.3	<LOD	<LOD	<LOD	<LOD	4,300	<LOD	17	<LOD	0.04	61	6.9	5,100
Primary Magnet	28	<LOD	8.4	93	340	320	520,000	10	830	1,400	<LOD	260	110	8,600
Settled Dust; Bag House	<LOD	1.7	1.5	43	15	30	51,000	16	200	100	<LOD	1,000	64	16,000
Finished Product Granule A	<LOD	<LOD	0.53	16	8.1	9	17,000	<LOD	73	17	0.02	1,400	44	<LOD
Finished Product Granule B	<LOD	<LOD	0.57	33	14	8.6	40,000	<LOD	150	35	0.02	1,900	72	<LOD
LOD	20	0.096	0.4	3	0.3	2	1.4	10	6.2	6	0.02	1	3	2,300

Note: arsenic (As), beryllium (Be), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), platinum (Pt), vanadium (V); mg/kg-milligrams per kilogram; <LOD-below the limit of detection; Finished product granules vary in granule diameter and are designated by A–E

TABLE IIArea air sampling results; total and respirable dust (mg/m³) from two coal slag processing facilities, 2014

Facility A	Total Dust	Respirable Dust
Bagging Station (Indoor)	0.65	0.16
Control Room (Indoor)	0.21	0.06
Feed Hopper (Indoor)	0.16	0.02
Quality Control Screen (Outdoor)	6.63	0.50
Screen House, 2 nd Floor (Indoor)	11.1	2.29
Screen House, 1 st Floor (Indoor)	2.00	0.31
Facility B	Total Dust	Respirable Dust
Baghouse (Outdoor)	20.8	0.09
Drying Oven (Outdoor)	6.84	0.04
Control Room (Indoor)	0.09	<LOD
Loading Dock (Outdoor)	<LOD	<LOD
Screen House (Outdoor)	37.6	0.03
Screen House (Indoor)	25.1	0.36
North of Slag Plant, Towards the Power Plant (Outdoor) - A	0.35	<LOD
North of Slag Plant, Towards the Power Plant (Outdoor) - B	<LOD	--
<i>LOD (mg/sample)</i>	<i>0.04</i>	<i>0.04</i>
<i>OSHA PEL^A</i>	<i>15</i>	<i>5</i>

Note: mg/m³-milligrams per cubic meter; <LOD-below limit of detection; "--" no sample collected;

^A Note that this limit applies only to personal samples and is only listed for guidance on workplace controls. The LOD for each analyte is below its respective OSHA PEL.

TABLE III

Area air sampling results; metals ($\mu\text{g}/\text{m}^3$) from two coal slag processing facilities, 2014

Location	As	Be	Cd	Cr	Co	Cu	Fe	Pb	Mn	Ni	Pt	Ti	V
Facility A													
Bagging Station (Indoor)	<LOD	<LOD	<LOD	0.35	<LOD	<LOD	42.4	<LOD	<LOD	<LOD	<LOD	4.68	0.32
Control Room (Indoor)	<LOD	<LOD	<LOD	0.4	<LOD	0.6	11.6	<LOD	<LOD	<LOD	<LOD	1.08	<LOD
Feed Hopper (Indoor)	<LOD	<LOD	<LOD	0.39	<LOD	1.05	22.7	<LOD	<LOD	<LOD	<LOD	0.92	<LOD
Quality Control Screen (Outdoor)	<LOD	<LOD	<LOD	1.1	<LOD	<LOD	231	<LOD	1.59	1.27	<LOD	24.5	0.79
Screen House, 2 nd Floor (Indoor)	<LOD	<LOD	<LOD	2.9	0.55	1.33	785	<LOD	5.46	1.88	<LOD	87.0	2.39
Screen House, 1 st Floor (Indoor)	<LOD	<LOD	<LOD	0.87	<LOD	<LOD	286	<LOD	2.14	<LOD	<LOD	34.3	0.87
Facility B													
Bag House (Outdoor)	<LOD	0.03	<LOD	2.23	0.37	1.06	2,531	<LOD	7.74	2.08	<LOD	32.8	1.64
Drying Oven (Outdoor)	<LOD	0.03	<LOD	1.71	0.36	<LOD	1,041	<LOD	3.99	<LOD	<LOD	25.7	1.38
Control Room (Indoor)	<LOD	<LOD	<LOD	0.51	<LOD	0.67	17.3	<LOD	<LOD	<LOD	<LOD	0.59	<LOD
Loading Dock (Outdoor)	<LOD	<LOD	<LOD	0.57	<LOD	<LOD	7.19	<LOD	<LOD	<LOD	<LOD	0.16	<LOD
Screen House (Outdoor)	<LOD	0.1	<LOD	2.6	0.67	<LOD	2,602	<LOD	9.4	2.89	<LOD	60.7	3.18
Screen House (Indoor)	<LOD	0.11	<LOD	3.76	0.78	0.95	2,507	<LOD	9.69	3.53	<LOD	44.5	3.08
North of Slag Plant, Towards the Power Plant (Outdoor)	<LOD	<LOD	<LOD	0.41	<LOD	<LOD	44.2	<LOD	<LOD	<LOD	<LOD	1.47	<LOD
LOD ($\mu\text{g}/\text{sample}$)	1	0.01	0.06	0.2	0.06	0.5	0.6	0.8	0.09	0.8	0.001	0.1	0.3
OSHA PEL ^A	10	2	5	1,000	100	100	10,000 ^B	50	5,000 ^C	1,000	NA	15,000	500 ^{D,C}

Note: arsenic (As), beryllium (Be), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), platinum (Pt), vanadium (V); $\mu\text{g}/\text{m}^3$ -micrograms per cubic meter;

^ANote that this limit applies only to personal samples and is only listed for guidance on workplace controls. The LOD for each analyte is below its respective OSHA PEL;

^Biron oxide;

^Cceiling;

^Drespirable fraction;

NA-no applicable OSHA PEL

TABLE IV

Personal air sampling results by job title; total and respirable dust (mg/m³) from two coal slag processing facilities, 2014

Job Title	Dust	
	Total (mg/m ³)	Respirable (mg/m ³)
Maintenance	--	0.08
Maintenance	--	0.37
Maintenance	--	0.12
Maintenance	0.34	<LOD
Plant operator	1.14	0.07
Plant operator	0.21	<LOD
Plant manager	0.27	--
Plant manager	0.12	--
Bagger	1.97	0.14
Bagger	6.56	--
Heavy equipment operator	0.34	<LOD
Heavy equipment operator	0.30	<LOD
EHS manager	0.62	0.06
EHS manager	0.22	<LOD
Office coordinator	1.26	<LOD
<i>LOD (mg/samples)</i>	<i>0.04</i>	<i>0.04</i>
<i>OSHA PEL</i>	<i>15</i>	<i>5</i>

Note: mg/m³-milligrams per cubic meter; <LOD-below limit of detection; "--" no sample collected. The LOD for each analyte is below its respective OSHA PEL.

TABLE V

Personal air sampling results by job title; metals ($\mu\text{g}/\text{m}^3$) in total dust from two coal slag processing facilities, 2014

Job Title	As	Be	Cd	Cr	Co	Cu	Fe	Pb	Mn	Ni	Pt	Ti	V
Maintenance Worker	<LOD	<LOD	<LOD	0.28	<LOD	<LOD	39.14	<LOD	<LOD	<LOD	<LOD	1.39	<LOD
Plant Operator	<LOD	<LOD	<LOD	0.7	<LOD	1.18	83.99	<LOD	0.93	<LOD	<LOD	13.14	0.51
Plant Operator	<LOD	<LOD	<LOD	0.95	<LOD	3.49	134.12	<LOD	<LOD	<LOD	<LOD	2.57	<LOD
Plant Manager	<LOD	<LOD	<LOD	0.64	<LOD	<LOD	22.79	<LOD	<LOD	<LOD	<LOD	0.85	<LOD
Plant Manager	<LOD	<LOD	<LOD	0.4	<LOD	<LOD	13.8	<LOD	<LOD	<LOD	<LOD	1.28	<LOD
Bagger	<LOD	<LOD	<LOD	0.9	<LOD	<LOD	155.14	<LOD	1.1	<LOD	<LOD	18.34	0.58
Bagger	<LOD	<LOD	<LOD	1.44	<LOD	<LOD	568.34	<LOD	3.93	<LOD	<LOD	59.02	1.68
Heavy Equipment Operator	<LOD	<LOD	<LOD	0.64	<LOD	<LOD	21.36	<LOD	<LOD	<LOD	<LOD	1.31	<LOD
Heavy Equipment Operator	<LOD	<LOD	<LOD	0.72	<LOD	<LOD	26.28	<LOD	<LOD	<LOD	<LOD	2.63	<LOD
EHS Manager	<LOD	<LOD	<LOD	0.47	<LOD	<LOD	20.27	<LOD	<LOD	<LOD	<LOD	5.03	<LOD
EHS Manager	<LOD	<LOD	<LOD	0.71	<LOD	<LOD	44.85	<LOD	<LOD	<LOD	<LOD	0.66	<LOD
Office Coordinator	<LOD	<LOD	<LOD	0.55	<LOD	<LOD	57.76	<LOD	<LOD	<LOD	<LOD	4.57	<LOD
LOD ($\mu\text{g}/\text{sample}$)	1	0.01	0.06	0.2	0.06	0.5	0.6	0.8	0.09	0.8	0.001	0.1	0.3
PEL	10	2	5	1,000	100	100	10,000 ^B	50	5,000 ^C	1,000	NA	15,000	500 ^{D,C}

Note: arsenic (As), beryllium (Be), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), platinum (Pt), vanadium (V); <LOD=below limit of detection.
The LOD for each analyte is below its respective OSHA PEL;

^B iron oxide;

^C ceiling;

^D respirable fraction;

NA=no applicable OSHA PEL